



Air Conditioners

Technical Data

VRV[®]

4-way blow ceiling mounted cassette



EEDEN11-204

FXZQ-M9



Air Conditioners

Technical Data

VRV[®]

4-way blow ceiling mounted cassette



EEDEN11-204

FXZQ-M9

TABLE OF CONTENTS

FXZQ-M9

1	Specifications	2
	Technical Specifications	2
	Electrical Specifications	3
2	Safety device settings	4
	Safety Device Settings	4
3	Options	5
	Options	5
4	Capacity tables	6
	Cooling Capacity Tables	6
	Heating Capacity Tables	8
	Capacity Correction Factor	10
5	Dimensional drawings	11
	Dimensional Drawings	11
6	Centre of gravity	13
	Centre of Gravity	13
7	Piping diagrams	14
	Piping Diagrams	14
8	Wiring diagrams	15
	Wiring Diagrams - Single Phase	15
9	Sound data	16
	Sound Level Data	16
	Sound Pressure Spectrum	17
10	Air flow patterns	19
	Air Flow Pattern - Cooling	19
	Air Flow Pattern - Heating	21
11	Fan characteristics	23
	Fan Characteristics	23

1 Specifications

1-1 Technical Specifications					FXZQ15M9		FXZQ20M9		FXZQ25M9		FXZQ32M9		FXZQ40M9		FXZQ50M9	
Cooling capacity	Nom.			kW	1.7 (1)		2.2 (1)		2.8 (1)		3.6 (1)		4.5 (1)		5.6 (1)	
Heating capacity	Nom.			kW	1.9 (2)		2.5 (2)		3.2 (2)		4.0 (2)		5.0 (2)		6.3 (2)	
Power input - 50Hz	Cooling	Nom.		kW	0.073 (1)						0.076 (1)		0.089 (1)		0.115 (1)	
	Heating	Nom.		kW	0.064 (2)						0.068 (2)		0.080 (2)		0.107 (2)	
Casing	Colour				Unpainted											
	Material				Galvanised steel											
Dimensions	Unit	Height	mm		260		286									
		Width	mm		575											
		Depth	mm		575											
	Packed unit	Height	mm		371											
		Width	mm		675											
		Depth	mm		681											
Weight	Unit			kg	18											
	Packed unit			kg	22											
Decoration panel	Model				BYFQ60B7W1											
	Colour				Pure White (RAL 9010)											
	Dimensions	Height	mm		55											
		Width	mm		700											
		Depth	mm		700											
	Weight				kg	2.7										
Heat exchanger	Rows	Quantity			2											
	Fin pitch			mm	1.5											
	Face area			m²	0.269											
	Stages	Quantity			10											
	Tube type				ø7 Hi-XSS											
Fan	Type				Turbo fan											
	Quantity				1											
	Air flow rate - 50Hz	Cooling	High	m³/min	8.1	9.0		9.5		11.0		14.0				
			Low	m³/min	7				7.5		8.0		10.0			
Fan motor	Quantity				1											
	Output	High		W	55											
	Drive				Direct drive											
Sound power level	Cooling	High		dBA	46	47		49		53		58				
Sound pressure level	Cooling	High		dBA	29	30		32		36		41				
		Low		dBA	25				26		28		33			
Refrigerant	Type				R-410A											
	Control				Electronic expansion valve											
Piping connections	Liquid	Type			Flare connection											
		OD		mm	6.35											
	Gas	Type			Flare connection											
		OD		mm	12.7											
	Drain				VP20 (I.D. 20/O.D. 26)											
Temperature control					Microprocessor thermostat for cooling and heating											
Air filter					Resin net with mold resistance											
Safety devices	Item				Fuse											

Standard Accessories : Insulation for fitting;
 Standard Accessories : Washer for hanger bracket;
 Standard Accessories : Screws;
 Standard Accessories : Clamps;
 Standard Accessories : Sealing pads;
 Standard Accessories : Washer fixing plate;
 Standard Accessories : Clamp metal;
 Standard Accessories : Drain hose;
 Standard Accessories : Paper pattern for installation;
 Standard Accessories : Installation and operation manual;

1 Specifications

1-2 Electrical Specifications				FXZQ15M9	FXZQ20M9	FXZQ25M9	FXZQ32M9	FXZQ40M9	FXZQ50M9
Power supply	Name			V1					
	Phase			1~					
	Frequency		Hz	50					
	Voltage		V	220-240					
Voltage range	Min.		%	-10					
	Max.		%	10					
Current - 50Hz	Zmax	List		No requirements					
	Minimum circuit amps (MCA)		A	0.8				0.9	
	Maximum fuse amps (MFA)		A	15					
	Full load amps (FLA)	Total	A	0.6				0.7	

Notes

- (1) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 5m; level difference: 0m
- (2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m; level difference: 0m
- (3) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.
- (4) The dimensions do not include the control box.
- (5) Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
- (6) Maximum allowable voltage range variation between phases is 2%.
- (7) MCA/MFA: $MCA = 1.25 \times FLA$
- (8) $MFA \leq 4 \times FLA$
- (9) Next lower standard fuse rating minimum 15A
- (10) Select wire size based on the value of MCA
- (11) Instead of a fuse, use a circuit breaker
- (12) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 7.5m (horizontal)
- (13) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 7.5m (horizontal)
- (14) Use a circuit breaker instead of a fuse.

2 Safety device settings

2 - 1 Safety Device Settings

FXZQ-M9

Safety devices		FXZQ-M9					
		15	20	25	32	40	50
PC board fuse		250V 10A					
Fan motor thermal fuse	°C	-					
Fan motor thermal protector	°C	OFF: 130±5 ON: 83±20					

4TW31611-2

3 Options

3 - 1 Options

FXZQ-M9

OPTIONS

Item	Model	FXZQ15	FXZQ20	FXZQ25	FXZQ32	FXZQ40	FXZQ50
1	Decoration panel				BYFQ60B		
2	Sealing member of air discharge outlet				KDBH44BA60		
3	Panel spacer				KDBQ44B60		
4	Long-life filter				KAQ441BA60		
5	Fresh air intake kit		Direct installation type		KDDQ44XA60		

CONTROL SYSTEM

Item	Model	FXZQ15	FXZQ20	FXZQ25	FXZQ32	FXZQ40	FXZQ50
1	Remote control	Infrared	H/P		BRC7E530		
			C/O		BRC7E531		
	Wired	For Europe			BRC1D52		
					BRC1E51A7 (see note 4)		
2	Central remote control				DCS302C51		
2.1	Electrical box with earth terminal (3 blocks)				KJB311A		
3	Unified on/off controller		For Europe		DCS301B51		
3.1	Electrical box with earth terminal (2 blocks)				KJB212A		
3.2	Noise filter (for electromagnetic interphase use only)				KEK26-1A		
4	Schedule filter				DST301B51		
5	Adapter for wiring				KRP1B51 (see note 2)		
6.1	Wiring adapter for electrical appendices (1)		For Europe		KRP2A52 (see note 2)		
6.2	Wiring adapter for electrical appendices (2)				KRP4A53 (see note 2)		
7	Installation box for adapter PCB				KRP1BA101		
8	Remote sensor				KRCS01-1		
9	External control adapter		For Europe		DTA104A52		
10	Multi tenant (see note 3)				EKMTAC		

NOTES

1. All options are supplied as kit.
2. The 'installation box for adapter PCB' is required.
3. This kit contains parts to connect with 10 multi tenant indoor units.
4. Included languages are: English, German, French, Dutch, Spanish, Italian, Greek, Portuguese, Russian and Turkish.

3TW31619-2

4 Capacity tables

4 - 1 Cooling Capacity Tables

FXZQ-M9 - Cooling

Unit Size	Nominal Capacity	Outdoor °CDB	Indoor air temp.													
			14.0 WB		16.0 WB		18.0 WB		19.0 WB		20.0 WB		22.0 WB		24.0 WB	
			20.0 DB		23.0 DB		26.0 DB		27.0 DB		28.0 DB		30.0 DB		32.0 DB	
			TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
15	1.7	10.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.5	2.2	1.4
		12.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.5	2.2	1.4
		14.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.5	2.2	1.4
		16.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.5	2.1	1.4
		18.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.5	2.1	1.4
		20.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.5	2.1	1.4
		21.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.5	2.1	1.4
		23.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.4	2.0	1.3
		25.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	2.0	1.4	2.0	1.3
		27.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	1.9	1.4	2.0	1.3
		29.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	1.9	1.4	2.0	1.3
		31.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	1.9	1.4	1.9	1.3
		33.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.5	1.9	1.4	1.9	1.3
		35.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.4	1.8	1.3	1.9	1.2
		37.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.8	1.4	1.8	1.3	1.8	1.2
20	2.2	39.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.4	1.7	1.4	1.8	1.3	1.8	1.2
		10.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.6	2.9	1.7
		12.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.6	2.9	1.6
		14.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.6	2.8	1.6
		16.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.8	2.8	1.7
		18.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.8	2.7	1.7
		20.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.8	2.7	1.7
		21.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.8	2.7	1.6
		23.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.7	2.6	1.6
		25.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.6	1.7	2.6	1.6
		27.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.5	1.7	2.6	1.6
		29.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.5	1.7	2.5	1.6
		31.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.4	1.7	2.5	1.6
		33.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.4	1.6	2.5	1.5
		35.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.4	1.6	2.4	1.5
25	2.8	37.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.6	2.3	1.6	2.4	1.5
		39.0	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.2	1.6	2.3	1.6	2.3	1.5
		10.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.4	2.1	3.7	2.1
		12.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.4	2.1	3.6	2.1
		14.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.4	2.1	3.6	2.1
		16.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.4	2.1	3.5	2.0
		18.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.4	2.1	3.5	2.0
		20.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.4	2.1	3.4	2.0
		21.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.4	2.1	3.4	2.0
		23.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.3	2.1	3.4	1.9
		25.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.3	2.0	3.3	1.9
		27.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.2	2.0	3.3	1.9
		29.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.2	2.0	3.2	1.9
		31.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.1	2.0	3.2	1.9
		33.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.1	2.0	3.1	1.8
32	3.6	35.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	3.0	2.0	3.0	1.9	3.1	1.8
		37.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	2.9	2.0	3.0	1.9	3.0	1.8
		39.0	1.9	1.5	2.3	1.8	2.6	2.0	2.8	2.0	2.9	2.0	2.9	1.9	3.0	1.8
		10.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.3	2.5	4.7	2.6
		12.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.3	2.5	4.7	2.5
		14.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.3	2.5	4.6	2.5
		16.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.3	2.5	4.6	2.5
		18.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.3	2.5	4.5	2.5
		20.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.3	2.5	4.4	2.4
		21.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.3	2.5	4.4	2.4
		23.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.2	2.5	4.3	2.4
		25.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.2	2.5	4.3	2.4
		27.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.1	2.4	4.2	2.3
		29.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.1	2.4	4.2	2.3
		31.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	4.0	2.4	4.1	2.3
		33.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	3.9	2.4	4.0	2.3
		35.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.8	2.4	3.9	2.3	4.0	2.2
		37.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.7	2.4	3.8	2.3	3.9	2.2
		39.0	2.4	1.9	2.9	2.1	3.4	2.4	3.6	2.4	3.7	2.4	3.8	2.3	3.8	2.2

NOTES

TC: Total capacity: kW

SHC: Sensible heat capacity: kW

4 Capacity tables

4 - 1 Cooling Capacity Tables

FXZQ-M9 - Cooling

Unit Size	Nominal Capacity	Outdoor °CDB	Indoor air temp.													
			14.0 WB		16.0 WB		18.0 WB		19.0 WB		20.0 WB		22.0 WB		24.0 WB	
			20.0 DB		23.0 DB		26.0 DB		27.0 DB		28.0 DB		30.0 DB		32.0 DB	
			TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
40	4.5	10.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.4	3.4	5.9	3.5
		12.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.4	3.4	5.8	3.4
		14.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.4	3.4	5.8	3.4
		16.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.4	3.4	5.7	3.4
		18.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.4	3.4	5.6	3.3
		20.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.4	3.4	5.5	3.3
		21.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.4	3.4	5.5	3.3
		23.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.3	3.3	5.4	3.2
		25.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.2	3.3	5.3	3.2
		27.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.2	3.3	5.3	3.2
		29.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.1	3.2	5.2	3.1
		31.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	5.0	3.2	5.1	3.1
		33.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.8	3.3	4.9	3.2	5.0	3.1
		35.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.3	4.7	3.3	4.9	3.1	5.0	3.0
		37.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.2	4.7	3.2	4.8	3.1	4.9	3.0
50	5.6	39.0	3.0	2.5	3.6	2.9	4.2	3.2	4.5	3.2	4.6	3.2	4.7	3.1	4.8	3.0
		10.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	4.4	7.4	4.4
		12.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	4.4	7.3	4.4
		14.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	4.4	7.2	4.3
		16.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	4.4	7.1	4.3
		18.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	4.4	7.0	4.2
		20.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	4.4	6.9	4.2
		21.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	4.4	6.8	4.2
		23.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.6	4.3	6.7	4.1
		25.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.5	4.3	6.6	4.1
		27.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.4	4.2	6.6	4.0
		29.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.3	4.2	6.5	4.0
		31.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.2	4.1	6.4	4.0
		33.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.1	4.1	6.3	3.9
		35.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	5.9	4.2	6.0	4.0	6.2	3.9
		37.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	5.8	4.1	5.9	4.0	6.1	3.8
		39.0	3.8	3.1	4.5	3.6	5.2	4.0	5.6	4.1	5.7	4.1	5.8	3.9	6.0	3.8

3TW31612-1(2)

4 Capacity tables

4 - 2 Heating Capacity Tables

FXZQ-M9 - Heating									
Unit Size	Nominal Capacity	Outdoor air temp.		Indoor air temp.: °CDB					
				16.0	18.0	20.0	21.0	22.0	24.0
		°CDB	°CWB	kW	kW	kW	kW	kW	kW
15	1.9	-19.8	-20.0	1.1	1.1	1.1	1.1	1.1	1.1
		-18.8	-19.0	1.2	1.2	1.1	1.1	1.1	1.1
		-16.7	-17.0	1.2	1.2	1.2	1.2	1.2	1.2
		-14.7	-15.0	1.3	1.3	1.3	1.3	1.3	1.3
		-12.6	-13.0	1.4	1.4	1.4	1.3	1.3	1.3
		-10.5	-11.0	1.4	1.4	1.4	1.4	1.4	1.4
		-9.5	-10.0	1.5	1.5	1.5	1.4	1.4	1.4
		-8.5	-9.1	1.5	1.5	1.5	1.5	1.5	1.5
		-7.0	-7.6	1.5	1.5	1.5	1.5	1.5	1.5
		-5.0	-5.6	1.6	1.6	1.6	1.6	1.6	1.6
		-3.0	-3.7	1.7	1.7	1.7	1.7	1.7	1.7
		0.0	-0.7	1.8	1.8	1.8	1.8	1.8	1.7
		3.0	2.2	1.9	1.9	1.9	1.8	1.8	1.7
		5.0	4.1	1.9	1.9	1.9	1.8	1.8	1.7
		7.0	6.0	2.0	2.0	1.9	1.8	1.8	1.7
		9.0	7.9	2.1	2.0	1.9	1.8	1.8	1.7
		11.0	9.8	2.1	2.0	1.9	1.8	1.8	1.7
		13.0	11.8	2.1	2.0	1.9	1.8	1.8	1.7
		15.0	13.7	2.1	2.0	1.9	1.8	1.8	1.7
20	2.5	-19.8	-20.0	1.5	1.5	1.5	1.5	1.5	1.5
		-18.8	-19.0	1.5	1.5	1.5	1.5	1.5	1.5
		-16.7	-17.0	1.6	1.6	1.6	1.6	1.6	1.6
		-14.7	-15.0	1.7	1.7	1.7	1.7	1.7	1.7
		-12.6	-13.0	1.8	1.8	1.8	1.8	1.8	1.8
		-10.5	-11.0	1.9	1.9	1.9	1.9	1.9	1.9
		-9.5	-10.0	1.9	1.9	1.9	1.9	1.9	1.9
		-8.5	-9.1	2.0	2.0	1.9	1.9	1.9	1.9
		-7.0	-7.6	2.0	2.0	2.0	2.0	2.0	2.0
		-5.0	-5.6	2.1	2.1	2.1	2.1	2.1	2.1
		-3.0	-3.7	2.2	2.2	2.2	2.2	2.2	2.2
		0.0	-0.7	2.3	2.3	2.3	2.3	2.3	2.2
		3.0	2.2	2.5	2.5	2.4	2.4	2.3	2.2
		5.0	4.1	2.5	2.5	2.5	2.4	2.3	2.2
		7.0	6.0	2.6	2.6	2.5	2.4	2.3	2.2
		9.0	7.9	2.7	2.7	2.5	2.4	2.3	2.2
		11.0	9.8	2.8	2.7	2.5	2.4	2.3	2.2
		13.0	11.8	2.8	2.7	2.5	2.4	2.3	2.2
		15.0	13.7	2.8	2.7	2.5	2.4	2.3	2.2
25	3.2	-19.8	-20.0	1.9	1.9	1.9	1.9	1.9	1.9
		-18.8	-19.0	1.9	1.9	1.9	1.9	1.9	1.9
		-16.7	-17.0	2.1	2.1	2.0	2.0	2.0	2.0
		-14.7	-15.0	2.2	2.2	2.2	2.2	2.2	2.1
		-12.6	-13.0	2.3	2.3	2.3	2.3	2.3	2.3
		-10.5	-11.0	2.4	2.4	2.4	2.4	2.4	2.4
		-9.5	-10.0	2.5	2.4	2.4	2.4	2.4	2.4
		-8.5	-9.1	2.5	2.5	2.5	2.5	2.5	2.5
		-7.0	-7.6	2.6	2.6	2.6	2.6	2.6	2.6
		-5.0	-5.6	2.7	2.7	2.7	2.7	2.7	2.7
		-3.0	-3.7	2.8	2.8	2.8	2.8	2.8	2.8
		0.0	-0.7	3.0	3.0	3.0	3.0	3.0	2.8
		3.0	2.2	3.1	3.1	3.1	3.1	3.0	2.8
		5.0	4.1	3.3	3.2	3.2	3.1	3.0	2.8
		7.0	6.0	3.4	3.4	3.2	3.1	3.0	2.8
		9.0	7.9	3.5	3.4	3.2	3.1	3.0	2.8
		11.0	9.8	3.6	3.4	3.2	3.1	3.0	2.8
		13.0	11.8	3.6	3.4	3.2	3.1	3.0	2.8
		15.0	13.7	3.6	3.4	3.2	3.1	3.0	2.8
32	4.0	-19.8	-20.0	2.4	2.4	2.3	2.3	2.3	2.3
		-18.8	-19.0	2.4	2.4	2.4	2.4	2.4	2.4
		-16.7	-17.0	2.6	2.6	2.6	2.6	2.6	2.5
		-14.7	-15.0	2.7	2.7	2.7	2.7	2.7	2.7
		-12.6	-13.0	2.9	2.8	2.8	2.8	2.8	2.8
		-10.5	-11.0	3.0	3.0	3.0	3.0	3.0	3.0
		-9.5	-10.0	3.1	3.1	3.1	3.1	3.0	3.0
		-8.5	-9.1	3.1	3.1	3.1	3.1	3.1	3.1
		-7.0	-7.6	3.2	3.2	3.2	3.2	3.2	3.2
		-5.0	-5.6	3.4	3.4	3.4	3.4	3.4	3.4
		-3.0	-3.7	3.5	3.5	3.5	3.5	3.5	3.5
		0.0	-0.7	3.7	3.7	3.7	3.7	3.7	3.5
		3.0	2.2	3.9	3.9	3.9	3.9	3.7	3.5
		5.0	4.1	4.1	4.1	4.0	3.9	3.7	3.5
		7.0	6.0	4.2	4.2	4.0	3.9	3.7	3.5
		9.0	7.9	4.3	4.3	4.0	3.9	3.7	3.5
		11.0	9.8	4.5	4.3	4.0	3.9	3.7	3.5
		13.0	11.8	4.5	4.3	4.0	3.9	3.7	3.5
		15.0	13.7	4.5	4.3	4.0	3.9	3.7	3.5

3TW31612-2(1)

4 Capacity tables

4 - 2 Heating Capacity Tables

FXZQ-M9 - Heating

Unit Size	Nominal Capacity	Outdoor air temp.		Indoor air temp.: °CDB					
				16.0	18.0	20.0	21.0	22.0	24.0
		°CDB	°CWB	kW	kW	kW	kW	kW	kW
40	5.0	-19.8	-20.0	3.0	2.9	2.9	2.9	2.9	2.9
		-18.8	-19.0	3.0	3.0	3.0	3.0	3.0	3.0
		-16.7	-17.0	3.2	3.2	3.2	3.2	3.2	3.2
		-14.7	-15.0	3.4	3.4	3.4	3.4	3.4	3.4
		-12.6	-13.0	3.6	3.6	3.6	3.5	3.5	3.5
		-10.5	-11.0	3.7	3.7	3.7	3.7	3.7	3.7
		-9.5	-10.0	3.8	3.8	3.8	3.8	3.8	3.8
		-8.5	-9.1	3.9	3.9	3.9	3.9	3.9	3.9
		-7.0	-7.6	4.0	4.0	4.0	4.0	4.0	4.0
		-5.0	-5.6	4.2	4.2	4.2	4.2	4.2	4.2
		-3.0	-3.7	4.4	4.4	4.4	4.4	4.4	4.4
		0.0	-0.7	4.7	4.6	4.6	4.6	4.6	4.4
		3.0	2.2	4.9	4.9	4.9	4.8	4.7	4.4
		5.0	4.1	5.1	5.1	5.0	4.8	4.7	4.4
		7.0	6.0	5.2	5.2	5.0	4.8	4.7	4.4
		9.0	7.9	5.4	5.3	5.0	4.8	4.7	4.4
		11.0	9.8	5.6	5.3	5.0	4.8	4.7	4.4
		13.0	11.8	5.6	5.3	5.0	4.8	4.7	4.4
		15.0	13.7	5.6	5.3	5.0	4.8	4.7	4.4
50	6.3	-19.8	-20.0	3.7	3.7	3.7	3.7	3.7	3.7
		-18.8	-19.0	3.8	3.8	3.8	3.8	3.8	3.8
		-16.7	-17.0	4.1	4.0	4.0	4.0	4.0	4.0
		-14.7	-15.0	4.3	4.3	4.3	4.2	4.2	4.2
		-12.6	-13.0	4.5	4.5	4.5	4.5	4.5	4.5
		-10.5	-11.0	4.7	4.7	4.7	4.7	4.7	4.7
		-9.5	-10.0	4.8	4.8	4.8	4.8	4.8	4.8
		-8.5	-9.1	4.9	4.9	4.9	4.9	4.9	4.9
		-7.0	-7.6	5.1	5.1	5.1	5.1	5.1	5.1
		-5.0	-5.6	5.3	5.3	5.3	5.3	5.3	5.3
		-3.0	-3.7	5.5	5.5	5.5	5.5	5.5	5.5
		0.0	-0.7	5.9	5.9	5.8	5.8	5.8	5.5
		3.0	2.2	6.2	6.2	6.2	6.1	5.9	5.5
		5.0	4.1	6.4	6.4	6.3	6.1	5.9	5.5
		7.0	6.0	6.6	6.6	6.3	6.1	5.9	5.5
		9.0	7.9	6.8	6.7	6.3	6.1	5.9	5.5
		11.0	9.8	7.0	6.7	6.3	6.1	5.9	5.5
		13.0	11.8	7.1	6.7	6.3	6.1	5.9	5.5
		15.0	13.7	7.1	6.7	6.3	6.1	5.9	5.5

3TW31612-2(2)

4 Capacity tables

4 - 3 Capacity Correction Factor

FXZQ-M9

		Single module and 2 module systems (not applicable for 3 module systems)						
		20°CDB	23°CDB	26°CDB	27°CDB	28°CDB	30°CDB	32°CDB
		14°CWB	16°CWB	18°CWB	19°CWB	20°CWB	22°CWB	24°CWB
20	TC ratio	0,529	0,539	0,584	0,623	0,655	0,708	0,757
	SHF ratio	1,196	1,299	1,276	1,214	1,172	1,115	1,069
25	TC ratio	0,529	0,539	0,584	0,623	0,655	0,708	0,757
	SHF ratio	1,196	1,299	1,276	1,214	1,172	1,115	1,069
32	TC ratio	0,530	0,539	0,583	0,623	0,655	0,709	0,773
	SHF ratio	1,194	1,297	1,278	1,215	1,173	1,115	1,070
40	TC ratio	0,536	0,545	0,574	0,615	0,648	0,702	0,750
	SHF ratio	1,174	1,279	1,293	1,225	1,179	1,119	1,076
50	TC ratio	0,542	0,553	0,579	0,619	0,654	0,710	0,753
	SHF ratio	1,150	1,250	1,283	1,219	1,172	1,114	1,077

4TW27232-9

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - Примечания - NOTLAR

How to use this table - So verwenden Sie diese Tabelle - Πώς θα χρησιμοποιήσετε αυτό τον πίνακα - Cómo utilizar esta tabla - Utilisation de ce tableau - Come utilizzare questa tabella - Gebruik van deze tabel - Как пользоваться этой таблицей - Bu tablo nasıl kullanılmalı?:

Capacity : Total capacity for High sensible mode = Total capacity for normal capacity table X TC ratio.

Leistung: Gesamtleistung für hochfühlbaren Leistungsmodus = Gesamtleistung für normale Leistungstabelle x GL-Verhältnis.

Απόδοση: Συνολική απόδοση για τη λειτουργία υψηλής ευαισθησίας = Συνολική απόδοση για τον πίνακα κανονικών αποδόσεων X αναλογία TC

Capacidad: Capacidad total para el modo de alta sensibilidad = Capacidad total para la tabla de capacidad normal X relación TC.

Capacité sensible (FCS) (Facteur de chaleur sensible) – en anglais : SHF) : FCS pour le mode sensibilité élevée (« High ») = FCS du tableau des capacités normales x rapport FCS.

Capacità: Capacità totale per modalità ad alta capacità sensibile = Capacità totale per tabella capacità normali X rapporto TC.

Capaciteit: totale capaciteit in modus grote ("High") gevoeligheid = totale capaciteit uit de tabel met normale capaciteiten x TC-ratio.

Производительность: Общая производительность для режима с высоким коэфф. ошутимого охлаждения = Общая производительность для нормального режима, таблица X коэфф. TC.

Kapasite: Yüksek algı modu için toplam kapasite = Normal kapasite tablosundaki toplam kapasite değeri x TC oranı.

Sensible capacity (SHF): SHF for High sensible mode = SHF for normal capacity table X SHF ratio .

Fühlbare Leistung (SHF): SHF für hochfühlbaren Leistungsmodus = SHF für normale Leistungstabelle x SHF-Verhältnis.

Αισθητή απόδοση (SHF): SHF για λειτουργία υψηλής ευαισθησίας = SHF για πίνακα κανονικών αποδόσεων X αναλογία SHF .

Capacidad sensible (FCS): SHF para el modo de alta sensibilidad = SHF para la tabla de capacidad normal X relación SHF.

Capacité sensible (FCS) (Facteur de chaleur sensible) – en anglais : SHF) : FCS pour le mode sensibilité élevée (« High ») = FCS du tableau des capacités normales x rapport FCS.

Capacità sensibile (SHF): SHF per modalità ad alta capacità sensibile = SHF per tabella capacità normali X rapporto SHF.

Gevoeligheids capaciteit (WGF (warmtegevoelsfactor)– in het Engels "SHF"): WGF voor de modus grote ("High") gevoeligheid = WGF uit de tabel met normale capaciteiten x WGF-ratio.

Ощутимая производительность (SHF): SHF для режима с высоким коэфф. ошутимого охлаждения = SHF для нормального режима, таблица X коэфф. SHF. Algılanabilir kapasite (SHF): Yüksek algı modu için SHF = Normal kapasite tablosundaki SHF değeri x SHF oranı.

In case of SHF is bigger than 1 , SHF is "1"

Für den Fall, dass SHF größer als 1 ist, wird SHF als "1" angenommen.

Σε περίπτωση που το SHF είναι μεγαλύτερο από 1, το SHF είναι "1"

En caso de que SHF sea superior a 1 , SHF equivale a "1"

Si FCS est supérieur à 1, utilisez « 1 » pour FCS.

Qualora il valore SHF sia maggiore di 1 , SHF è "1"

Indien WGF groter is dan 1, neem dan "1" voor WGF.

Если SHF больше 1, то SHF равен "1"


SHF değeri 1'den büyükse, SHF değeri "1" kabul edilmelidir

5 Dimensional drawings


5 - 1 Dimensional Drawings

FXZQ-M9


Remote control dimensions

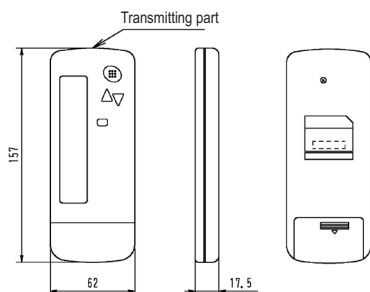


Remote control holder installation procedure



Receiver installation procedure

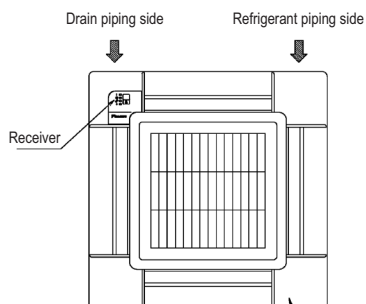


Receiver detail



Decoration panel
(BYFQ60BW1)
(BYFQ60B7W1)
(BYFQ60B8W1)

3D038937A

FXZQ-M9

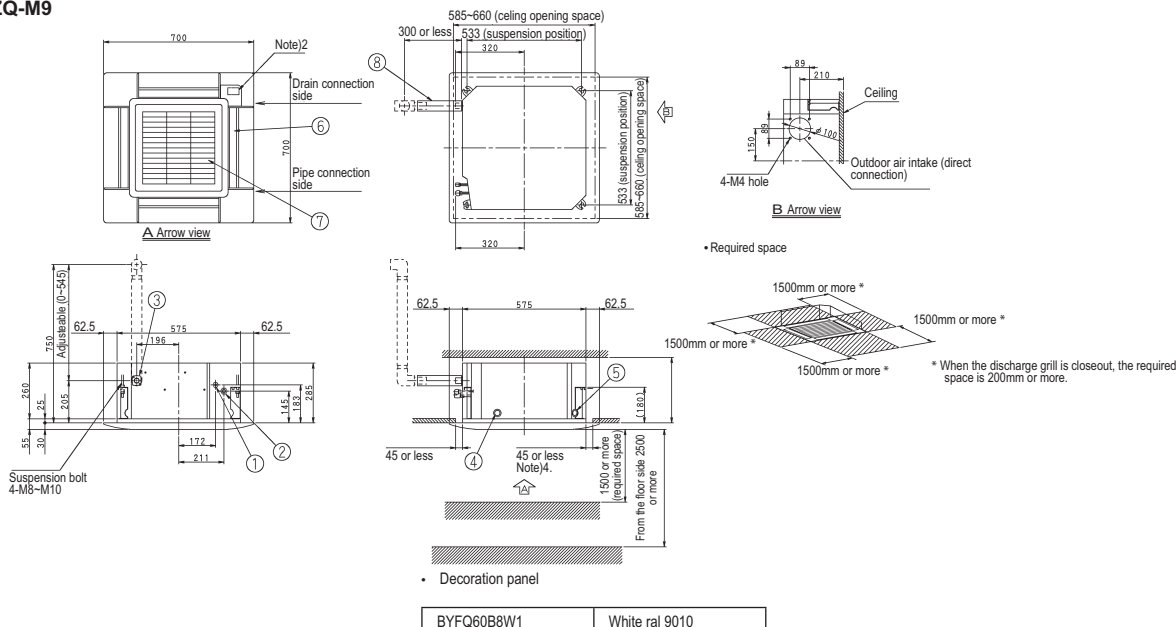

BYFQ60B8W1 White ral 9010

3D039005C

Item	Part name	Remark
1	Liquid pipe connection	Ø6.4 (flare connection)
2	Gas pipe connection	Ø12.7 (flare connection)
3	Drain pipe connection	VP20 (O.D. Ø26)
4	Power supply connection	
5	Remote control code and control wiring connection	
6	Air discharge grill	
7	Suction grille	
8	Drain hose (accessory)	I.D. Ø25 (outlet)


NOTES

1. Sticking location for manufacture's label
Manufacture's label for indoor unit: on the bell mouth inside suction grille
Manufacture's label for decoration panel: on the inner frame inside suction grille
2. In case of using infrared remote control, this position will be a signal receiver, refer to the drawing of infrared remote control in detail.
3. When the temperature and humidity in the ceiling exceed 30°C and RH 80% or the fresh air is inducted into the ceiling or the unit continues 24 hour operation, and additional insulation (thickness 100mm or more of glasswool or polyethylene) is required.
4. Though the installation is acceptable up to maximum of 660mm square ceiling opening, keep the clearance of 45mm or less between the main unit and the ceiling opening so that the panel overlap allowance can be ensured.

5 Dimensional drawings

5 - 1 Dimensional Drawings

FXZQ-M9

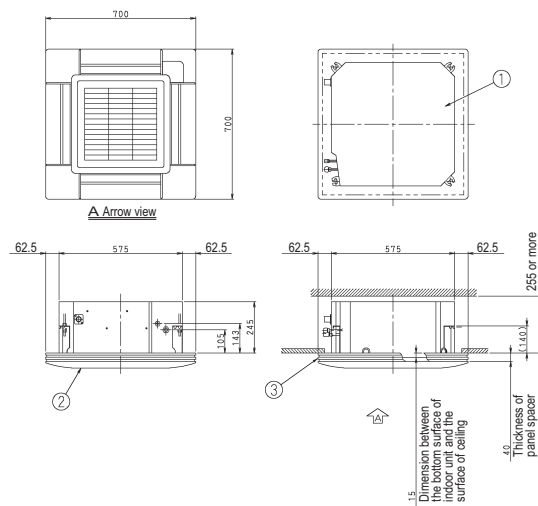


Item	Name	Remark
1	Indoor unit	
2	Decoration panel	
3	Panel spacer	

3D041038

6 Centre of gravity

6 - 1 Centre of Gravity


FXZQ-M9

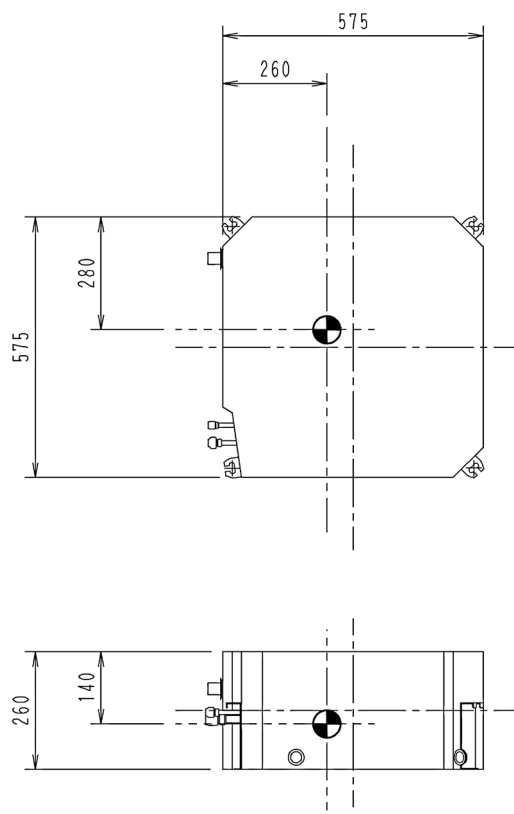

4D040158

7 Piping diagrams


7 - 1 Piping Diagrams

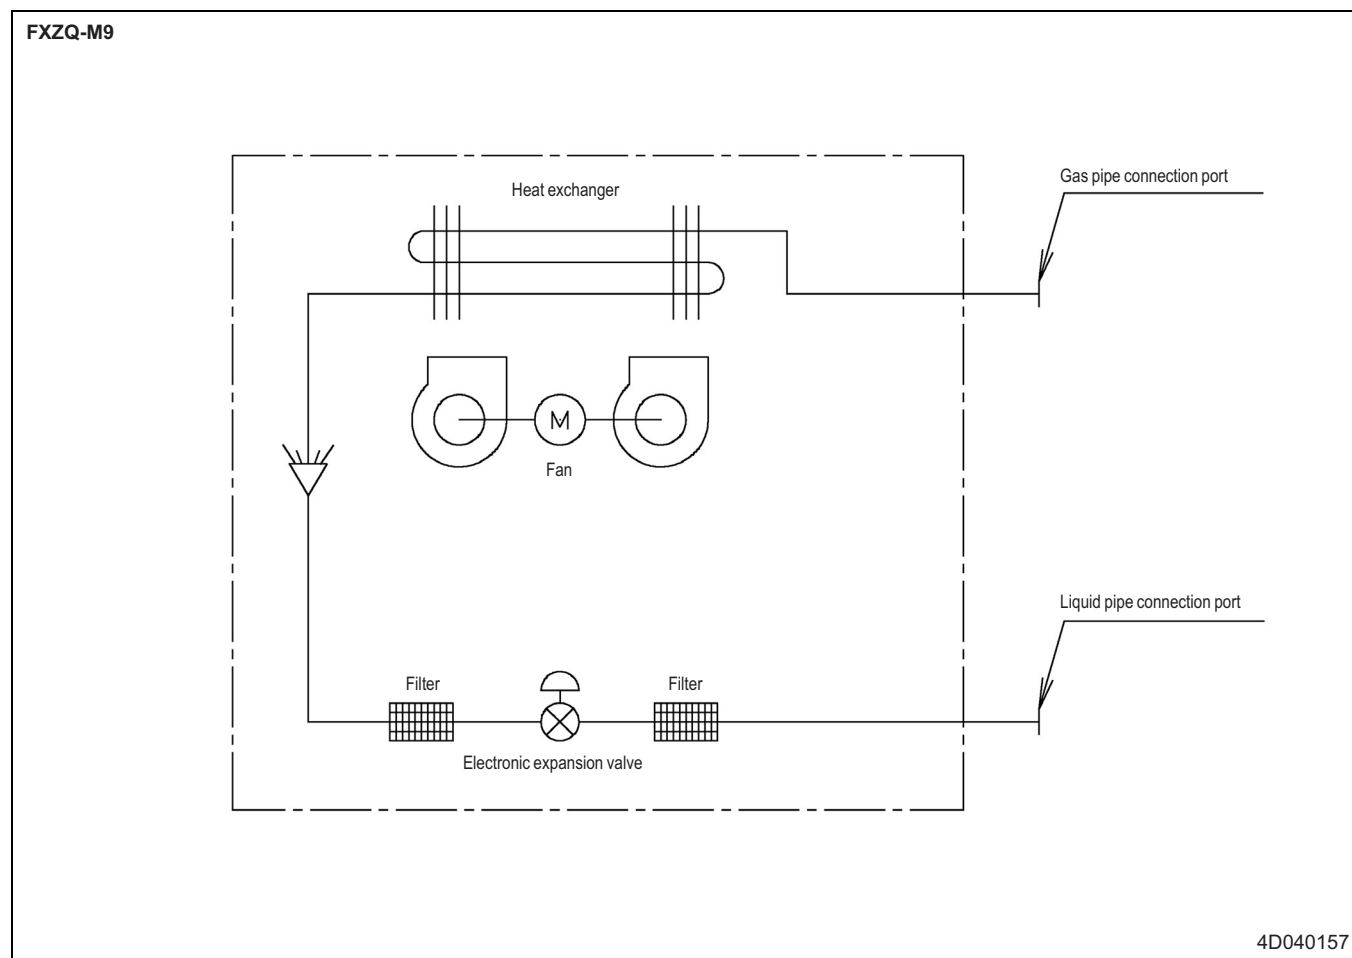

8 Wiring diagrams

8 - 1 Wiring Diagrams - Single Phase

FXZQ-M9

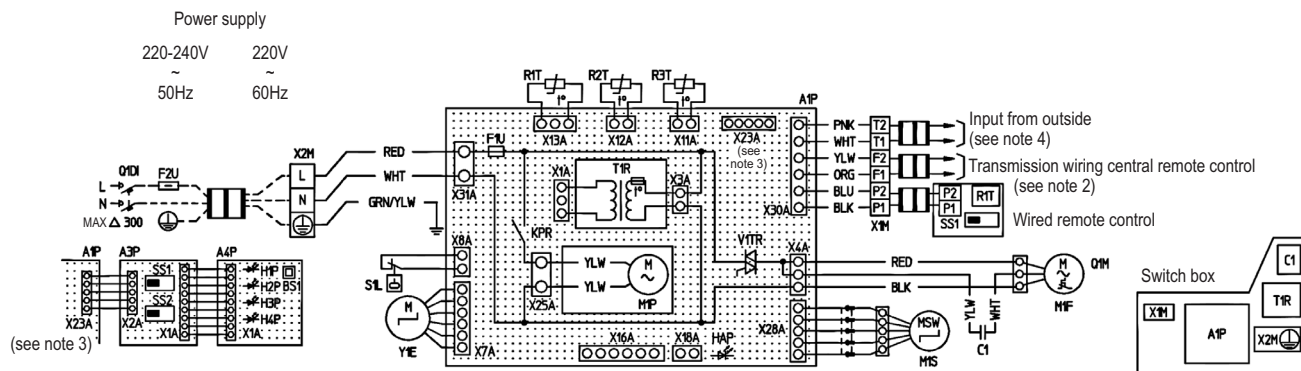

A1P	Printed circuit board	V1TR	Triac	H4P	Light emitting diode (defrost-orange)
C1	Capacitor (M1F)	X1M	Terminal strip	SS1	Selector switch (main/sub)
F1U	Fuse (®, 5A, 250V)	X2M	Terminal strip	SS2	Selector switch (wireless address set)
F2U	Field fuse	Y1E	Electronic expansion valve		
HAP	Light emitting diode (service monitor green)				Connector for optional parts
KPR	Magnetic relay (M1P)		Wired remote control	X16A	Connector (adapter for wire)
M1F	Motor (indoor fan)	R1T	Thermistor (air)	X18A	Connector (on/off) (wiring adapter for electrical appendices)
M1P	Motor (drain pump)	SS1	Selector switch (main/sub)		
M1S	Motor (swing flap)				
Q1D1	Field earth leak detector (max. 300 mA)		Infrared remote control (receiver/display unit)		
Q1M	Thermal protector (M1F embedded)	A3P	Printed circuit board		
R1T	Thermistor (air)	A4P	Printed circuit board		
R2T	Thermistor (coil, liquid)	BS1	Push button (on/off)		
R3T	Thermistor (coil, gas)	H1P	Light emitting diode (on-red)		
S1L	Float switch	H2P	Light emitting diode (timer-green)		
T1R	Transformer (220-240V/22V)	H3P	Light emitting diode (filter sign-red)		

PNK: pink	WHT: white
YLW: yellow	ORG: orange
BLU: blue	BLK: black
RED: red	BRN: brown

3TW33686-1


NOTES

- : terminal, □□□ : connector, -○- : wire clamp, -■- : field wiring
- When using the central remote control see manual for connection to the unit.
- X23A is connected when the infrared remote control kit is being used.
- When connecting the input wires from outside, forced off or on/off control operation can be selected by remote control. In details, refer to the installation manual attached to the unit.
- Remote control model varies according to the combination system. See technical data and catalogs, etc. before connecting.

9 Sound data

9 - 1 Sound Level Data

FXZQ-M9

Model	Sound pressure level			Sound power level
	H	L	Measuring location	
FXZQ20M9	30	25		47
FXZQ25M9	30	25		47
FXZQ32M9	32	26		49
FXZQ40M9	36	28		53
FXZQ50M9	41	33		58


NOTES

- 1 Measuring place: anechoic chamber
- 2 Operation noise differs with operation and ambient conditions
- 3 Operating conditions: Power source: 230V, 50 Hz
 - Cooling: Indoor air temperature: 27°CDB, 19°CWB
Outdoor air temperature: 35°CDB, 24°CWB
 - Heating: Indoor air temperature: 20°CDB, 15°CWB
Outdoor air temperature: 7°CDB, 6°CWB

9 Sound data

9 - 2 Sound Pressure Spectrum


FXZQ15M9

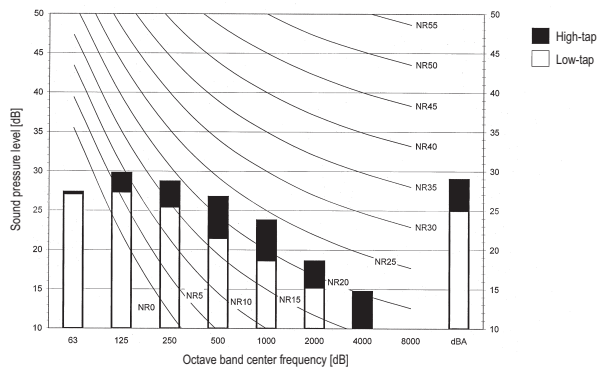

3TW31617-1


NOTES

1. Data is valid at free field condition
2. Data is valid at nominal operation condition
3. dBA = A-weighted sound pressure level (A-scale according to IEC)
4. Reference acoustic pressures 0dB = 20μPa




FXZQ20,25M9

4D040274A

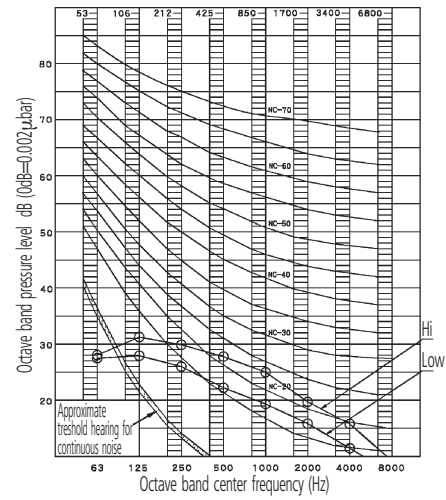


FXZQ32M9

4D040285A

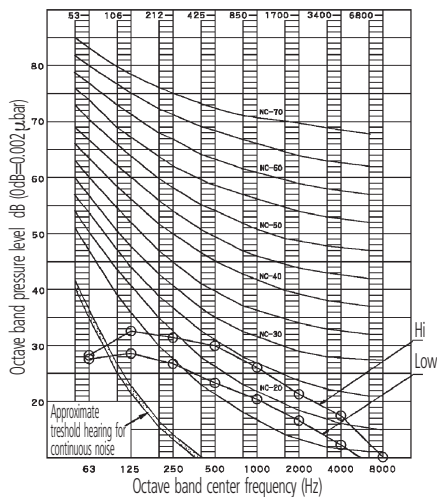


FXZQ40M9

4D040286A

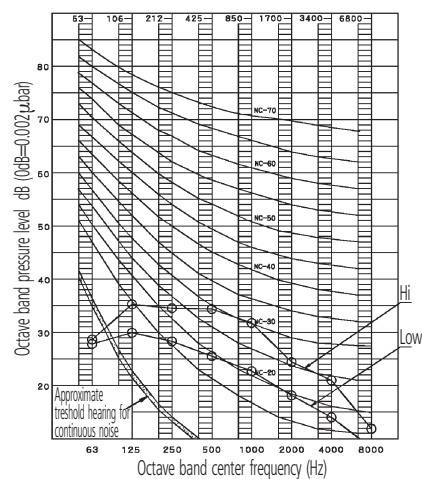

9 Sound data

9 - 2 Sound Pressure Spectrum

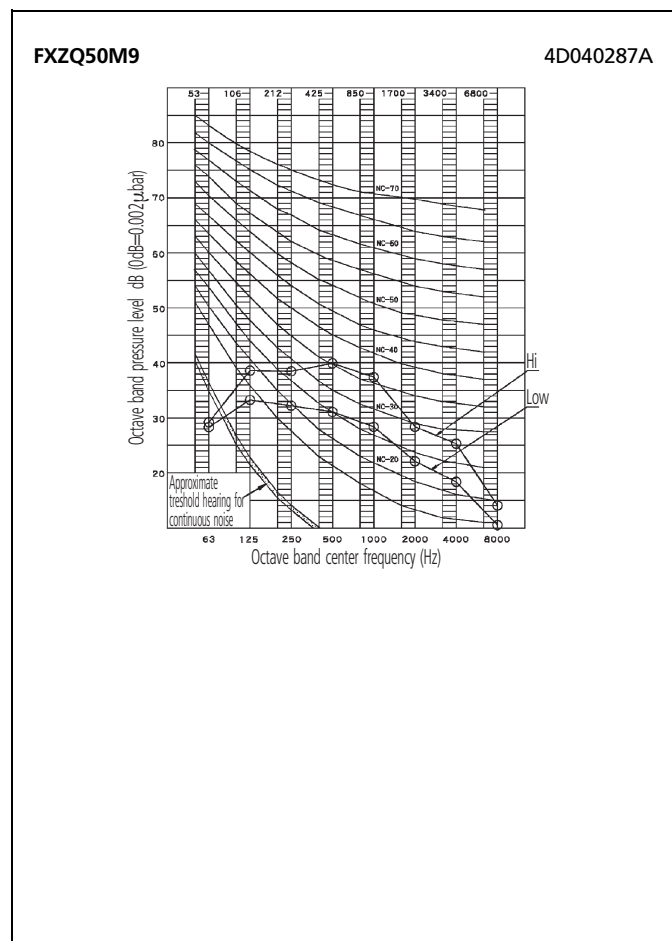


10 Air flow patterns

10 - 1 Air Flow Pattern - Cooling

FXZQ20,25M9


Cooling air velocity distribution

4-way discharge, air flow direction: horizontal

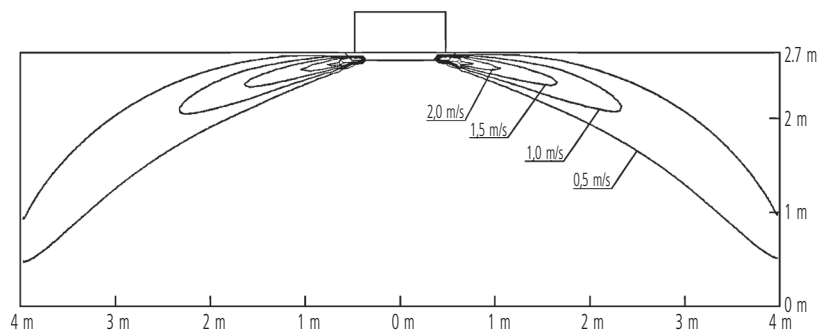

Cooling air temperature distribution

4-way discharge, air flow direction: horizontal

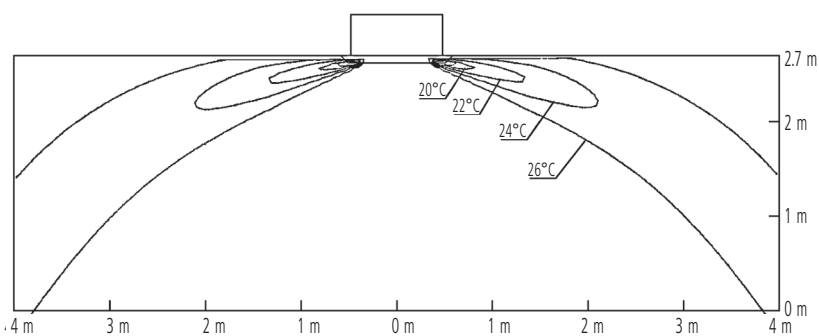


4D039738A

FXZQ32M9


Cooling air velocity distribution

4-way discharge, air flow direction: horizontal

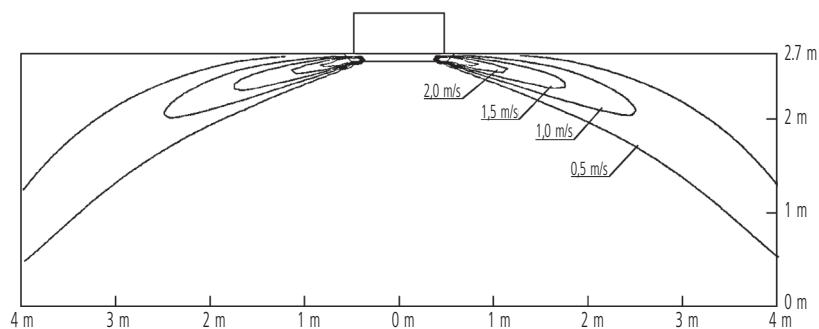

Cooling air temperature distribution

4-way discharge, air flow direction: horizontal

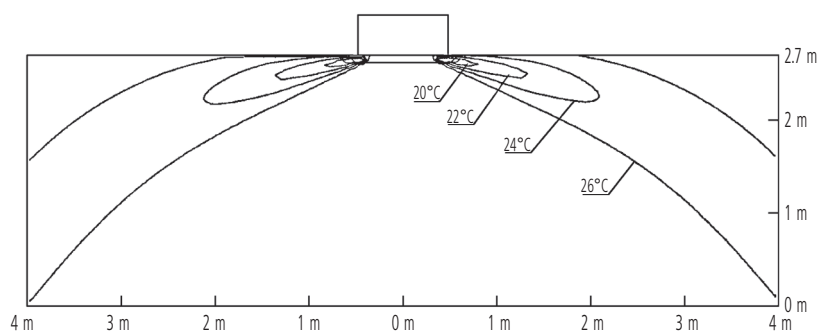

4D040188


10 Air flow patterns

10 - 1 Air Flow Pattern - Cooling

FXZQ40M9


Cooling air velocity distribution

4-way discharge, air flow direction: horizontal

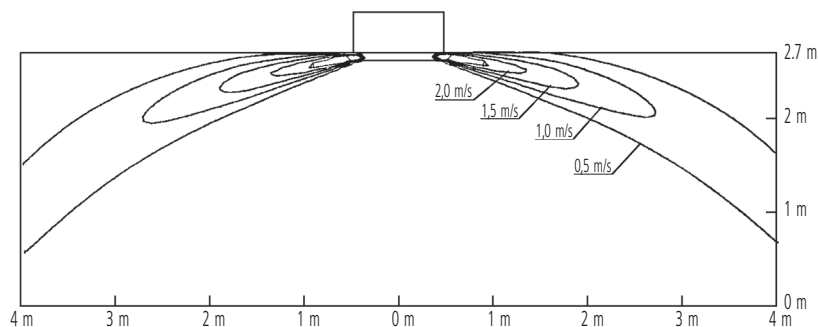

Cooling air temperature distribution

4-way discharge, air flow direction: horizontal

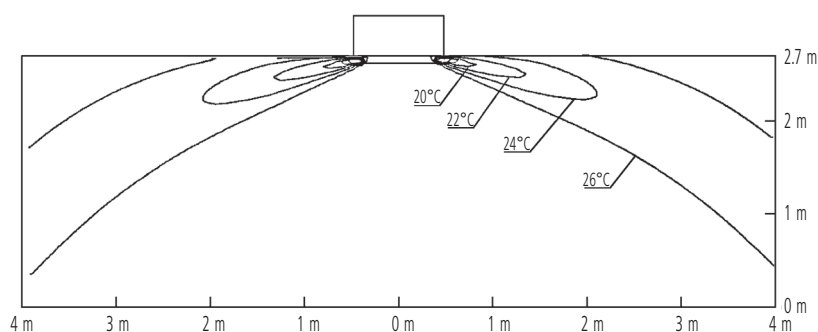


4D040189

FXZQ50M9


Cooling air velocity distribution

4-way discharge, air flow direction: horizontal

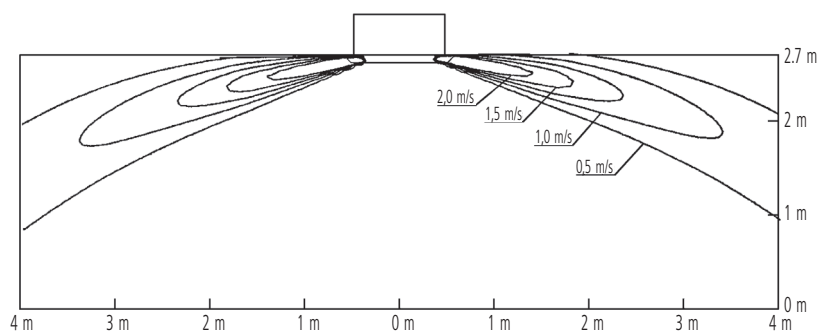

Cooling air temperature distribution

4-way discharge, air flow direction: horizontal

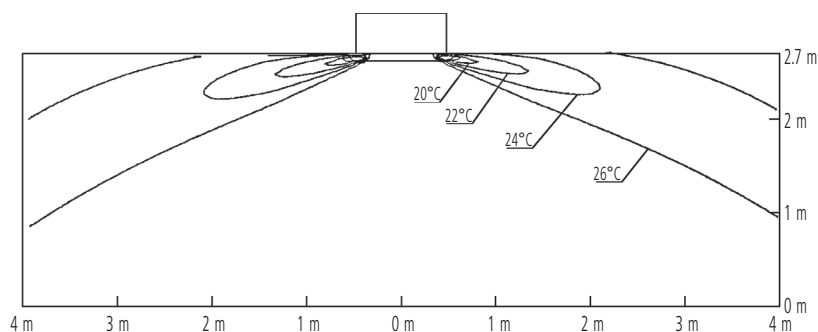

4D040190


10 Air flow patterns

10 - 2 Air Flow Pattern - Heating

FXZQ20,25M9


Heating air velocity distribution

4-way discharge, air flow direction: down

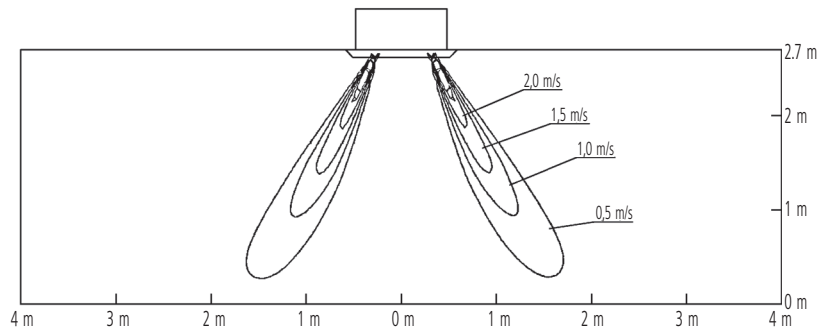

Heating air temperature distribution

4-way discharge, air flow direction: down

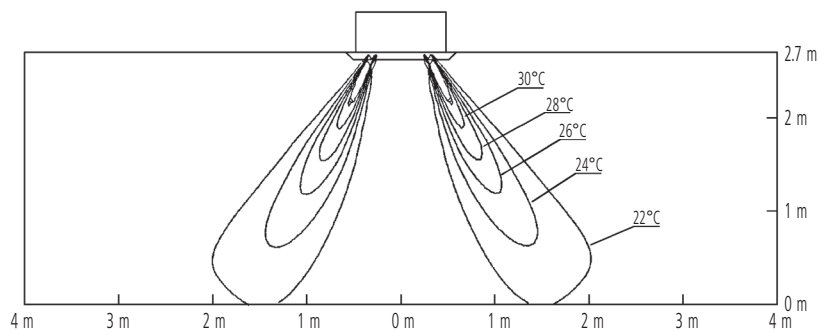


4D039820A

FXZQ32M9


Heating air velocity distribution

4-way discharge, air flow direction: down

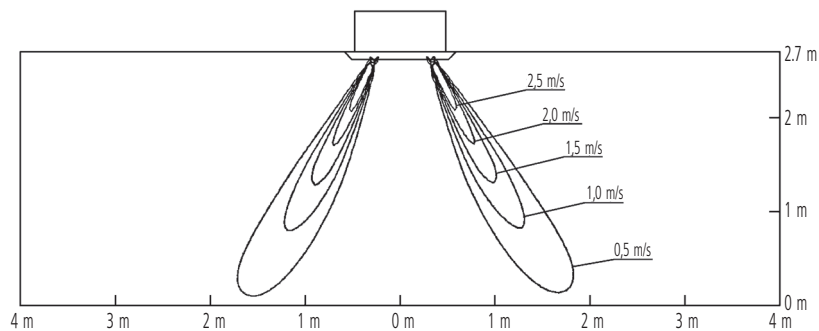

Heating air temperature distribution

4-way discharge, air flow direction: down

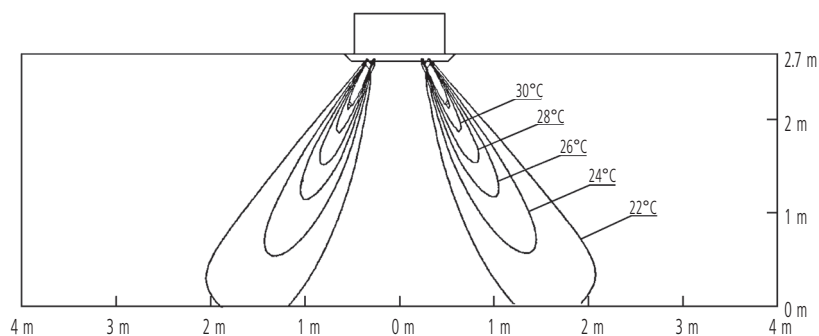

4D040191


10 Air flow patterns

10 - 2 Air Flow Pattern - Heating

FXZQ40M9


Heating air velocity distribution

4-way discharge, air flow direction: down

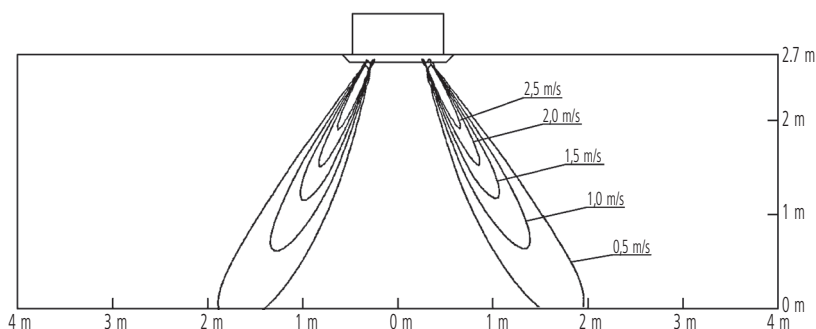

Heating air temperature distribution

4-way discharge, air flow direction: down

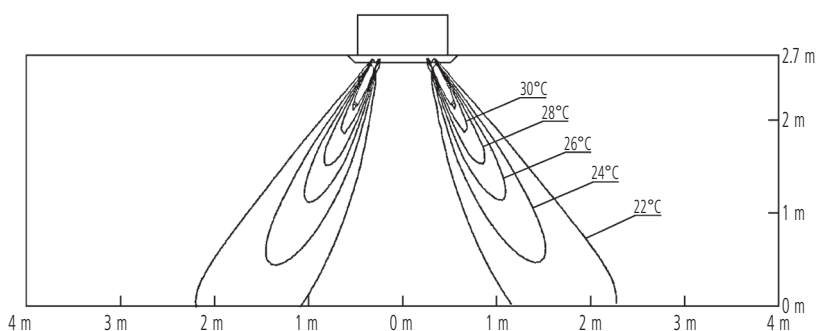


4D040192

FXZQ50M9


Heating air velocity distribution

4-way discharge, air flow direction: down

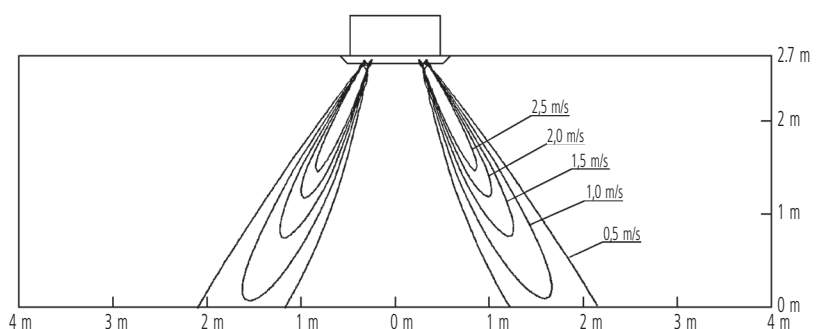

Heating air temperature distribution

4-way discharge, air flow direction: down

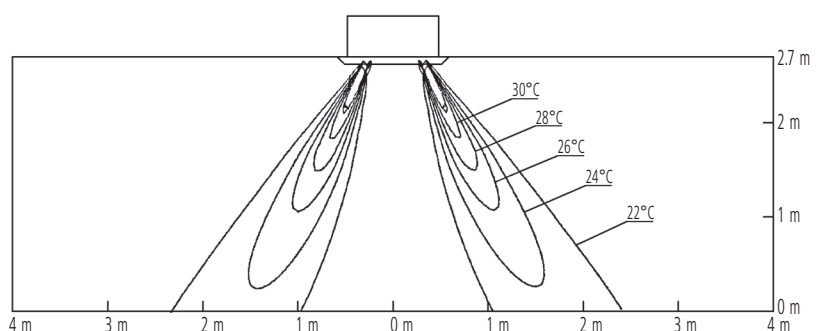

4D040193


11 Fan characteristics

11 - 1 Fan Characteristics

FXZQ15,20,25M9


Cooling air velocity distribution

4 way discharge, air flow direction: horizontal

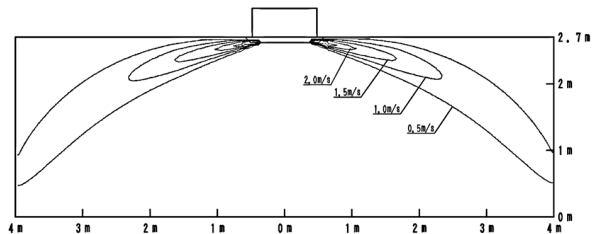

Cooling air temperature distribution

4 way discharge, air flow direction: horizontal

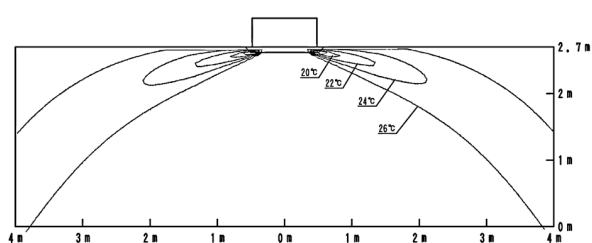


4D039738C

FXZQ15,20,25M9


Heating air velocity distribution

4 way discharge, air flow direction: down

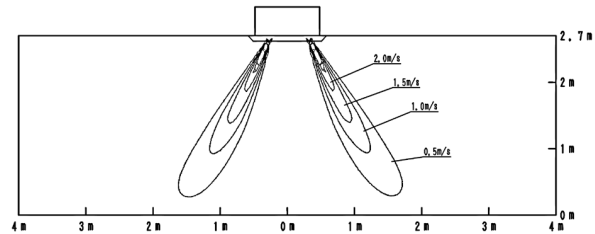

Heating air temperature distribution

4 way discharge, air flow direction: down

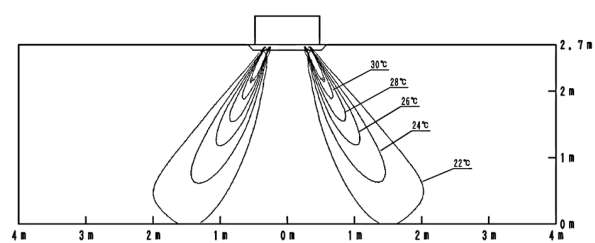

4D039820C



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



VRV® products are not within the scope of the Eurovent certification programme.

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Daikin products are distributed by: