



Air Conditioners

Technical Data

Rooftops



www.daikin.eu


UATYQ250-700BY1



Air Conditioners

Technical Data

Rooftops

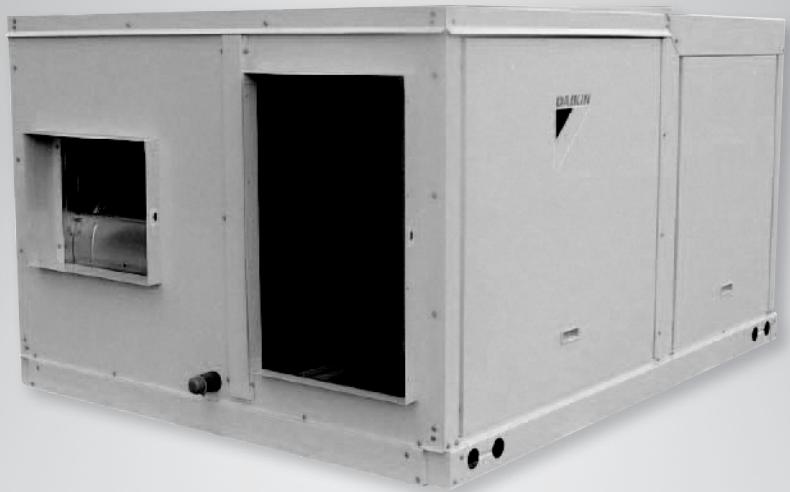

www.daikin.eu

UATYQ250-700BY1

TABLE OF CONTENTS

UATYQ-BY1

1	Specification text	2
2	Selection procedure.....	5
3	Specifications	11
4	Nomenclature	14
5	Safety device settings	15
6	Options	16
7	Capacity tables	17
	Capacity tables cooling	17
	Capacity tables heating	23
8	Dimensional drawing & centre of gravity	25
9	Piping diagram.....	27
10	Wiring diagram.....	28
11	Sound data.....	31
	Sound pressure spectrum	31
	Sound level data	34
12	Fan characteristics.....	35
13	Installation.....	37
	Roofcurb drawings	37
	Pulley	38
14	Operation range	40

1 Specification text

UATYQ-BY1

Features Write up

- 1. Package Unit:** Daikin's new range of rooftop packaged units has been developed specifically to suit commercial applications and are designed to be easy to install, requiring only ducting (and associated fittings), power/ control wiring and drain piping. Along with the light grey colour, the flat top and compact design gives an aesthetic and neat appearance when installed in line of sight. The unit cabinet is made of powder coated sheet metal especially suitable for outdoor use. All parts of the structure are fastened with corrosion resistant screws and bolts.
- 2. Base Beam:** The base beams are fixed and provide a rigid foundation for the entire unit. The beam has the forklift slots and rigging holes for better handling purpose. It is also designed to allow mounting on a roof curb, the dimension of the roof curb should be followed strictly in accordance with the installation manual.
- 3. Flexible Air Supply:** Since all the units utilize a belt/ pulley driven supply air fan, the units are able to meet a wide range of supply air volumes and external static pressures. Furthermore, the supply air fan motors, pulleys and belts (field supplied) can be easily changed on site to meet exact air flow and ESP requirement if required.
- 4. Convertible Return and Supply Air:** Unit can be easily converted from horizontal to vertical (downward) supply and return air duct configuration by relocating the panels and supply air fan mounting.
- 5. Scroll Compressor:** Units are equipped with high efficiency and reliable scroll compressors. Each compressor is mounted on rubber vibration isolators in order to reduce the noise level and vibration transmissions.
- 6. Powder Coated Condensate Drain Pan:** The sheet metal condensate drain pan is powder coated to resist corrosion.
- 7. Slots for 2 inches Return Air Filters:** A 2 inches rail is provided as standard in instances where a field supplied filter casement need to be installed.
- 8. Higher Energy Efficiency Rating:** The UATYQ series is designed in line with market requirement for better energy saving. Its' performance is claimed to be among the best in the market.

1 Specification text

UATYQ-BY1

Technical Write Up:

1. Compressor

Compressor used in UATYQ series Packaged Units are hermetically sealed scroll type. All the compressors are provided with an internal overload protection.

2. Condenser

Condenser coils are manufactured from seamless inner grooved copper tubes mechanically bonded to aluminium fins to ensure optimum heat transfer. All coils are tested against by Nitrogen holding at 609psig and highly precise Helium leak test at 235psig. ALL standard coils are up to 3 rows / 14-16 FPI, 3/8" (9.52mm) O.D. tubes. Hydrophilic Gold Fin coating (NA549) is offered as standard, which has longer life span under corrosive environment.

3. Evaporator

Evaporator coils are manufactured from seamless inner grooved copper tubes mechanically bonded to aluminium fins to ensure optimum heat transfer. All coils are tested against by Nitrogen holding at 609psig and highly precise Helium leak test at 235psig. ALL standard coils are 3-4 rows / 14-16 FPI, 3/8" (9.52mm) O.D. tubes. Hydrophilic Gold Fin coating (NA549) is offered as standard, which has longer life span under corrosive environment.

4. Condenser Fan and Motor

Fans are of propeller type, direct driven by weatherproof electrical induction motors. Condenser fan motor has class F insulation and splash-proof enclosure, IP44.

5. Evaporator Fan and Drive

Blower is DWDI centrifugal, forward curved type. It is mechanically and dynamically balanced and being mounted on a rigid shaft in a self aligned bearing block. The motor is fitted with an adjustable V-belt drive, as standard. It has class B insulation and dripping water proof, IP22.

6. Refrigerant Circuit

Each refrigerant circuit shall have independent electronic expansion devices, HP/LP switch and refrigerant line service pressure ports as standard factory installed.

7. Expansion device:

Electronic Expansion Valve is being used to ensure accurate control of refrigerant flow.

8. Casing/ Structure

The unit casing used in UATYQ series is made of zinc coated galvanized steel sheets. It is further coated with an electrostatic powder coat and then oven-baked for a tough and lasting weather resistant finish. Zinc plated screws are used throughout to further reduce possibility of unit rusting.

1 Specification text

UATYQ-BY1

9. Insulation

ALL possible areas of condensation to happen are insulated by PE, Polyethelene. Panel insulation is 10mm thickness while drain pan insulation is 5mm thickness.

10. Control

Units shall be completely factory supplied with an integrated controlled Module, with built in resident control algorithms to make decide heating, cooling, or ventilating operations in response to electronic signals from indoor & outdoor temperature sensors.

11. Rooftop Panel - handset

Rooftop Panel comprises all starting, operating and safety controls setting. It is connected to the IC module PCB and supplied as standard.

12. Optional Features

I. 3rd Party Thermostat

For application that requires uniform thermostat outlook with other electrical appliances. 3rd Party thermostat can be connected to the factory supplied module via the contact point available on PCB board.

II. Basic BMS Connection

Unit's standard PCB board provides dry contact for basic BMS connection. Input signal will go to dry contact ON/OFF, COOL/HEAT, and 4 to 20 mA temperature adjuster while output signal will come from ON/OFF, COOL/HEAT, ALARM and DEFROST dry contact.

III. Higher Level BMS Connection

Connection to higher level BMS is possible via Daikin compatible interface, DEC101/102A55.

IV. Economizer

Field installed economizer is supplied from factory as an accessory. It is also designed to cater for horizontal or vertical down throw air discharge orientation.

V. CO₂ Sensor

Field specified CO₂ sensor can be easily plug on the control board's dry contact, which is come as standard.

2 Selection procedure

Calculation Steps

Interpolation method can be used to get the total capacity, TC and sensible capacity, SC and power input, PI at those temperatures which are not stated out in the table. Extrapolation method are not allowed to be used to get the TC, SC and PI.

Example:

Model: UATYQ450BY1

Indoor Condition: 25°C DB, 17°C WB

Outdoor Condition: 37°C DB

Fan Speed: High (5650CFM)

Solution:

Overall

Based on the Performance Table

1. Refer to the Indoor DB column,

- **25°C** is located between 24°C and 27°C for 16°CWB (Thus, Interpolation need to be applied)
- **25°C** is located between 24°C and 27°C for 19°CWB (Thus, Interpolation need to be applied)

2. Refer to the Indoor WB column,

- **17°C** is located between 16°CWB and 19°CWB for 25°CDB
(Thus, Interpolation need to be applied)

3. Refer to the Outdoor DB column,

- **37°C** is located between 35°C and 40°C. (Thus, Interpolation need to be applied)

Please follow the steps below in order to get the required capacity.

1st Step Interpolation of Indoor DB

Find TC, SC, PI for

- (a) Indoor: **25°C DB**, 16°C WB
Outdoor: 35°C DB
- (b) Indoor: **25°C DB**, 19°C WB
Outdoor: 35°C DB
- (c) Indoor: **25°C DB**, 16°C WB
Outdoor: 40°C DB
- (d) Indoor: **25°C DB**, 19°C WB
Outdoor: 40°C DB

2nd Step Interpolation of Indoor WB

Find TC, SC, PI for

- (a) Indoor: **25°C DB**, 17°C WB
Outdoor: 35°C DB
- (b) Indoor: **25°C DB**, 17°C WB
Outdoor: 40°C DB

3rd Step Interpolation of Outdoor DB

Find TC, SC, PI for

- (a) Indoor: 25°C DB, 17°C WB
Outdoor: **37°C DB**

2 Selection procedure

Details:

1st Step:

To obtain the Total capacity and Sensible capacity and Power input for

(a) Indoor Condition: 25°C DB, 16°C WB

Outdoor Condition: 35°C DB

Indoor WB °C	Indoor DB °C	Outdoor DB, °C			PI (kW)	
		35				
		TC (kW)	SHC (kW)	PI (kW)		
16						
	24	41.41	35.59	12.81		
	25	X ₁	Y ₁	Z ₁		
	27	43.48	41.63	12.94		

Total capacity, TC

Interpolation Method:

$$\Rightarrow \frac{27^\circ C - 24^\circ C}{27^\circ C - 25^\circ C} = \frac{43.48\text{kW} - 41.41\text{kW}}{43.48\text{kW} - x_1\text{kW}}$$

$$\Rightarrow x_1 = 42.10\text{kW}$$

Sensible capacity, SHC

Interpolation Method:

$$\Rightarrow \frac{27^\circ C - 24^\circ C}{27^\circ C - 25^\circ C} = \frac{41.63\text{kW} - 35.59\text{kW}}{43.48\text{kW} - x_1\text{kW}}$$

$$\Rightarrow y_1 = 37.60\text{kW}$$

Power Input, PI

Interpolation Method:

$$\Rightarrow \frac{27^\circ C - 24^\circ C}{27^\circ C - 25^\circ C} = \frac{12.94\text{kW} - 12.81\text{kW}}{12.94\text{kW} - z_1\text{kW}}$$

$$\Rightarrow z_1 = 12.85\text{kW}$$

2 Selection procedure

(b) Indoor Condition: 25°C DB, 16°C WB

Outdoor Condition: 40°C DB

Indoor WB °C	Indoor DB °C	Outdoor DB, °C		
		40		
		TC (kW)	SHC (kW)	PI (kW)
16				
	24	38.59	33.52	13.91
	25	X ₂	Y ₂	Z ₂
	27	40.74	39.20	14.06

Total capacity, TC

Interpolation Method:

$$\Rightarrow \frac{27^\circ C - 24^\circ C}{27^\circ C - 25^\circ C} = \frac{43.48\text{kW} - 41.41\text{kW}}{40.74\text{kW} - x_2\text{kW}}$$

$$\Rightarrow x_2 = 39.31\text{kW}$$

Sensible capacity, SHC

Interpolation Method:

$$\Rightarrow \frac{27^\circ C - 24^\circ C}{27^\circ C - 25^\circ C} = \frac{39.20\text{kW} - 33.52\text{kW}}{39.20\text{kW} - y_2\text{kW}}$$

$$\Rightarrow y_2 = 35.41\text{kW}$$

Power Input, PI

Interpolation Method:

$$\Rightarrow \frac{27^\circ C - 24^\circ C}{27^\circ C - 25^\circ C} = \frac{14.06\text{kW} - 13.91\text{kW}}{14.06\text{kW} - z_2\text{kW}}$$

$$\Rightarrow z_2 = 13.96\text{kW}$$

* Repeat process (a) and (b) in 1st step for the condition below:

(c) Indoor Condition: 25°C DB, 19°C WB

Outdoor Condition: 35°C DB

$$\Rightarrow x_3 = 44.55\text{kW}$$

$$\Rightarrow y_3 = 31.63\text{kW}$$

$$\Rightarrow z_3 = 13.03\text{kW}$$

(c) Indoor Condition: 25°C DB, 19°C WB

Outdoor Condition: 40°C DB

$$\Rightarrow x_4 = 41.46\text{kW}$$

$$\Rightarrow y_4 = 31.63\text{kW}$$

$$\Rightarrow z_4 = 14.13\text{kW}$$

2 Selection procedure

2nd Step:

To obtain the Total capacity, Sensible capacity and Power Input for

(a) Indoor Condition: 25°C DB, 17°C WB

Outdoor Condition: 35°C DB

Indoor WB °C	Indoor DB °C	Outdoor DB, °C		
		35		
		TC (kW)	SHC (kW)	PI (kW)
16		42.10	37.60	12.85
17	25	X ₅	Y ₅	Z ₅
19		44.55	31.63	13.03

Total capacity, TC

Interpolation Method:

$$\Rightarrow \frac{19^{\circ}\text{C} - 16^{\circ}\text{C}}{19^{\circ}\text{C} - 17^{\circ}\text{C}} = \frac{44.55\text{kW} - 42.10\text{kW}}{44.55\text{kW} - x_5\text{kW}}$$

$$\Rightarrow x_5 = 42.92\text{kW}$$

Sensible capacity, SHC

Interpolation Method:

$$\Rightarrow \frac{19^{\circ}\text{C} - 16^{\circ}\text{C}}{19^{\circ}\text{C} - 17^{\circ}\text{C}} = \frac{31.63\text{kW} - 37.60\text{kW}}{31.63\text{kW} - y_5\text{kW}}$$

$$\Rightarrow y_5 = 35.61\text{kW}$$

Power Input, PI

Interpolation Method:

$$\Rightarrow \frac{19^{\circ}\text{C} - 16^{\circ}\text{C}}{19^{\circ}\text{C} - 17^{\circ}\text{C}} = \frac{13.03\text{kW} - 12.85\text{kW}}{13.03\text{kW} - z_5\text{kW}}$$

$$\Rightarrow z_5 = 12.91\text{kW}$$

2 Selection procedure

(b) Indoor Condition: 25°C DB, 17°C WB

Outdoor Condition: 40°C DB

Indoor WB °C	Indoor DB °C	Outdoor DB, °C		
		40		
		TC (kW)	SHC (kW)	PI (kW)
		⋮	⋮	
16		39.31	35.41	13.96
17	25	X ₆	Y ₆	Z ₆
19		41.46	29.99	14.13

Total capacity, TC

Interpolation Method:

$$\Rightarrow \frac{19^\circ\text{C} - 16^\circ\text{C}}{19^\circ\text{C} - 17^\circ\text{C}} = \frac{41.46\text{kW} - 39.31\text{kW}}{41.46\text{kW} - x_6\text{kW}}$$

$$\Rightarrow x_6 = 40.03\text{kW}$$

Sensible capacity, SHC

Interpolation Method:

$$\Rightarrow \frac{19^\circ\text{C} - 16^\circ\text{C}}{19^\circ\text{C} - 17^\circ\text{C}} = \frac{29.99\text{kW} - 35.41\text{kW}}{29.99\text{kW} - y_6\text{kW}}$$

$$\Rightarrow y_6 = 33.60\text{kW}$$

Power Input, PI

Interpolation Method:

$$\Rightarrow \frac{19^\circ\text{C} - 16^\circ\text{C}}{19^\circ\text{C} - 17^\circ\text{C}} = \frac{14.13\text{kW} - 13.96\text{kW}}{14.13\text{kW} - z_6\text{kW}}$$

$$\Rightarrow z_6 = 14.02\text{kW}$$

2 Selection procedure

3rd Step:

To obtain the Total capacity and Sensible capacity for

(a) Indoor Condition: 25°C DB, 17°C WB

Outdoor Condition: 37°C DB

Indoor WB °C	Indoor DB °C	Outdoor DB, °C									
		35			35			40			
		TC (kW)	SHC (kW)	PI (kW)	TC (kW)	SHC (kW)	PI (kW)	TC (kW)	SHC (kW)	PI (kW)	
25	17	42.92	35.61	12.91	x	y	z	40.03	33.60	14.02

Total capacity, TC

Interpolation Method:

$$\Rightarrow \frac{40^\circ C - 35^\circ C}{40^\circ C - 37^\circ C} = \frac{40.03\text{kW} - 42.92\text{kW}}{40.03\text{kW} - x\text{kW}}$$

$$\Rightarrow x = 41.76\text{kW}$$

Sensible capacity, SHC

Interpolation Method:

$$\Rightarrow \frac{40^\circ C - 35^\circ C}{40^\circ C - 37^\circ C} = \frac{33.60\text{kW} - 35.61\text{kW}}{33.60\text{kW} - y\text{kW}}$$

$$\Rightarrow y = 34.81\text{kW}$$

Power Input, PI

Interpolation Method:

$$\Rightarrow \frac{40^\circ C - 35^\circ C}{40^\circ C - 37^\circ C} = \frac{14.02\text{kW} - 12.91\text{kW}}{14.02\text{kW} - z\text{kW}}$$

$$\Rightarrow z = 13.35\text{kW}$$

3 Specifications

3-1 General data - Heat pump		UATYQ250BY1	UATYQ350BY1	UATYQ450BY1	UATYQ550BY1	UATYQ600BY1	UATYQ700BY1							
Nominal cooling capacity (Gross)	Btu/h	93300	121400	152600	190000	228000	247700							
	W	27340	35580	44720	55690	66820	72600							
Nominal heating capacity (Nett)	Btu/h	85000	118700	142600	184000	210500	237500							
	W	24910	34790	41790	53930	61690	69610							
Nominal total input power (Cooling)	W	8140	10780	13040	16740	19650	21610							
Nominal total input power (Heating)	W	7330	10840	12860	15540	18580	21420							
Nominal running current (Cooling)	W	16.6	21.2	28.3	30.2	33.8	39.0							
Nominal running current (Heating)	W	14.8	20.8	26.9	28.8	32.3	40.2							
Power source	V/Ph/Hz	380 ~ 415 / 3 / 50												
Refrigerant type / control		R410A / EXV												
EER (Gross)	W/W	3.36	3.30	3.43	3.33	3.40	3.36							
COP (Net)	W/W	3.40	3.21	3.25	3.47	3.32	3.25							
Evaporator	Sound power level @ 100 ESP	dBA	68	72	75	82	84	87						
	Sound power level @ Std ESP	dBA	73	76	80	84	84	90						
	Control	Air discharge	Ducted											
		Operation	Wired											
	Air flow	l/s / cfm	1560 / 3300	2030 / 4300	2670 / 5650	3160 / 6700	3445 / 7300	3917 / 8300						
	External static pressure	Pa/in.wg.	147 / 0.6	147 / 0.6	147 / 0.6	206 / 0.8	196 / 0.8	206 / 0.8						
	Condensate drain size	mm/in	25.4 / 1	24.4 / 1.0	25.4 / 1	25.4 / 1.0	25.4 / 1	25.4 / 1						
	Air flow	l/s / cfm	3884 / 8230	5664 / 12000	5710 / 1210	6090 / 12900	9534 / 20200	10006 / 21200						
Condensor	Sound power level	dBA	82	83	83	87	90	90						
	Unit dimension	Height	mm/in	1150 / 45.3	1028 / 40.5	1130 / 44.5	1048 / 41.3	1302 / 51.3	1454 / 57.2					
		Width	mm/in	1638 / 64.5	2209 / 87.0	2209 / 87.0	2209 / 87.0	2209 / 87.0	2209 / 87.0					
		Depth	mm/in	2063 / 53.0	2113 / 83.2	2113 / 83.2	2670 / 105.1	2670 / 105.1	2670 / 105.1					
	Packing dimension	Height	mm/in	1345 / 53.0	1223 / 48.1	1325 / 52.2	1252 / 49.3	1506 / 59.3	1674 / 65.9					
		Width	mm/in	2321 / 91.4	2372 / 93.4	2304 / 90.7	2304 / 90.7	2304 / 90.7	2304 / 90.7					
		Depth	mm/in	1758 / 69.2	2304 / 90.7	2372 / 93.4	2929 / 115.3	2929 / 115.3	2929 / 115.3					
	Unit weight (Net)	kg/lb	490 / 1080	660 / 1455	610 / 1345	780 / 1720	830 / 1830	970 / 2139						
	Refrigerant charge	kg/lb	6.1 / 13.4	(5.8 x 2) / (12.8 x 2)	(7.2 x 2) / (15.9 x 2)	(8.7 x 2) / (19.2 x 2)	(10.4 x 2) / (22.9 x 2)	(11.6 x 2) / (25.6 x 2)						
	Notes	All specifications are subjected to change by the manufacturer without prior notice.												
All units are being tested and comply to ISO 5151.														
Nominal cooling and heating capacity are based on the conditions below: a) Cooling - 27°C DB / 19°C WB indoor and 35°C DB / 24°C WB outdoor. b) Heating- 20°C DB indoor and 7°C DB / 6°C WB outdoor.														
Sound pressure levels are measured according to JIS standard.								Sound pressure levels are measured according to JIS B 8616 standard						
EER/COP calculation is based on effective power input as per ISO 5151.								All performance calculations are strictly following eurovent standard.						

3 Specifications


3-2 Components data - Heat pump			UATYQ250BY1	UATYQ350BY1	UATYQ450BY1	UATYQ550BY1	UATYQ600BY1	UATYQ700BY1		
Evaporator fan	Type		Centrifugal forward curve							
	Quantity		1							
	Material		Galvanised steel							
	Drive		Belt drive							
	Diameter	mm/in	381 / 15	381 / 15	381 / 15	400 / 15.7	400 / 15.7	400 / 15.7		
	Length	mm/in	381 / 15	381 / 15	381 / 15	400 / 15.7	400 / 15.7	400 / 15.7		
Evaporator fan motor	Type		Induction motor							
	Quantity		1							
	Index of protection (IP)		IP22							
Condenser fan1	Type		Propeller							
	Quantity		1							
	Material		Plastic							
	Drive		Direct drive							
	Diameter	mm/in	610 / 24.0	681 / 26.8	681 / 26.8	681 / 26.8	800 / 31.5	800 / 31.5		
Condenser fan2	Type		Propeller							
	Quantity		1							
	Material		Plastic							
	Drive		Direct drive							
	Diameter	mm/in	681 / 26.8			800 / 31.5	800 / 31.5	800 / 31.5		
Condenser fan motor 1	Type		Induction motor							
	Quantity		1							
	Index of protection (IP)		IP44							
Condenser fan motor 2	Type		Induction motor							
	Quantity		1							
	Index of protection (IP)		IP44							
Compressor 1	Type		Scroll							
	Quantity		1							
	Oil type		POE							
	Oil amount	cm³/fl.oz	3253 / 110	1656 / 56	1774 / 60	3253 / 110	3253 / 110	3253 / 110		
Compressor 2	Type		NA	Scroll						
	Quantity		NA	1						
	Oil type		NA	POE						
	Oil amount	cm³/fl.oz	NA	1656 / 56	1774 / 60	3253 / 110	3253 / 110	3253 / 110	3253 / 110	
Evaporator coil 1	Tube	Material	S.I.G.C.							
		Diameter	mm/in	9.53 / 3/8						
		Thickness	mm/in	0.35 / 0.014						
	Fin	Material	Aluminium							
		Thickness	mm/in	0.11 / 0.004						
		Face Area	m²/ft²	0.07 / 0.80	0.04 / 0.46	0.51 / 5.49	0.61 / 6.55	0.76 / 8.19	0.91 / 9.82	
		Row		3	3	4	4	4	4	
		Fin per inch		16	16	14	14	14	14	
Evaporator coil 2	Tube	Material	NA	S.I.G.C.						
		Diameter	mm/in	NA	9.53 / 3/8					
		Thickness	mm/in	NA	0.35 / 0.011	0.35 / 0.014	0.35 / 0.014	0.35 / 0.014	0.35 / 0.014	
	Fin	Material	NA	Aluminium						
		Thickness	mm/in	0.11 / 0.004						
		Face Area	m²/ft²	NA	0.04 / 0.46	0.51 / 5.49	0.61 / 6.55	0.76 / 8.19	0.91 / 9.82	
		Row		NA	3	4	4	4	4	
		Fin per inch		NA	16	14	14	14	14	
Condenser coil 1	Tube	Material	S.I.G.C.							
		Diameter	mm/in	9.53 / 3/8						
		Thickness	mm/in	0.35 / 0.014						
	Fin	Material	Aluminium							
		Thickness	mm/in	0.11 / 0.004						
		Face Area	m²/ft²	0.12 / 1.28	0.10 / 1.10	1.24 / 13.35	1.33 / 14.34	1.75 / 18.82	2.00 / 21.51	
		Row		2	3	3	3	3	3	
		Fin per inch		16	14	14	14	14	14	

3 Specifications

3-2 Components data - Heat pump			UATYQ250BY1	UATYQ350BY1	UATYQ450BY1	UATYQ550BY1	UATYQ600BY1	UATYQ700BY1						
Condenser coil 2	Tube	Material	NA	S.I.G.C.										
		Diameter mm/in	NA	9.53 / 3/8										
		Thickness mm/in	NA	0.35 / 0.014										
	Fin	Material	NA	Aliminium										
		Thickness mm/in	NA	0.11 / 0.004										
		Face Area m ² /ft ²	NA	0.10 / 1.10	1.24 / 13.35	1.33 / 14.34	1.75 / 18.82	2.00 / 21.51						
		Row	NA	3	3	3	3	3						
	Fin per inch		NA	14	14	14	14	14						
Air quality	Filter	Type	Washable saranet											
		Quantity pc	2	2	2	2	2	2						
	Filter size	Length mm/in	880 / 34.65	1126 / 44.3	1126 / 44.33	1497 / 58.9	1497 / 58.9	1497 / 58.9						
		Width mm/in	467 / 18.39	385 / 15.16	435 / 17.16	392 / 15.43	495 / 19.5	595 / 23.43						
		Thickness mm/in	4 / 0.16											
Casing	Material	Electro galvanised mild steel												
	External finishing	Epoxy polyester powder												
	Colour	Light grey												
	Insulation / thickness	PE / 10mm												
Notes			All specifications are subjected to change by the manufacturer without prior notice											
			S.I.G.C. - Seamless Inner Grooved Copper											

3-3 Electrical data - Heat pump			UATYQ250BY1	UATYQ350BY1	UATYQ450BY1	UATYQ550BY1	UATYQ600BY1	UATYQ700BY1	
Evaporator motor	Insulation grade		B						
	Power source	V/Ph/Hz	380 ~ 415 / 3 / 50						
	Rated input power	W	800	1160	1910	2580	3130	4220	
	Rated running current	A	1.7	3.10	3.7	4.70	5.8	7.8	
	Motor Output	W	1100	1500	2200	3000	3700	5500	
	Poles		4						
Condenser motor 1	Insulation grade		F						
	Power source	V/Ph/Hz	220 ~ 240 / 1 / 50						
	Rated input power	W	560	870	790	780	1700	1540	
	Rated running current	A	2.5	3.8	3.6	3.4	2.9	2.8	
	Motor Output	W	360	550	510	590	1200	1200	
	Poles		6						
Condenser motor 2	Insulation grade		F						
	Power source	V/Ph/Hz	220 ~ 240 / 1 / 50						
	Rated input power	W	710	870	790	780	1700	1540	
	Rated running current	A	3.2	3.8	3.6	3.4	2.9	2.8	
	Motor Output	W	420	550	510	590	1200	1200	
	Poles		6						
Compressor 1	Insulation grade		F						
	Power Source	V/Ph/Hz	380 ~ 415 / 3 / 50						
	Capacitor	μF	N/A						
	Rated input power (cooling)	W	7140	4460	5950	7530	8130	9180	
	Rated input power (heating)	W	5640	4350	5500	6740	7150	8300	
	Rated running current (cooling)	A	13.1	7.9	11.0	13.8	15	16.4	
	Rated running current (heating)	A	11.3	7.7	15.0	12.8	14.1	15.6	
Compressor 2	Locked rotor amp.	A	111	74	101.0	111	118	118	
	Insulation grade		N/A	F					
	Power Source	V/Ph/Hz	N/A	380 ~ 415 / 3 / 50					
	Capacitor	μF	N/A						
	Rated input power (cooling)	W	N/A	4360	5940	7930	8130	9350	
	Rated input power (heating)	W	N/A	4160	5180	6920	7150	8510	
	Rated running current (cooling)	A	N/A	7.8	11.2	14.1	15	16.7	
Notes			All specifications are subjected to change by the manufacturer without prior notice						
			All units are being tested and comply to ISO 5151						

4 Nomenclature

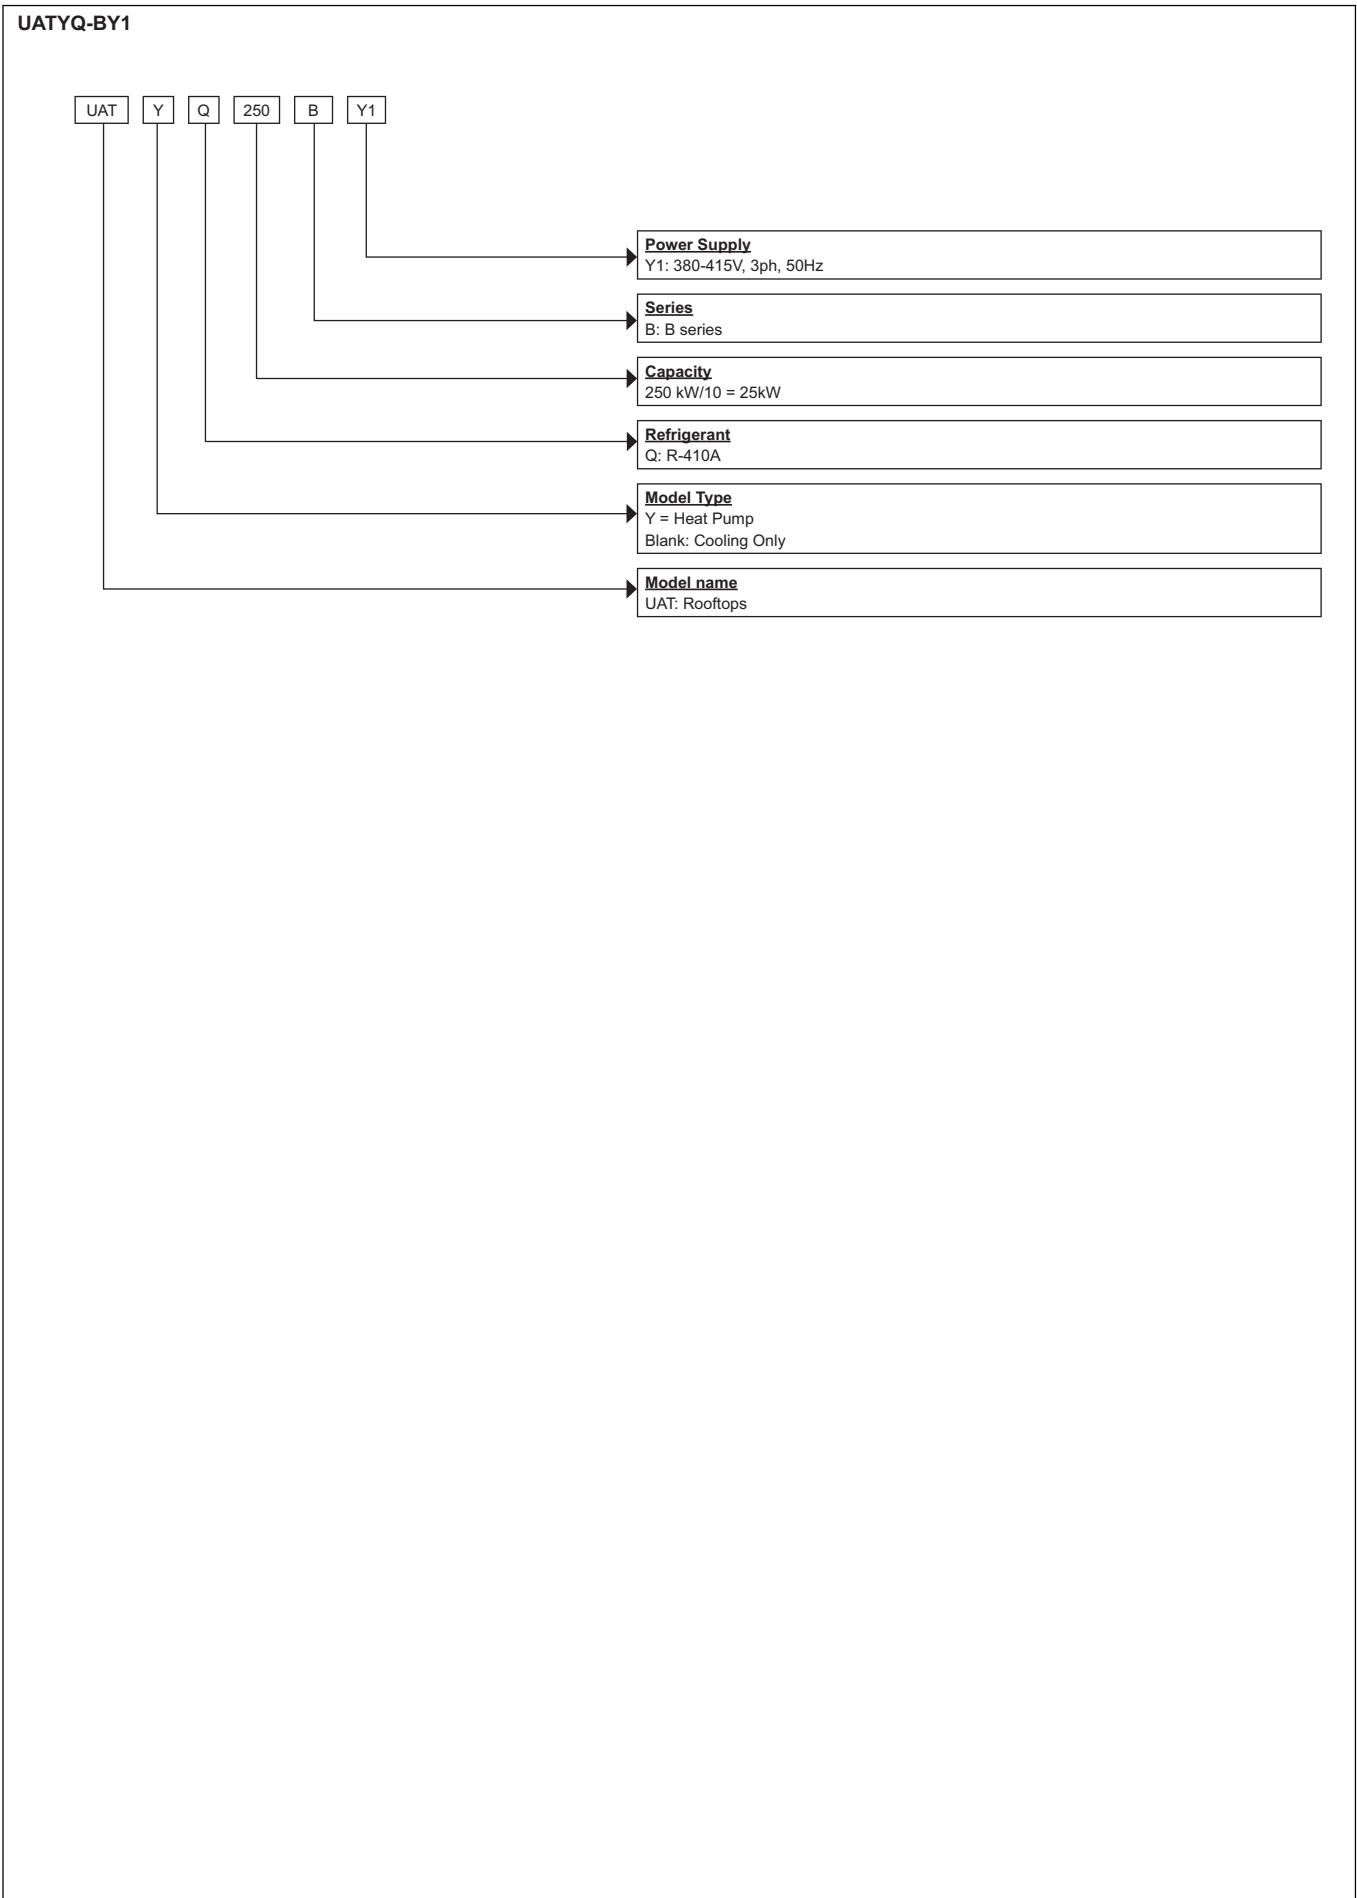

5 Safety device settings

UATYQ250-350BY1

Model			UATYQ250BY1	UATYQ350BY1	
Safety device	High pressure switch	Type	NC, Auto Reset		
		Open kPa/psi	4137 / 600		
		Close kPa/psi	3309 / 480		
	Low pressure switch	Type	NC, Auto Reset		
		Open kPa/psi	124 / 18		
		Close kPa/psi	193 / 28		
Phase sequencer			YES		
Discharge thermostat setting		°C/°F	120 / 248		

UATYQ450-550BY1

Model			UATYQ450BY1	UATYQ550BY1	
Safety device	High pressure switch	Type	NC, Auto Reset		
		Open kPa/psi	4137 / 600		
		Close kPa/psi	3309 / 480		
	Low pressure switch	Type	NC, Auto Reset		
		Open kPa/psi	124 / 18		
		Close kPa/psi	193 / 28		
Phase sequencer			YES		
Discharge Thermostat setting		°C/°F	120 / 248		

UATYQ600-700BY1

Model			UATYQ600BY1	UATYQ700BY1	
Safety device	High pressure switch	Type	NC, Auto Reset		
		Open kPa/psi	4137 / 600		
		Close kPa/psi	3309 / 480		
	Low pressure switch	Type	NC, Auto Reset		
		Open kPa/psi	124 / 18		
		Close kPa/psi	193 / 28		
Phase sequencer			YES		
Discharge thermostat setting		°C/°F	120 / 248		

6 Options

UATYQ-BY1

Model		Classification										
		Rooftop controller	PCB	EXV	Gold Fin (NA549)	Scroll compressor	Saranet Air Filter	Side flow	Convertible	Filter Drier	High pressure switch	Low pressure switch
UATYQ-BY1	250	X	X	X	X	X	X	X	X	X	X	X
	350	X	X	X	X	X	X	X	X	X	X	X
	450	X	X	X	X	X	X	X	X	X	X	X
	550	X	X	X	X	X	X	X	X	X	X	X
	600	X	X	X	X	X	X	X	X	X	X	X
	700	X	X	X	X	X	X	X	X	X	X	X

Remarks: Economizers & CO2 sensor will be ready soon.

7 Capacity tables

7 - 2 Capacity tables heating

UATYQ600BY1

Indoor DB, °C	Outdoor WB, °C									
	-5		6		12		15		18	
	TC (kW)	PI (kW)	TC (kW)	PI (kW)	TC (kW)	PI (kW)	TC (kW)	PI (kW)	TC (kW)	PI (kW)
15	43.85	14.19	61.88	17.03	71.71	18.58	76.63	19.36	81.55	20.13
17	42.61	14.83	61.81	17.91	69.37	19.58	74.10	20.42	78.82	21.26
19	41.38	15.47	61.73	18.78	67.04	20.59	71.56	21.49	76.09	22.39
51	40.14	16.10	60.05	19.65	64.70	21.59	69.03	22.55	73.36	23.52
23	38.90	16.73	56.76	20.52	62.36	22.59	66.50	23.62	70.64	24.65
25	37.67	17.37	53.47	21.39	60.02	23.59	63.96	24.69	67.91	25.79
27	36.43	18.00	50.18	22.27	57.68	24.59	61.43	25.75	65.18	26.92

UATYQ700BY1

Indoor DB, °C	Outdoor WB, °C									
	-5		6		12		15		18	
	TC (kW)	PI (kW)	TC (kW)	PI (kW)	TC (kW)	PI (kW)	TC (kW)	PI (kW)	TC (kW)	PI (kW)
15	49.48	13.42	69.82	16.11	80.91	17.57	86.46	18.30	92.00	19.03
17	48.43	14.02	69.73	16.93	80.08	18.52	85.67	19.31	91.26	20.10
19	47.38	14.63	69.65	17.76	79.26	19.46	84.88	20.32	90.51	21.17
51	46.32	15.22	68.86	18.58	78.43	20.41	84.09	21.33	89.76	22.24
23	45.27	15.82	67.37	19.40	77.60	21.36	83.31	22.33	89.01	23.31
25	44.22	16.42	65.87	20.23	76.77	22.31	82.52	23.34	88.26	24.38
27	43.17	17.02	64.38	21.05	75.95	23.25	81.73	24.35	87.52	25.45


NOTES - Hinweise - Σημειώσεις - Notas - Remarques - Note - Aantekeningen - Примечания - Notlar

TC = Total Cooling Capacity (kW) - Gesamte Kühlleistung (kW) - Συνολική σπόδοση ψύξης (kW) - Capacidad de refrigeración total (kW) - Puissance totale de refroidissement (kW) - Capacità di raffreddamento totale (kW) - Totale koelvermogen (kW) - Общая охлаждающая способность (kW) - Toplam soğutma kapasitesi (kW)

PI = Power Input (kW) - Leistungsaufnahme (kW) - Είσοδος ισχύος (kW) - Consumo (kW) - Puissance absorbée (kW) - Potenza assorbita (kW) - Vermogeninput (kW) - Потребляемая мощность (kW) - Güç girişi (kW)

8 Dimensional drawing & centre of gravity


UATYQ250BY1

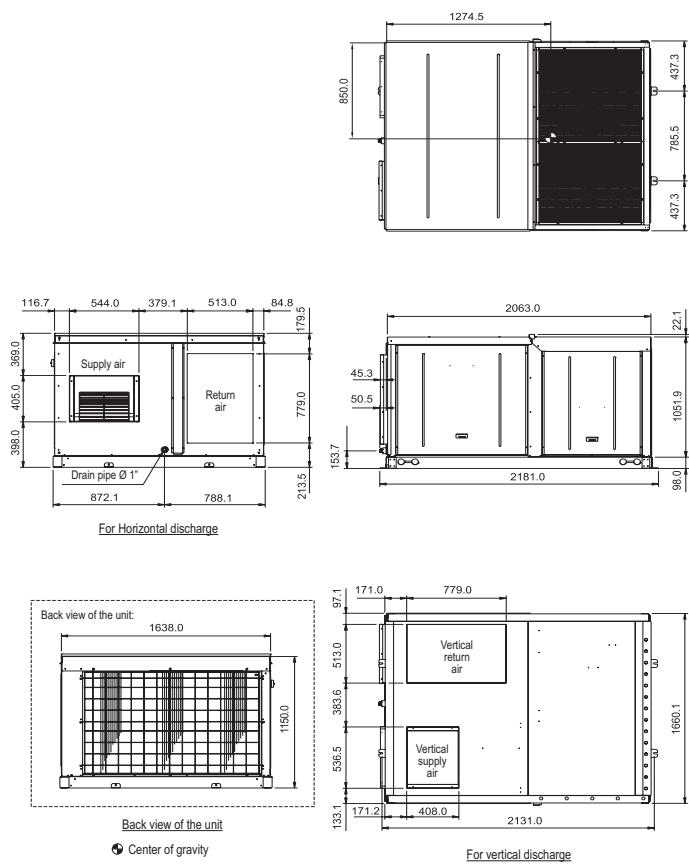

NOTES

1 All dimensions are in mm

UATYQ350BY1

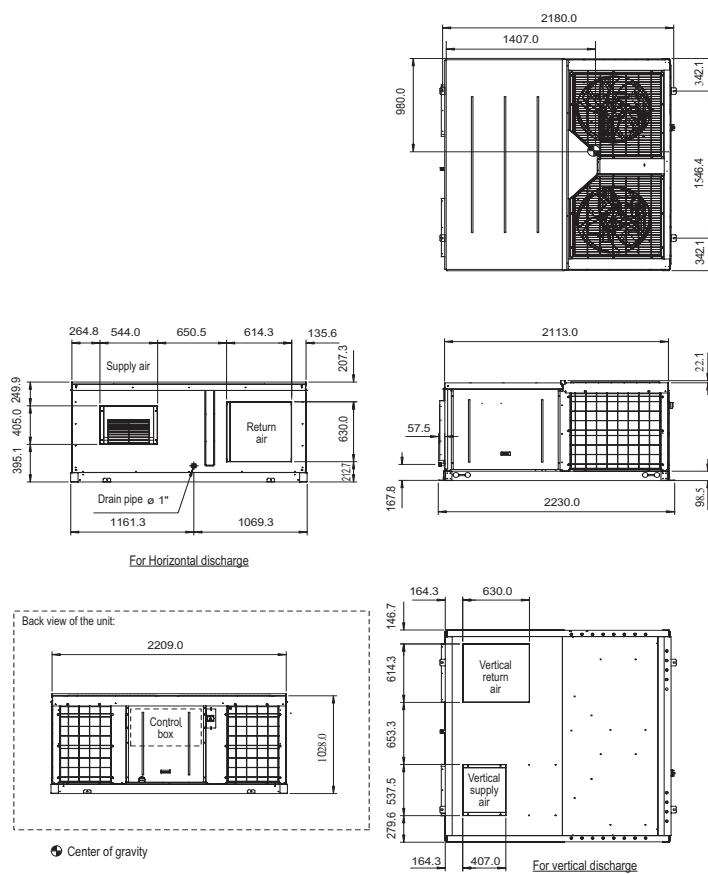


NOTES

1 All dimensions are in mm

8 Dimensional drawing & centre of gravity


UATYQ450BY1

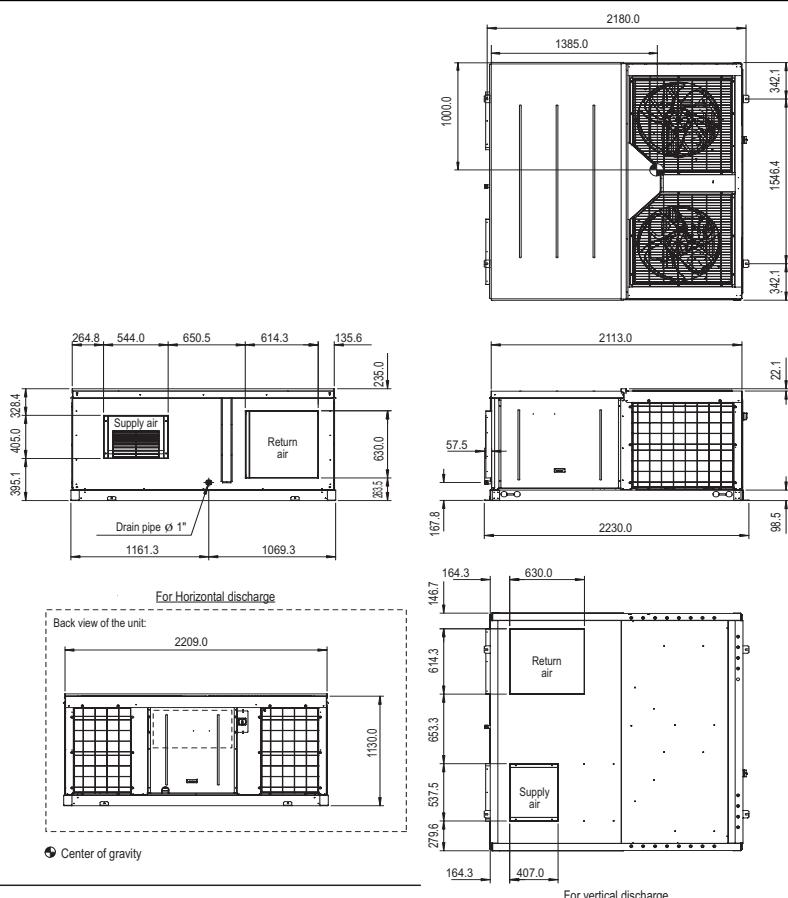

NOTES

- All dimensions are in mm


UATYQ550,600,700BY1

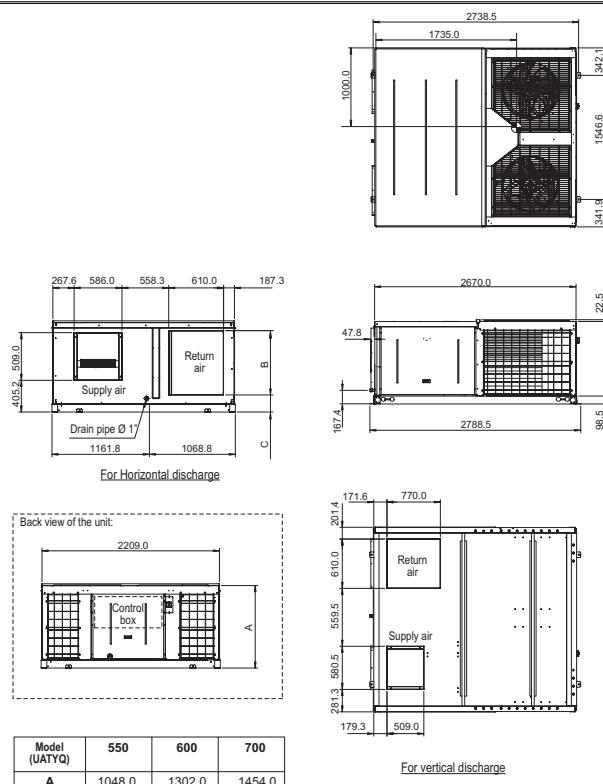

NOTES



- All dimensions are in mm

9 Piping diagram

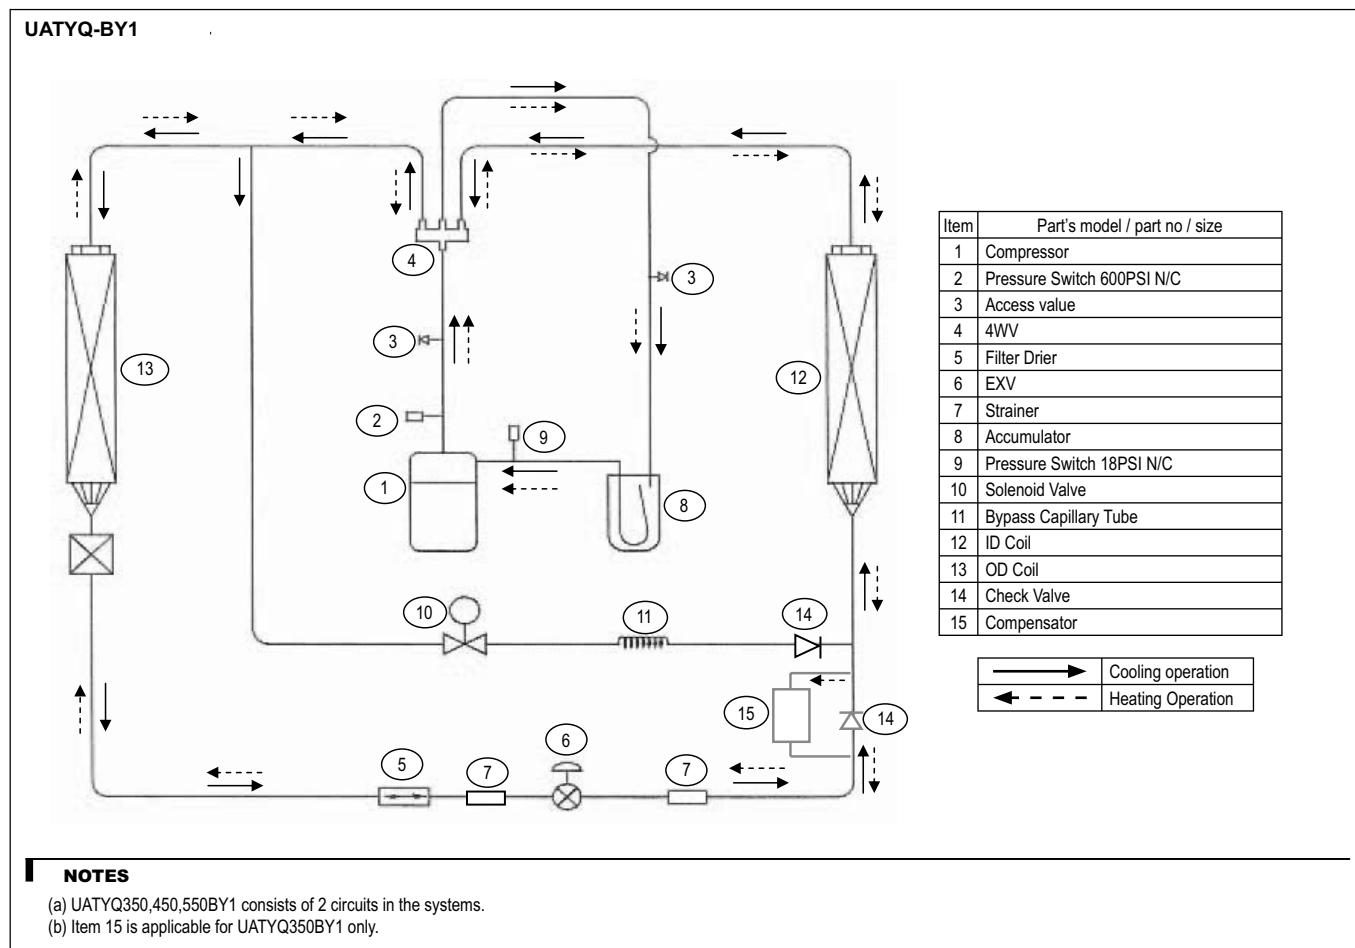

10 Wiring diagram

UATYQ250BY1

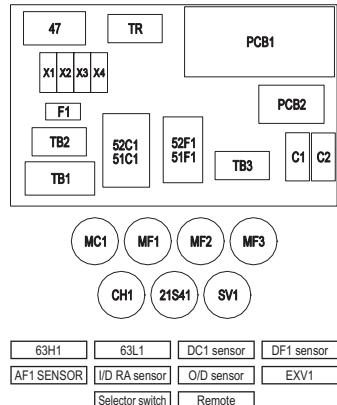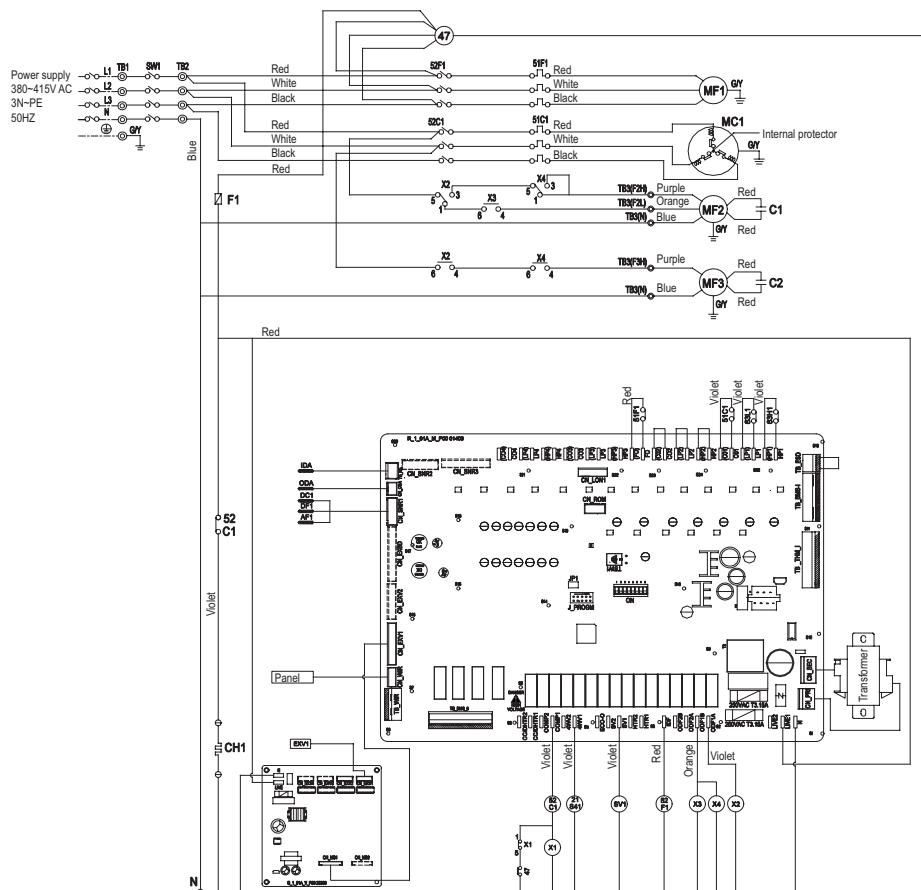

Symbol	Name
MC1/MC2	Compressor motor
MF1	Fan Motor (Indoor)
MF2,3	Fan Motor (Outdoor)
52C1/51C2	Contactor (Compressor)
TB 1,2,3,4	Terminal Block
F1	Fuse
51F1	Over current Relay (Fan I/D)
CH1/CH2	Crankcase Heater
47	Phase Protector
63H1/63H2	High Pressure Switch
63L1/63L2	Low Pressure Switch
C1, C2	Capacitor (O/D Fan Motor)
SV1/SW2	Solenoid Coil
21S41/21S42	4-Way Valve
X1,X2, X3, X4	Auxilliary Relays
SW1	Selector Switch
TR	Transformer 230V~24V
TB_RA	I/D Return Air Sensor
CN_ODA	O/D Air Sensor
CN_SNR1	Sensor DC1, DF1 & AF1
CN_SNR2	Sensor DC2, DF2 & AF2
CN_EXV1/CN_EXV2	Expansion Valve
CN_WIR	Panel Remote Control

0802 4 106498B

NOTES



- The dotted lines show field wiring.
- The figure in the parenthesis show field supply parts.
- Color of earth wire is yellow and green twisting.
- Specification subject to change without notice.

CAUTION

- To protect Indoor Fan motor from abnormal current, Over Current Relay <51F>, is installed. Therefore, do not change factory set value of the Over Current Relay.

10 Wiring diagram

UATYQ350-550BY1

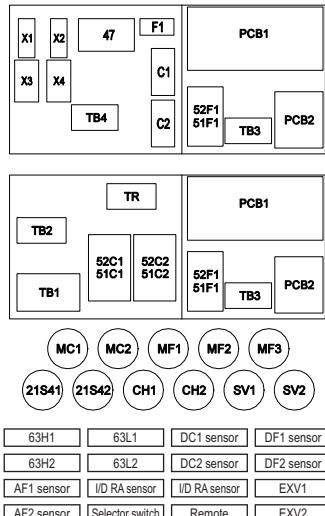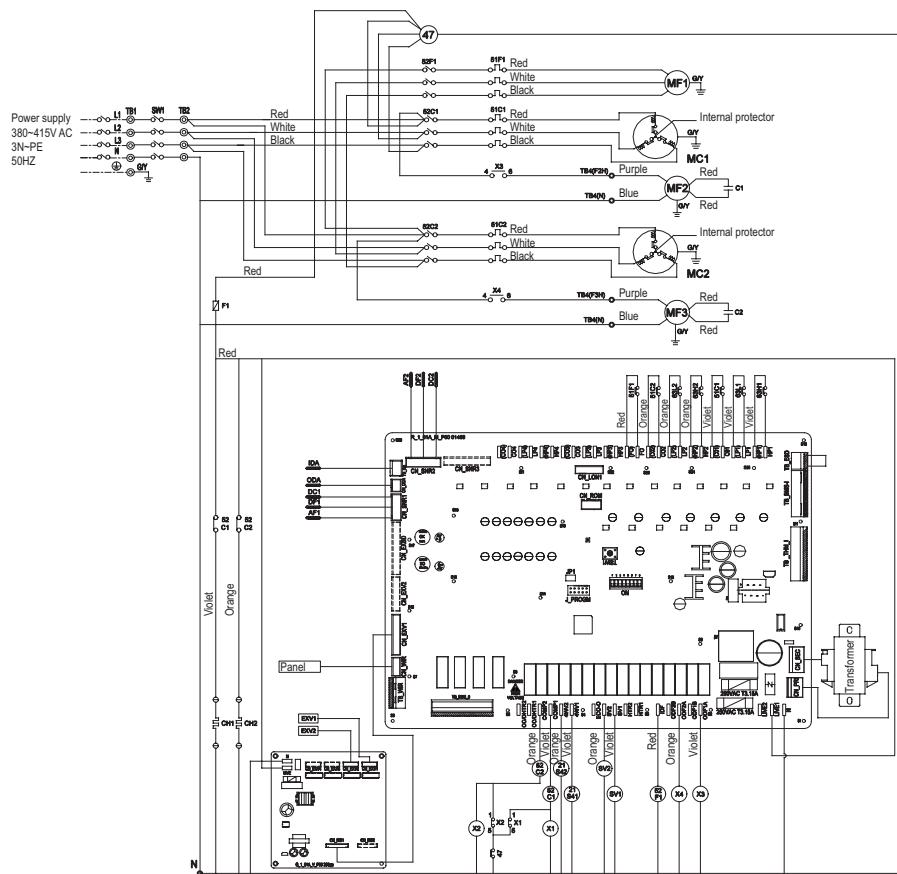

Symbol	Name
MC1/MC2	Compressor motor
MF1	Fan Motor (Indoor)
MF2,3	Fan Motor (Outdoor)
52C1/51C2	Contactor (Compressor)
52F1	Contactor (Fan I/D)
51C1/51C2	Over Current Relay (compressor)
TB 1,2,3,4	Terminal Block
F1	Fuse
51F1	Over current Relay (Fan I/D)
CH1/CH2	Crankcase Heater
47	Phase Protector
63H1/63H2	High Pressure Switch
63L1/63L2	Low Pressure Switch
C1, C2	Capacitor (O/D Fan Motor)
SV1/SV2	Solenoid Coil
21S41/21S42	4-Way Valve
X1,X2, X3, X4	Auxiliary Relays
SW1	Selector Switch
TR	Transformer 230V~24V
TB_RA	I/D Return Air Sensor
CN_ODA	O/D Air Sensor
CN_SNR1	Sensor DC1, DF1 & AF1
CN_SNR2	Sensor DC2, DF2 & AF2
CN_EXV1/CN_EXV2	Expansion Valve
CN_WIR	Panel Remote Control

0802 4 106505B

NOTES


- The dotted lines show field wiring.
- The figure in the parenthesis show field supply parts.
- Color of earth wire is yellow and green twisting.
- Specification subject to change without notice.

CAUTION


- To protect Indoor Fan motor from abnormal current, Over Current Relay <51F>, is installed. Therefore, do not change factory set value of the Over Current Relay.

10 Wiring diagram

UATYQ600-700BY1

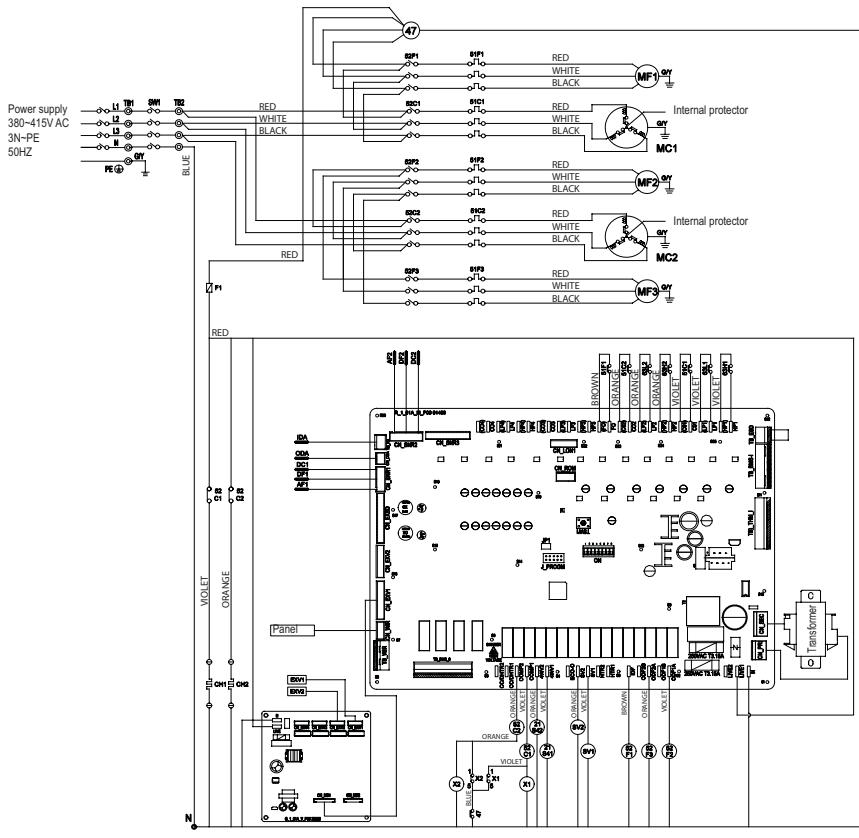

Arrangement

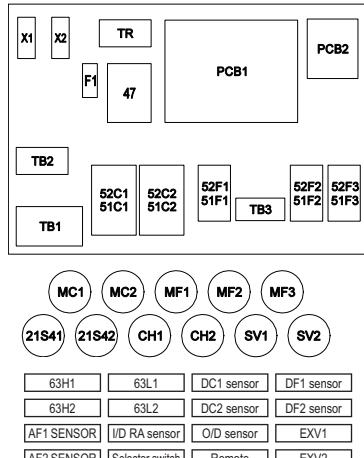

Colors

RED	: Red
WHITE	: White
BLACK	: Black
VIOLET	: Violet
ORANGE	: Orange
BLUE	: Blue

Symbol	Name
MC1/MC2	Compressor motor
MF1	Fan Motor (Indoor)
MF2,3	Fan Motor (Outdoor)
52C1/51C2	Contactor (Compressor)
52F1	Contactor (Fan I/D)
52F2/51F3	Contactor (Fan O/D)
51C1/51C2	Over Current Relay (Compressor)
TB 1,2,3,4	Terminal Block
F1	Fuse
51F1	Over current Relay (Fan I/D)
CH1/CH2	Crankcase Heater
47	Phase Protector
63H1/63H2	High Pressure Switch
63L1/63L2	Low Pressure Switch
SV1/SV2	Solenoid Coil
21S41/21S42	4-Way Valve
X1,X2	Auxiliary Relays
SW1	Selector switch
TR	Transformer 230V~24V
TB_RA	I/D Return Air Sensor
CN_ODA	O/D Air Sensor
CN_SNR1	Sensor DC1, DF1 & AF1
CN_SNR2	Sensor DC2, DF2 & AF2
CN_EXV1/CN_EXV2	Expansion Valve
CN_WIR	Panel Remote Control

0802 4 107686

NOTES



- The dotted lines show field wiring.
- The figure in the parenthesis show field supply parts.
- Color of earth wire is yellow and green twisting.
- Specification subject to change without notice.

CAUTION

- To protect Indoor Fan motor from abnormal current, Over Current Relay <51F>, is installed. Therefore, do not change factory set value of the Over Current Relay.

11 Sound data


11 - 1 Sound pressure spectrum

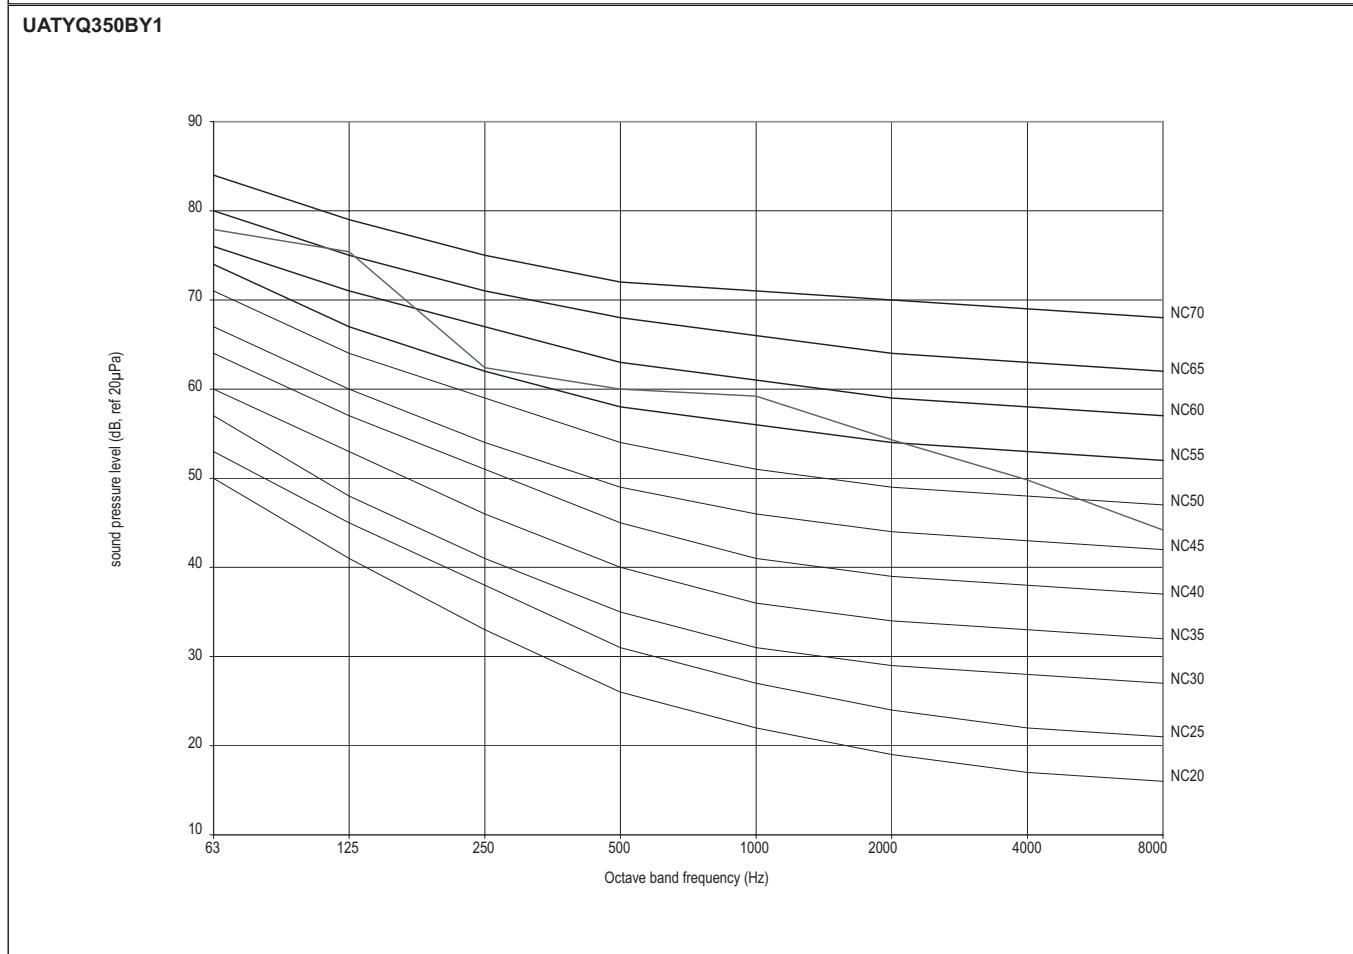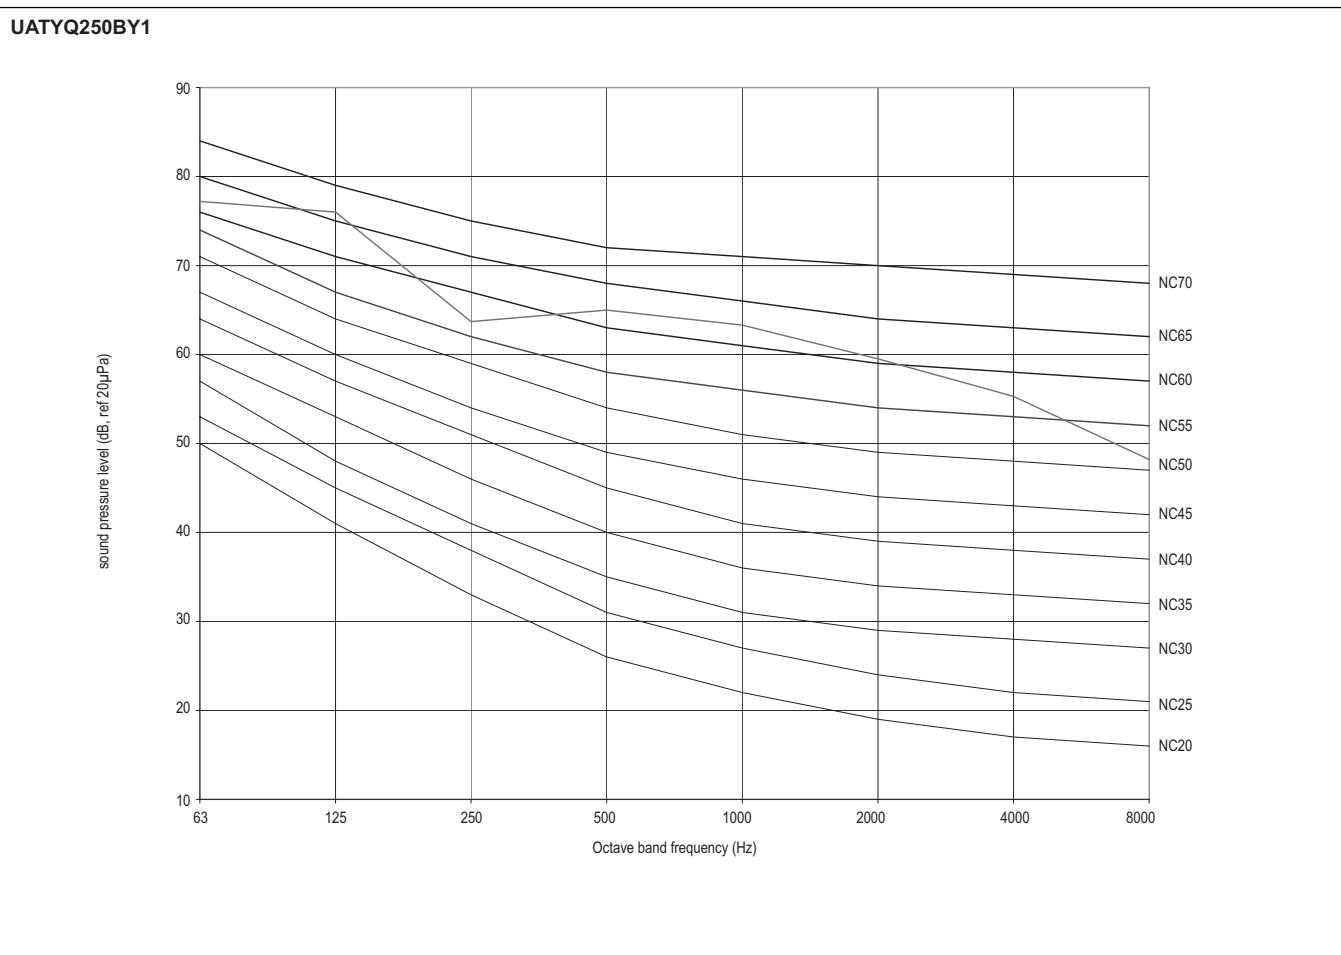


11 Sound data

11 - 1 Sound pressure spectrum

UATYQ450BY1

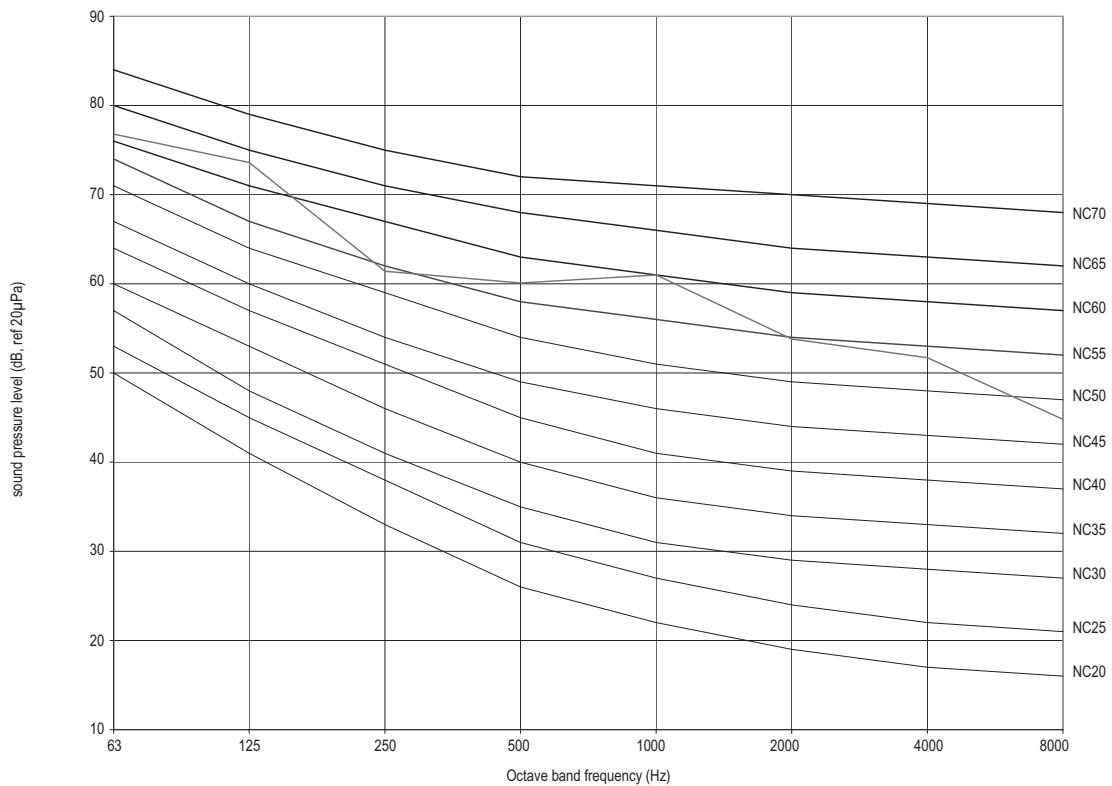


UATYQ550BY1

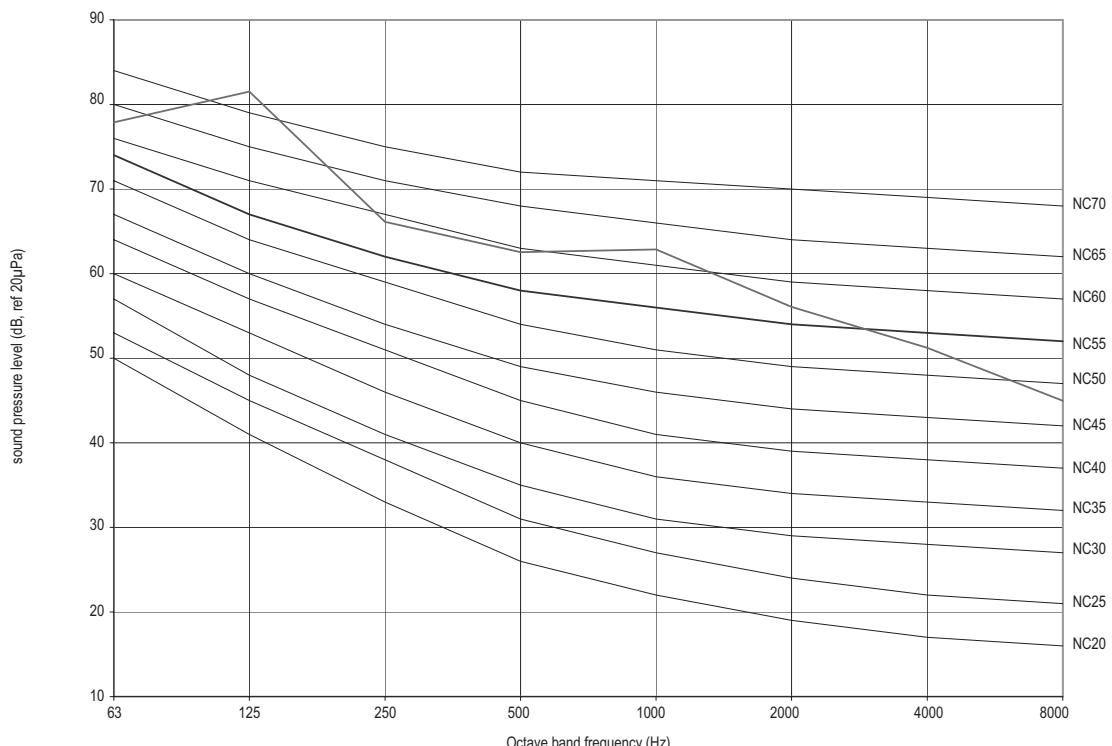


11 Sound data

11 - 1 Sound pressure spectrum

UATYQ600BY1

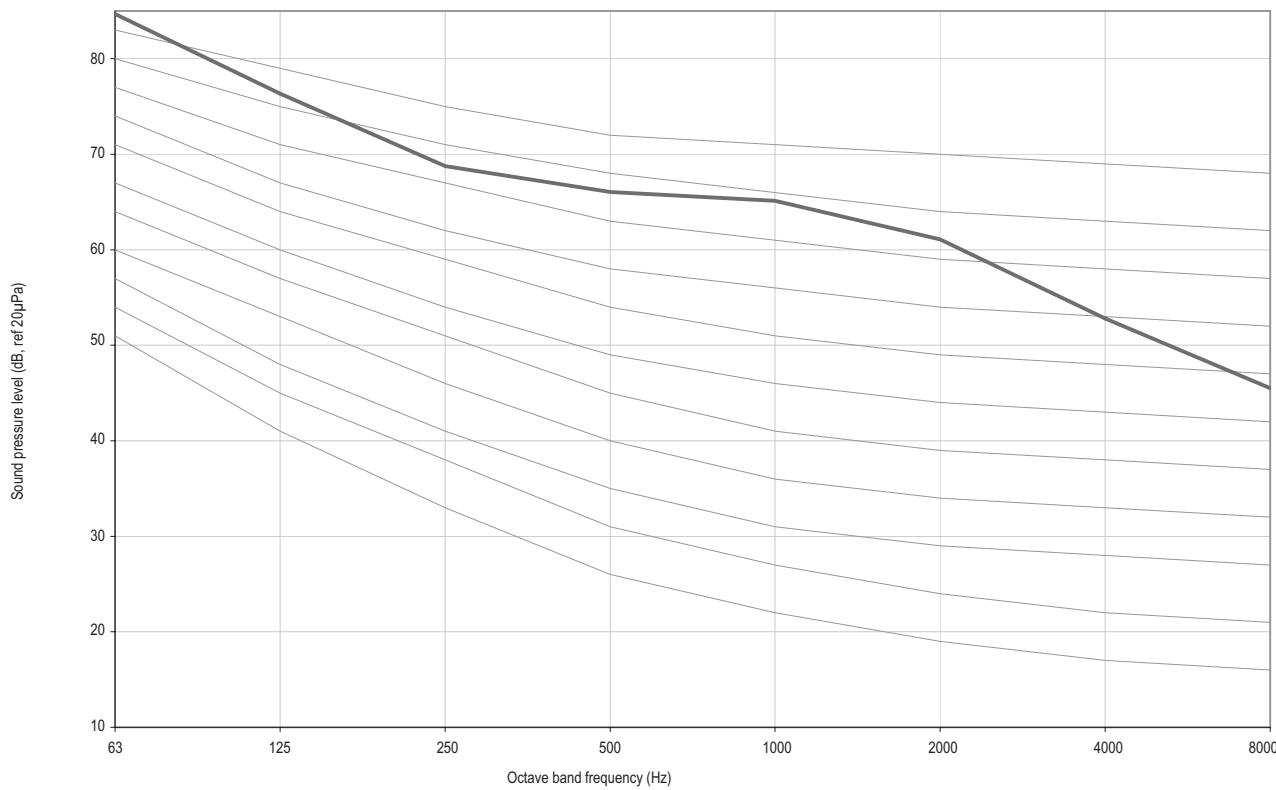

UATYQ700BY1

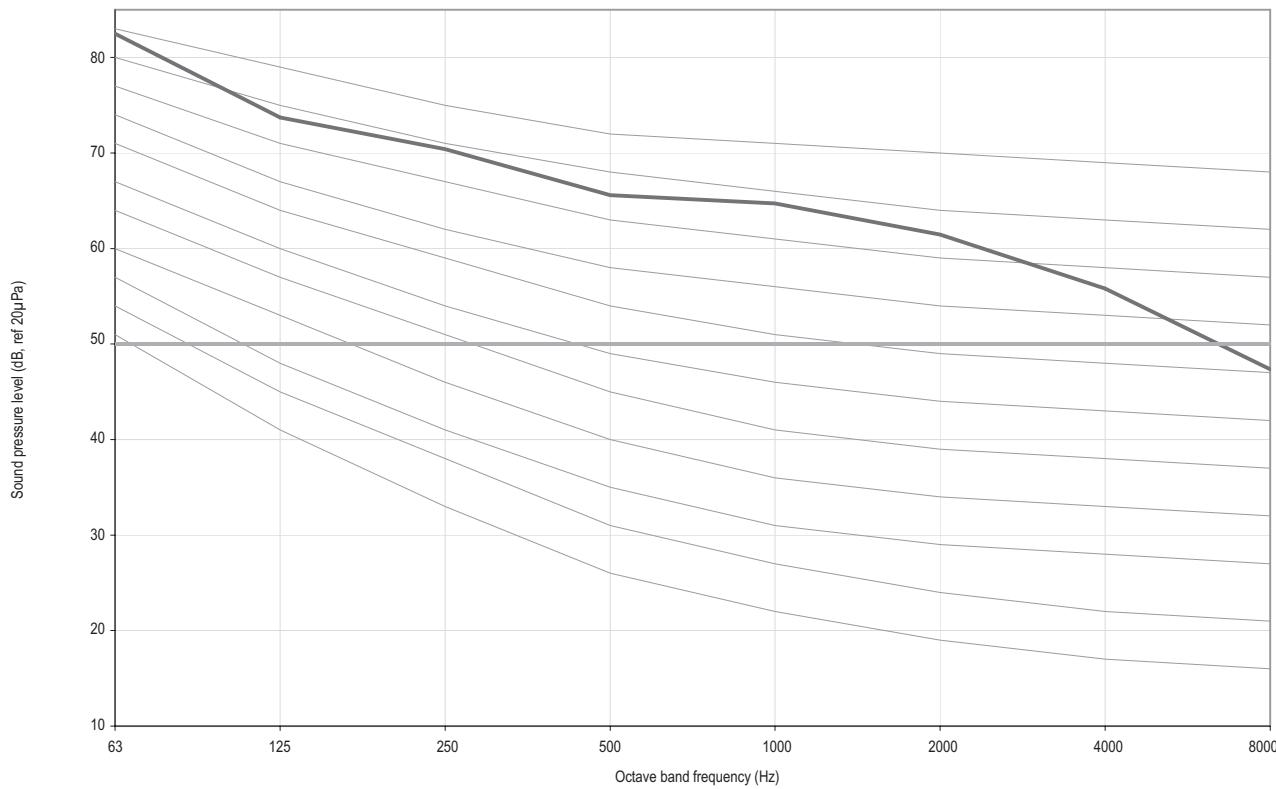

11 Sound data

11 - 2 Sound level data


UATYQ250-700BY1

Model	1/1 Octave Sound Pressure Level (dB, ref 20µPa)								Overall dB(A)	Noise Criteria (NC)
	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz		
UATYQ250BY1	77	76	64	65	63	60	55	48	68	66
UATYQ350BY1	78	75	62	60	59	54	50	44	64	65
UATYQ450BY1	77	74	61	60	61	54	52	54	65	63
UATYQ550BY1	78	82	66	63	63	56	51	45	68	73
UATYQ600BY1	85	76	69	66	65	61	53	46	70	66
UATYQ700BY1	83	74	70	66	65	62	56	47	70	68


Model	1/1 Octave Sound Power Level (dB, ref 1pW)								Overall dB(A)
	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	
UATYQ250BY1	91	91	79	78	78	72	68	61	82
UATYQ350BY1	96	91	79	78	80	72	70	64	83
UATYQ450BY1	93	90	79	78	80	73	71	64	83
UATYQ550BY1	95	96	83	82	84	78	73	66	87
UATYQ600BY1	101	94	87	85	87	81	76	69	90
UATYQ700BY1	99	91	88	85	86	83	77	69	90

12 Fan characteristics


UATYQ250BY1

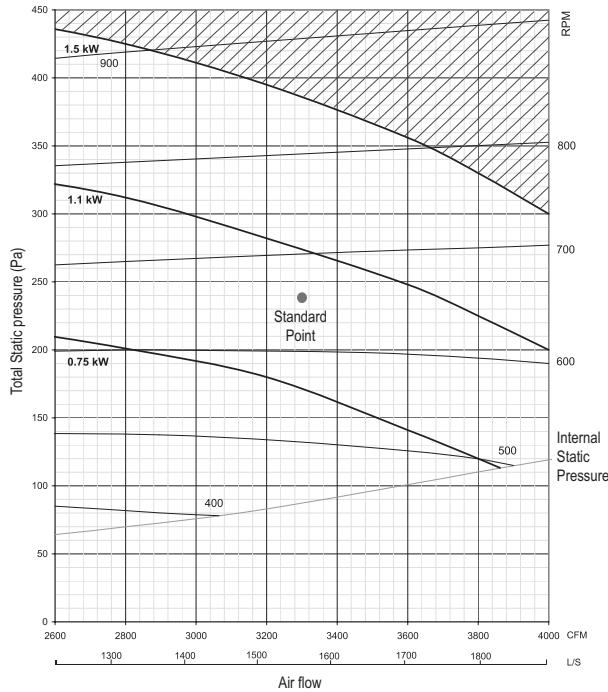


UATYQ350BY1

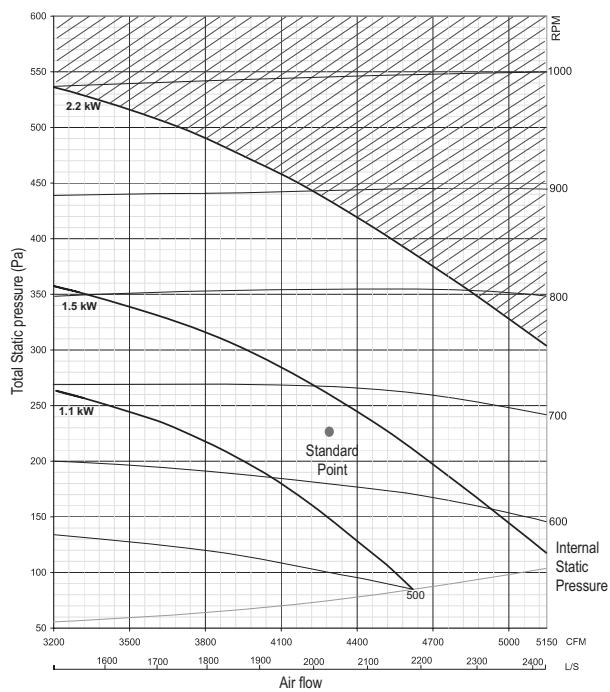



UATYQ450BY1

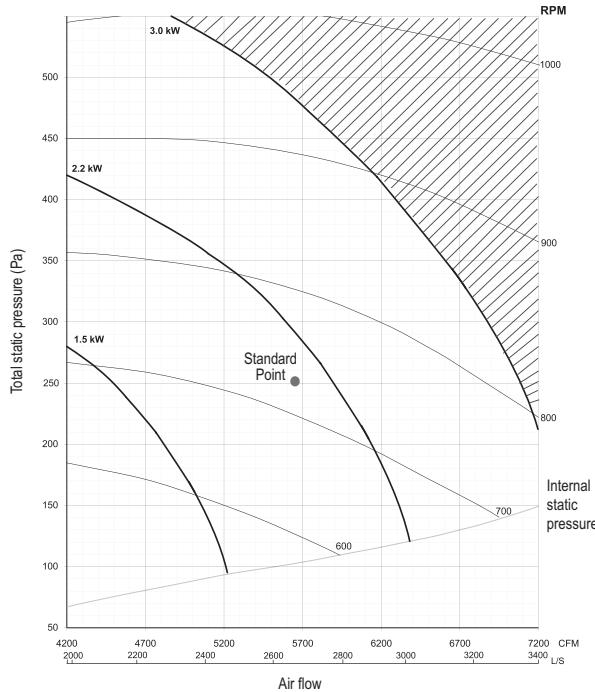

UATYQ550BY1

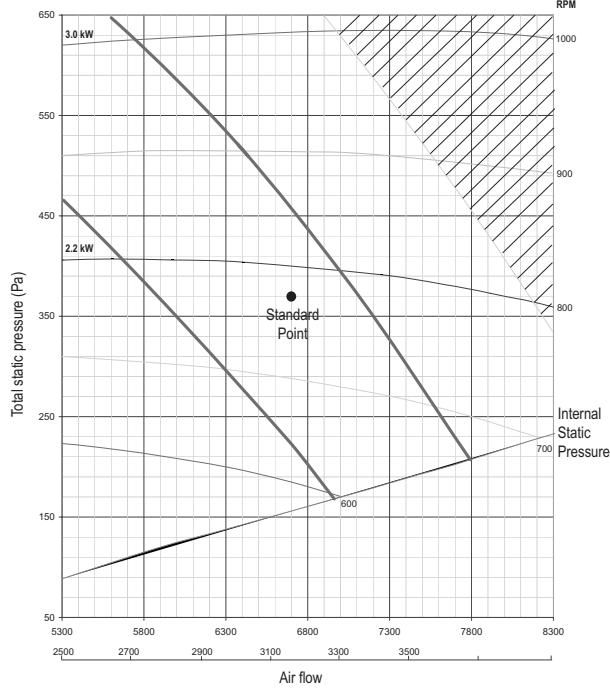

12 Fan characteristics

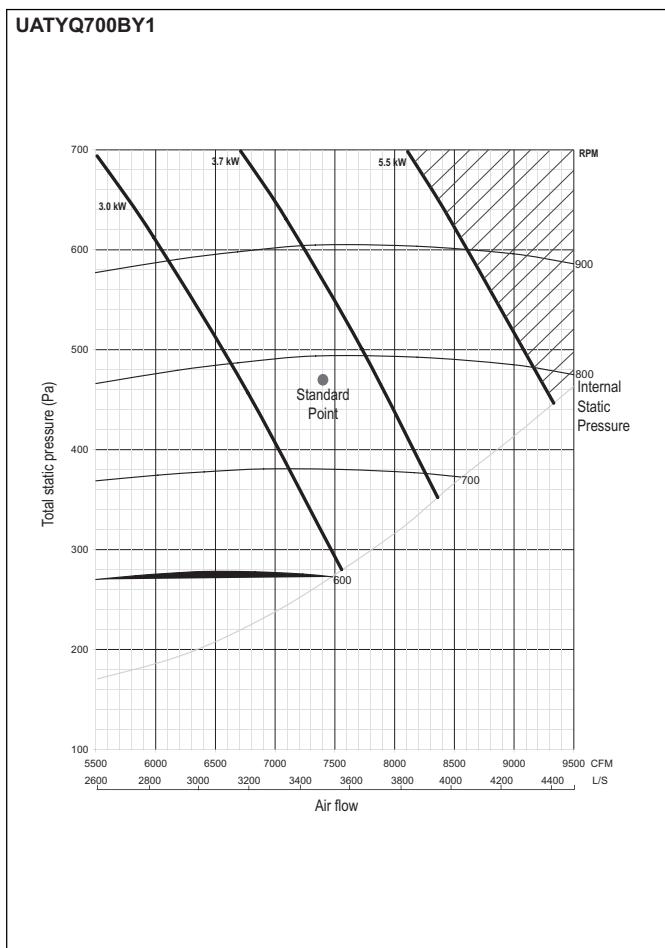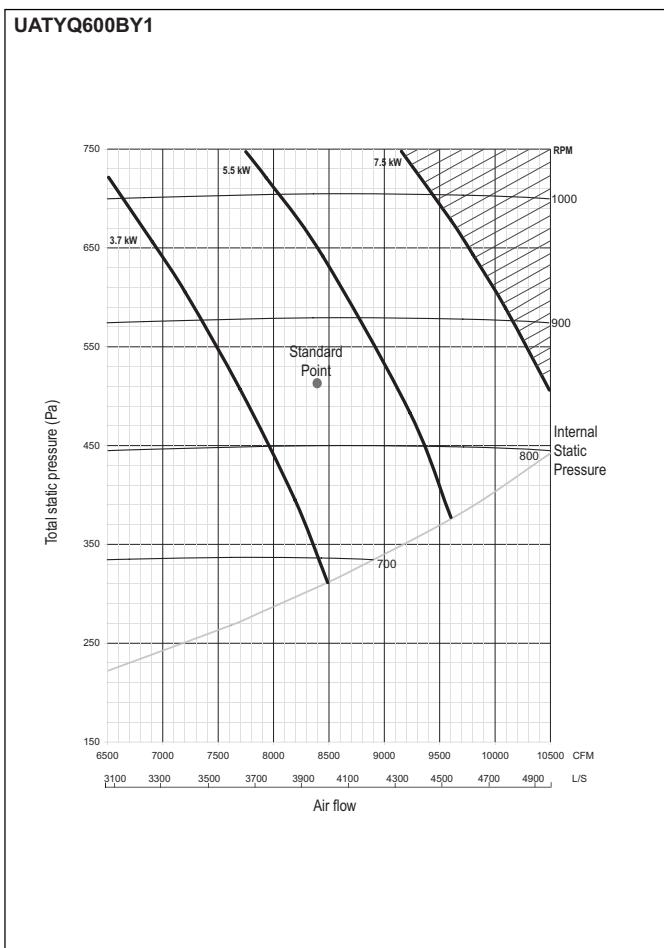



13 Installation

13 - 1 Roof curb drawings

UATYQ250-700BY1


Unit Support (For down throw unit only)

1. The figure shows the use of the roof curb for mounting these units.
2. The curb should be sealed and fixed to the roof by weather stripping. A suggested means of sealing the unit and roof curb as shown in the right.
3. Recommended roof curb dimension is shown below.

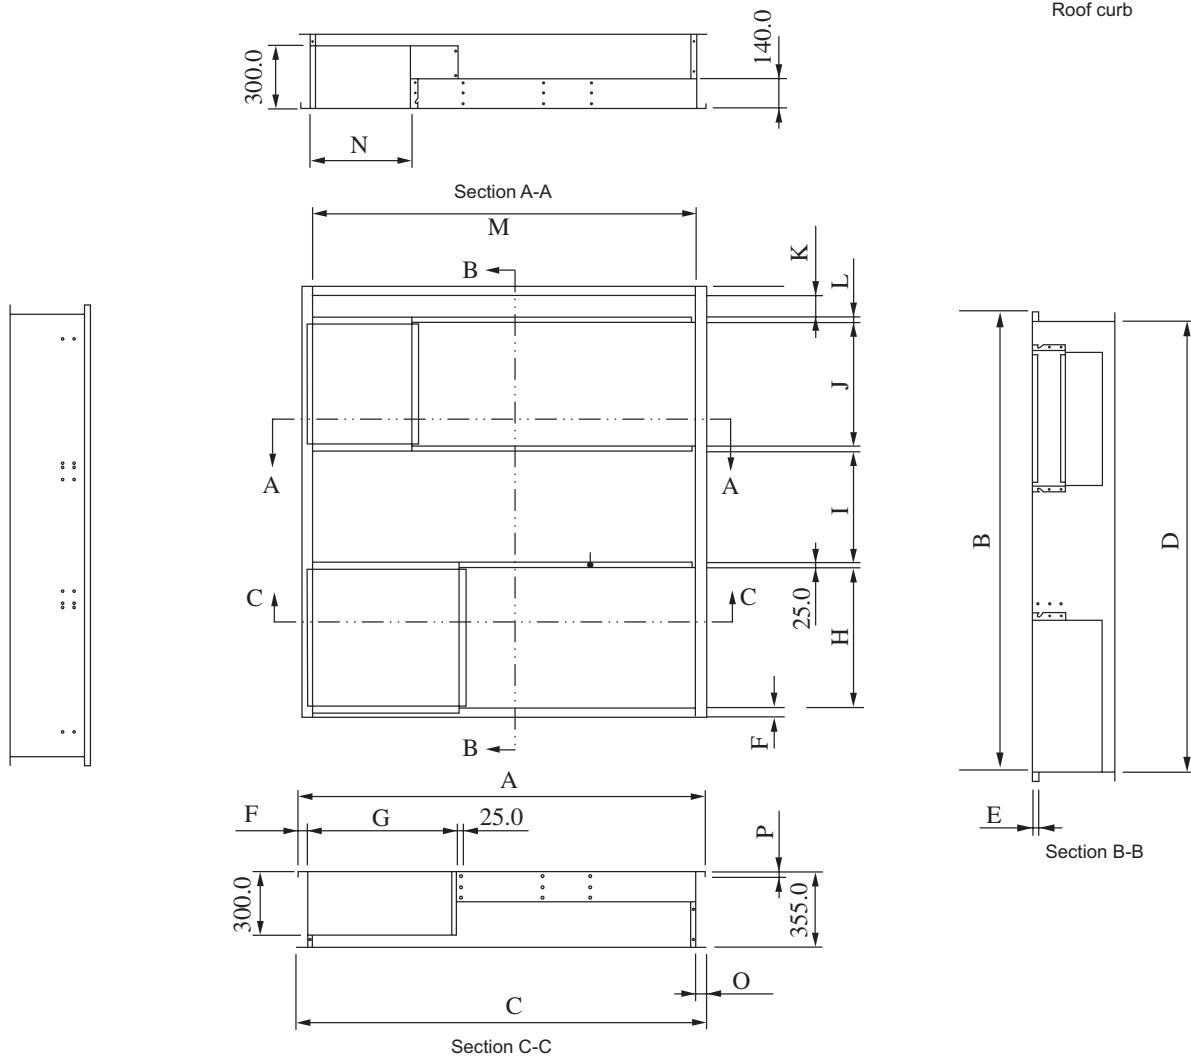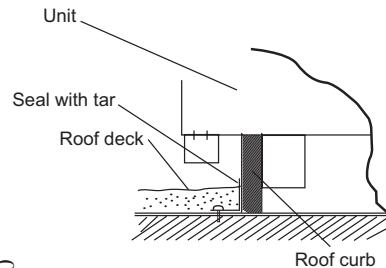

Model (UATYQ)	250	350/450	550/600/700
A	1821.0	1890.0	2448.0
B	1505.5	2081.0	2081.0
C	1881.0	1908.0	2466.0
D	1468.5	1998.0	1998.0
E	15.0	25.0	25.0
F	20.0	43.0	46.0
G	838.2	698.7	827.0
H	538.1	676.0	676.0
I	272.4	538.9	444.6
J	605.1	599.8	645.8
K	0.0	104.6	104.6
L	0.0	25.0	25.0
M	1781.0	1804.0	2362.0
N	479.7	475.7	589.0
O	50.0	52.0	52.0
P	15.0	25.0	25.0

Note: All dimensions are in mm

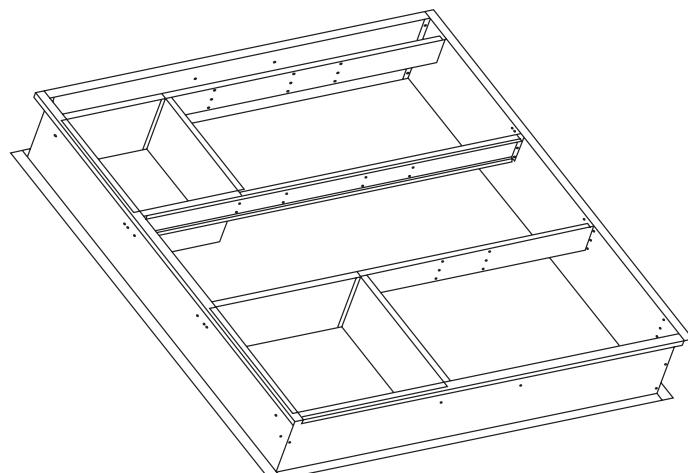

13 Installation

13 - 2 Pulley

UATYQ250BY1

The following are the design requirements for UATYQ250BY1 unit:

Model: UATYQ250BY1 unit

Supply air Quantity = 1600 l/s

External Static Pressure = 175 Pa

Step 1	From the blower curve (at 1600 l/s) Standard operating system; Internal Static Pressure = 90 Pa
Step 2:	Therefore at 1600 l/s and 175 Pa external static pressure Total Static Pressure = 175 + 90 Pa = 265 Pa
Step 3:	From the blower curve, the design requirement calls for RPM about 690 RPM. From the table: Motor pulley = 71 mm Blower pulley = 160 mm Motor RPM = 1480 RPM In order to obtain 680 RPM, we calculate the new blower pulley as: (while maintaining the motor pulley) $\begin{aligned} Db &= 71 \times (1480/690) \\ &= 152.3 \text{ mm} \end{aligned}$ Let us take close approximation of 150 mm diameter pulley size Recheck, with Db = 150 mm Blower pulley = $1480 \times (71/150)$ = 700 RPM We thus need to change the blower pulley from 160 mm to 150 mm in order to obtain the higher operating static pressure
Step 4:	When the pulley is changed, the V-belt length must be rechecked. $\begin{aligned} \text{V-belt length, L} &= 2C + 1.57 (Db = Dm) + (Db = Dm)^2 / 4C \\ &= (2 \times 545) + 1.57 (150 + 71) + (150 - 71)^2 / 4 \times 545 \\ &= 1439.8 \end{aligned}$ We thus can use a belt with length of 1440 mm Where, C = 545 mm distance between the centres of the two pulleys
Step 5:	From the blower curve, we can also notice that the motor power input has maintained within the current operating range of the standard unit's motor. Summary: i) Fan motor kW = 1.1 kW ii) Blower pulley diameter = 150 mm iii) V-belt size = 1440 mm

13 Installation

13 - 2 Pulley

UATYQ250-550BY1


Model	Blower Pulley, Db			Motor Pulley, Dm	
	Type	Diameter (mm)	Bore (mm)	Diameter (mm)	Bore (mm)
UATYQ250BY1	SPZ1	160	25	71	24
UATYQ350BY1	SPZ1	160	25	71	24
UATYQ450BY1	SPZ2	160	25	80	28
UATYQ550BY1	SPZ2	180	30	95	28
UATYQ600BY1	SPZ2	180	30	95	28
UATYQ700BY1	SPZ2	150	30	85	38

Model	V-belt length L (mm)	Pulley Centre Distance, C (mm)	Motor kW	Motor RPM
UATYQ250BY1	1450	545	1.1	1480
UATYQ350BY1	1600	620	1.5	1520
UATYQ450BY1	1420	590	2.2	1520
UATYQ550BY1	1862	715	3.0	1520
UATYQ600BY1	1900	725	3.7	1500
UATYQ700BY1	1737	670	5.5	1500

14 Operation range

UATYQ-BY1

Ensure the operating temperature is within the allowable range, as stated in diagram below:

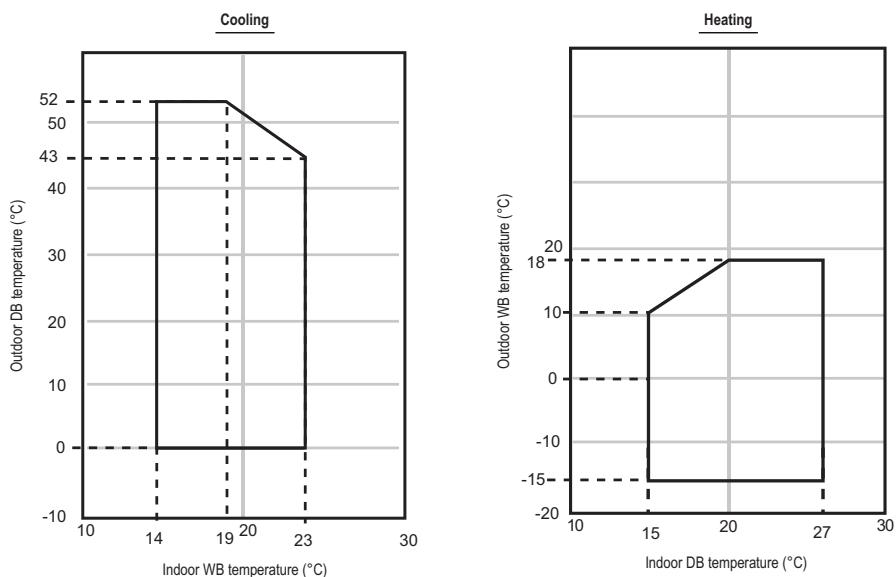**CAUTION**

The use of the air conditioner outside the range of working temperature and humidity can result in serious failure.



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



Daikin Europe N.V. is participating in the EUROVENT Certification Programme. Products are as listed in the EUROVENT Directory of Certified Products.



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V..

Daikin products are distributed by: