




Air Conditioners

Technical Data



Concealed Ceiling Unit (Small)

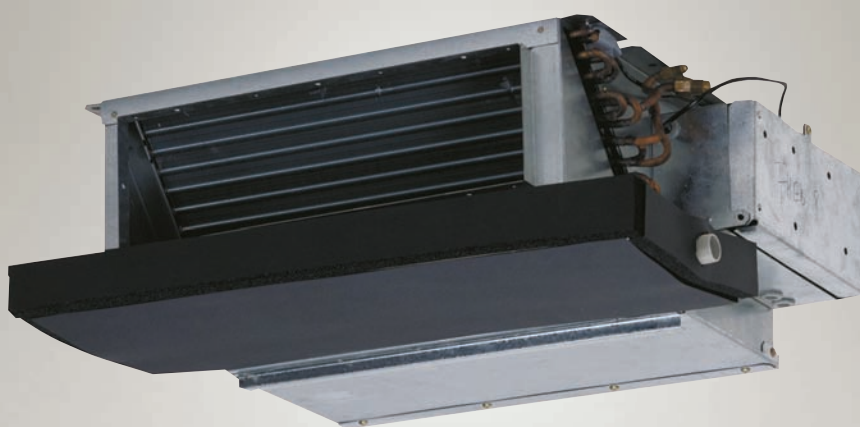

EEDEN10-204

FXDQ-M9V3B



Air Conditioners

Technical Data



Concealed Ceiling Unit (Small)



EEDEN10-204

FXDQ-M9V3B

TABLE OF CONTENTS

FXDQ-M9V3B

1	Specifications	2
	Technical Specifications	2
	Electrical Specifications (50Hz)	3
2	Safety device settings	4
3	Options	4
4	Capacity tables	5
	Cooling capacity tables	5
	Heating capacity tables	6
5	Dimensional drawing & centre of gravity	7
	Dimensional drawing	7
6	Piping diagram	8
7	Wiring diagram	9
	Wiring diagram	9
8	Sound data	10
	Sound level data	10
	Sound pressure spectrum	11

1 Specifications

1-1 Technical Specifications				FXDQ20M9V3B	FXDQ25M9V3B	
Capacity	Cooling	kW		2.2	2.8	
	Heating	kW		2.5	3.2	
Power Input (50Hz)	Cooling	kW		0.050		
	Heating	kW		0.050		
Casing	Colour	Non painted				
	Material	Galvanised steel				
Dimensions	Packing	Height	mm	301		
		Width	mm	584		
		Depth	mm	753		
	Unit	Height	mm	230		
		Width	mm	502		
		Depth	mm	652		
Weight	Unit	kg	17			
	Packed Unit	kg	18			
Required Ceiling Void			mm	>250		
Heat Exchanger	Dimensions	Length	mm	430		
		Nr of Rows		2		
		Fin Pitch	mm	1.4		
		Nr of Passes		2		
		Face Area	m ²	0.108		
		Nr of Stages		12		
		Empty Tubeplate Hole		4		
	Tube type	Hi-XSS (7)				
	Fin	Fin type	Symmetric waffle louvre			
		Treatment	Hydrophilic			
Fan	Type	Sirocco fan				
	Quantity	1				
Cooling	High	m ³ /min	6.7	7.4		
	Low	m ³ /min	5.2	5.8		
Heating	High	m ³ /min	6.7	7.4		
	Low	m ³ /min	5.2	5.8		
Fan	Motor	Quantity	1			
		Steps	step motor			
		Output (high)	W	10		
		Drive	Direct drive			
Refrigerant	Name	R-410A				
Sound level	Cooling	Sound power (nominal)	dB	50		
Cooling	Sound Pressure	High	dB	37		
		Low	dB	32		
Heating	Sound Pressure	High	dB	37		
		Low	dB	32		
Piping connections	Liquid (OD)	Type	Flare connection			
		Diameter	mm	6.35		
	Gas	Type	Flare connection			
		Diameter	mm	12.7		
	Drain	Diameter	mm	I.D. 21.6, O.D. 27.2		
	Air Filter			Resin net with mold resistance		
Air direction control			Up and downwards			
Refrigerant control			Electronic expansion valve			
Temperature control			Microprocessor thermostat for cooling and heating			
Safety devices			PC board fuse			
			Fan motor thermal protector			
Notes			Nominal cooling capacities are based on : indoor temperature : 27°CDB, 19°CWB, outdoor temperature : 35°CDB, equivalent refrigerant piping : 8m, level difference : 0m.			
			Nominal heating capacities are based on : indoor temperature : 20°CDB, outdoor temperature : 7°CDB, 6°CWB, equivalent refrigerant piping : 8m, level difference : 0m.			
			Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.			

1 Specifications

1-2 Electrical Specifications (50Hz)			FXDQ20M9V3B	FXDQ25M9V3B
Power Supply	Name		V1	
	Phase		1-	
	Frequency	Hz	50	
	Voltage	V	230	
Current	Minimum circuit amps (MCA)	A	0.2	
	Maximum fuse amps (MFA)	A	16	
	Full load amps (FLA)	A	0.1	
Voltage range	Minimum	V	-10%	
	Maximum	V	+10%	
Notes			Voltage range : units are suitable for use on electrical systems where voltage supplied to unit terminals is not below or above listed range limits.	
			Maximum allowable voltage range variation between phases is 2%.	
			MCA/MFA : MCA = 1.25 x FLA	
			MFA < 4 x FLA	
			Next lower standard fuse rating minimum 16A	
			Select wire size based on the MCA	
			Instead of a fuse, use a circuit breaker	

2 Safety device settings

		FXDQ20M9	FXDQ25M9
FAN MOTOR THERMAL PROTECTOR	°C	OFF:135 ^{±8} , (ON:87 ^{±15})	
PC BOARD FUSE		250V 10A	

3TW25511-3

3 Options

FXDQ20-25M9

Options

Nr.	Item
1	Wiring adapter (Hour meter)

Type	FXDQ20,25
	EKRP1B2 *1

Operation Control

Nr.	Item	Wired type	Wireless type
1	Remote		H/P C/O
2	Simplified remote control		
3	Remote control for hotel use		
4	Adapter for wiring		
5.1	Wiring adapter for electrical appendices (1)		
5.2	Wiring adapter for electrical appendices (2)		
6	Remote sensor		
7	Installation box for adapter PCB		
8	Central remote control		
8.1	Electrical box with earth terminal (3 blocks)		
9	Unified ON/OFF controller		
9.1	Electrical box with earth terminal (2 blocks)		
9.2	Noise filter (For electromagnetic interface use only)		
10	Schedule timer		
11	External adapter for outdoor unit (installation on indoor unit)		
11	Multi Tenant option		

Type	FXDQ20,25
	BRC1D52 / BRC1E51A *4
	BRC4C62
	BRC4C64
	BRC2C51
	BRC3A61
	KRP1B61
	KRP2A51
	KRP4A51
	KRCS01-1

	DCS302C51
	KJB311A
	DCS301B51
	KJB212A
	KEK26-1A
	DST301B51
	DTA104A61
	EKMITAC *3

*1 Fixing box is KRP1A90

*2 All options are supplied as kit.

*3 This kit contains parts to connect with 10 multi tenant indoor units.

*4 Included languages are: English, German, French, Dutch, Spanish, Italian, Greek, Portuguese, Russian and Turkish.

Contents of accessory bags

Description	Quantity
Installation and operation manual	1
Glass tube fuse 10A	1
Service instruction label	1

3TW31579-1A

4 Capacity tables

4 - 1 Cooling capacity tables

FXDQ-M9																
Unit size	Nominal capacity	Outdoor air temp.	Indoor air temperature													
			14.OWB		16.OWB		18.OWB		19.OWB		20.OWB		22.OWB		24.OWB	
			20.ODB		23.ODB		26.ODB		27.ODB		28.ODB		30.ODB		32.ODB	
			°CDB	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC
20	2.2	10.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.9	2.9	1.9
		12.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.9	2.9	1.9
		14.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.9	2.8	1.9
		16.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.9	2.8	1.8
		18.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.9	2.7	1.8
		20.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.9	2.7	1.8
		21.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.9	2.7	1.8
		23.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.9	2.6	1.7
		25.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.6	1.8	2.6	1.7
		27.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.5	1.8	2.6	1.7
		29.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.5	1.8	2.5	1.7
		31.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.4	1.8	2.5	1.7
		33.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.9	2.4	1.8	2.5	1.7
		35.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.4	1.8	2.4	1.7
		37.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.3	1.8	2.4	1.7
		39.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.2	1.8	2.3	1.7	2.3	1.6
25	2.8	10.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.3	3.7	2.3
		12.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.3	3.6	2.2
		14.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.3	3.6	2.2
		16.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.3	3.5	2.2
		18.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.3	3.5	2.2
		20.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.3	3.4	2.1
		21.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.3	3.4	2.1
		23.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.3	2.2	3.4	2.1
		25.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.3	2.2	3.3	2.1
		27.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.2	2.2	3.3	2.1
		29.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.2	2.2	3.2	2.0
		31.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.1	2.1	3.2	2.0
		33.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.1	2.1	3.1	2.0
		35.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.0	2.1	3.1	2.0
		37.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	2.9	2.2	3.0	2.1	3.0	2.0
		39.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	2.9	2.2	2.9	2.1	3.0	2.0

3TW25772-1

4 Capacity tables

4 - 2 Heating capacity tables

FXDQ-M9										
Unit Size	Nominal capacity	Outdoor air temperature		Indoor air temperature °CDB						
				16.0	18.0	20.0		21.0	22.0	24.0
		°CDB	°CWB	kW	kW	kW	kW	kW	kW	kW
20	2.5	-19.8	-20.0	1.5	1.5	1.5	1.5	1.5	1.5	1.5
		-18.8	-19.0	1.5	1.5	1.5	1.5	1.5	1.5	1.5
		-16.7	-17.0	1.6	1.6	1.6	1.6	1.6	1.6	1.6
		-14.7	-15.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		-12.6	-13.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8
		-10.5	-11.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		-9.5	-10.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		-8.5	-9.1	2.0	2.0	1.9	1.9	1.9	1.9	1.9
		-7.0	-7.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0
		-5.0	-5.6	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		-3.0	-3.7	2.2	2.2	2.2	2.2	2.2	2.2	2.2
		0.0	-0.7	2.3	2.3	2.3	2.3	2.3	2.3	2.2
		3.0	2.2	2.5	2.5	2.4	2.4	2.3	2.3	2.2
		5.0	4.1	2.5	2.5	2.5	2.4	2.3	2.2	2.2
		7.0	6.0	2.6	2.6	2.5	2.4	2.3	2.2	2.2
		9.0	7.9	2.7	2.7	2.5	2.4	2.3	2.2	2.2
11.0	9.8	2.8	2.7	2.5	2.4	2.3	2.2	2.2		
13.0	11.8	2.8	2.7	2.5	2.4	2.3	2.2	2.2		
15.0	13.7	2.8	2.7	2.5	2.4	2.3	2.2	2.2		
25	3.2	-19.8	-20.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		-18.8	-19.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		-16.7	-17.0	2.1	2.1	2.0	2.0	2.0	2.0	2.0
		-14.7	-15.0	2.2	2.2	2.2	2.2	2.2	2.1	2.1
		-12.6	-13.0	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		-10.5	-11.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4
		-9.5	-10.0	2.5	2.4	2.4	2.4	2.4	2.4	2.4
		-8.5	-9.1	2.5	2.5	2.5	2.5	2.5	2.5	2.5
		-7.0	-7.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
		-5.0	-5.6	2.7	2.7	2.7	2.7	2.7	2.7	2.7
		-3.0	-3.7	2.8	2.8	2.8	2.8	2.8	2.8	2.8
		0.0	-0.7	3.0	3.0	3.0	3.0	3.0	2.8	2.8
		3.0	2.2	3.1	3.1	3.1	3.1	3.0	2.8	2.8
		5.0	4.1	3.3	3.2	3.2	3.1	3.0	2.8	2.8
		7.0	6.0	3.4	3.4	3.2	3.1	3.0	2.8	2.8
		9.0	7.9	3.5	3.4	3.2	3.1	3.0	2.8	2.8
11.0	9.8	3.6	3.4	3.2	3.1	3.0	2.8	2.8		
13.0	11.8	3.6	3.4	3.2	3.1	3.0	2.6	2.6		
15.0	13.7	3.6	3.4	3.2	3.1	3.0	2.8	2.8		

3TW25512-2B

5 Dimensional drawing & centre of gravity

5 - 1 Dimensional drawing

FXDQ-M9


The drawing includes three views of the FXDQ-M9 indoor unit:

- Top View:** Shows a rectangular unit with a width of 508 mm (suspension position) and a height of 273 mm. It features two suspension points, each 14 mm from the top edge. The distance between suspension points is 254 mm. The bottom edge has two rows of mounting holes: 2 x 150 + 300 mm and 3 x 130 + 390 mm. Other dimensions include 176 mm, 717 mm, 39 mm, 81 mm, 128 mm, and 209 mm.
- Side View:** Shows the unit's profile with a total height of 100 mm. The top edge has a 91 mm wide section. The bottom edge has a 134 mm wide section. The distance from the top edge to the bottom edge is 71 mm. The distance from the top edge to the bottom edge is 29 mm. The distance from the top edge to the bottom edge is 422 mm. The distance from the top edge to the bottom edge is 480 mm. The distance from the top edge to the bottom edge is 32 mm. The distance from the top edge to the bottom edge is 88 mm. The distance from the top edge to the bottom edge is 156 mm. The distance from the top edge to the bottom edge is 76 mm. The distance from the top edge to the bottom edge is 230 mm. The distance from the top edge to the bottom edge is 250 or more mm. The distance from the top edge to the bottom edge is 651 mm. The distance from the top edge to the bottom edge is 300 or more mm. The distance from the top edge to the bottom edge is 6 mm.
- Front View:** Shows the unit's front face with a width of 425 mm and a height of 156 mm. It features a liquid pipe connection (1), a gas pipe connection (2), a drain hole (3), a transmission wiring port (4), a power supply wiring port (5), a service space (6), a switch box (7), and a nameplate (8). The distance from the top edge to the bottom edge is 95 mm. The distance from the top edge to the bottom edge is 88 mm. The distance from the top edge to the bottom edge is 41 mm. The distance from the top edge to the bottom edge is 164 mm. The distance from the top edge to the bottom edge is 425 mm. The distance from the top edge to the bottom edge is 460 mm.

Nr	Part name
1	Liquid pipe connection (ø 6.35)
2	Gas pipe connection (ø 12.7)
3	Drain hole (o.d. ø 27.2 - i.d. ø 21.6)
4	Transmission wiring port
5	Power supply wiring port
6	Service space
7	Switch box
8	Nameplate

3TW25774-1


6 Piping diagram

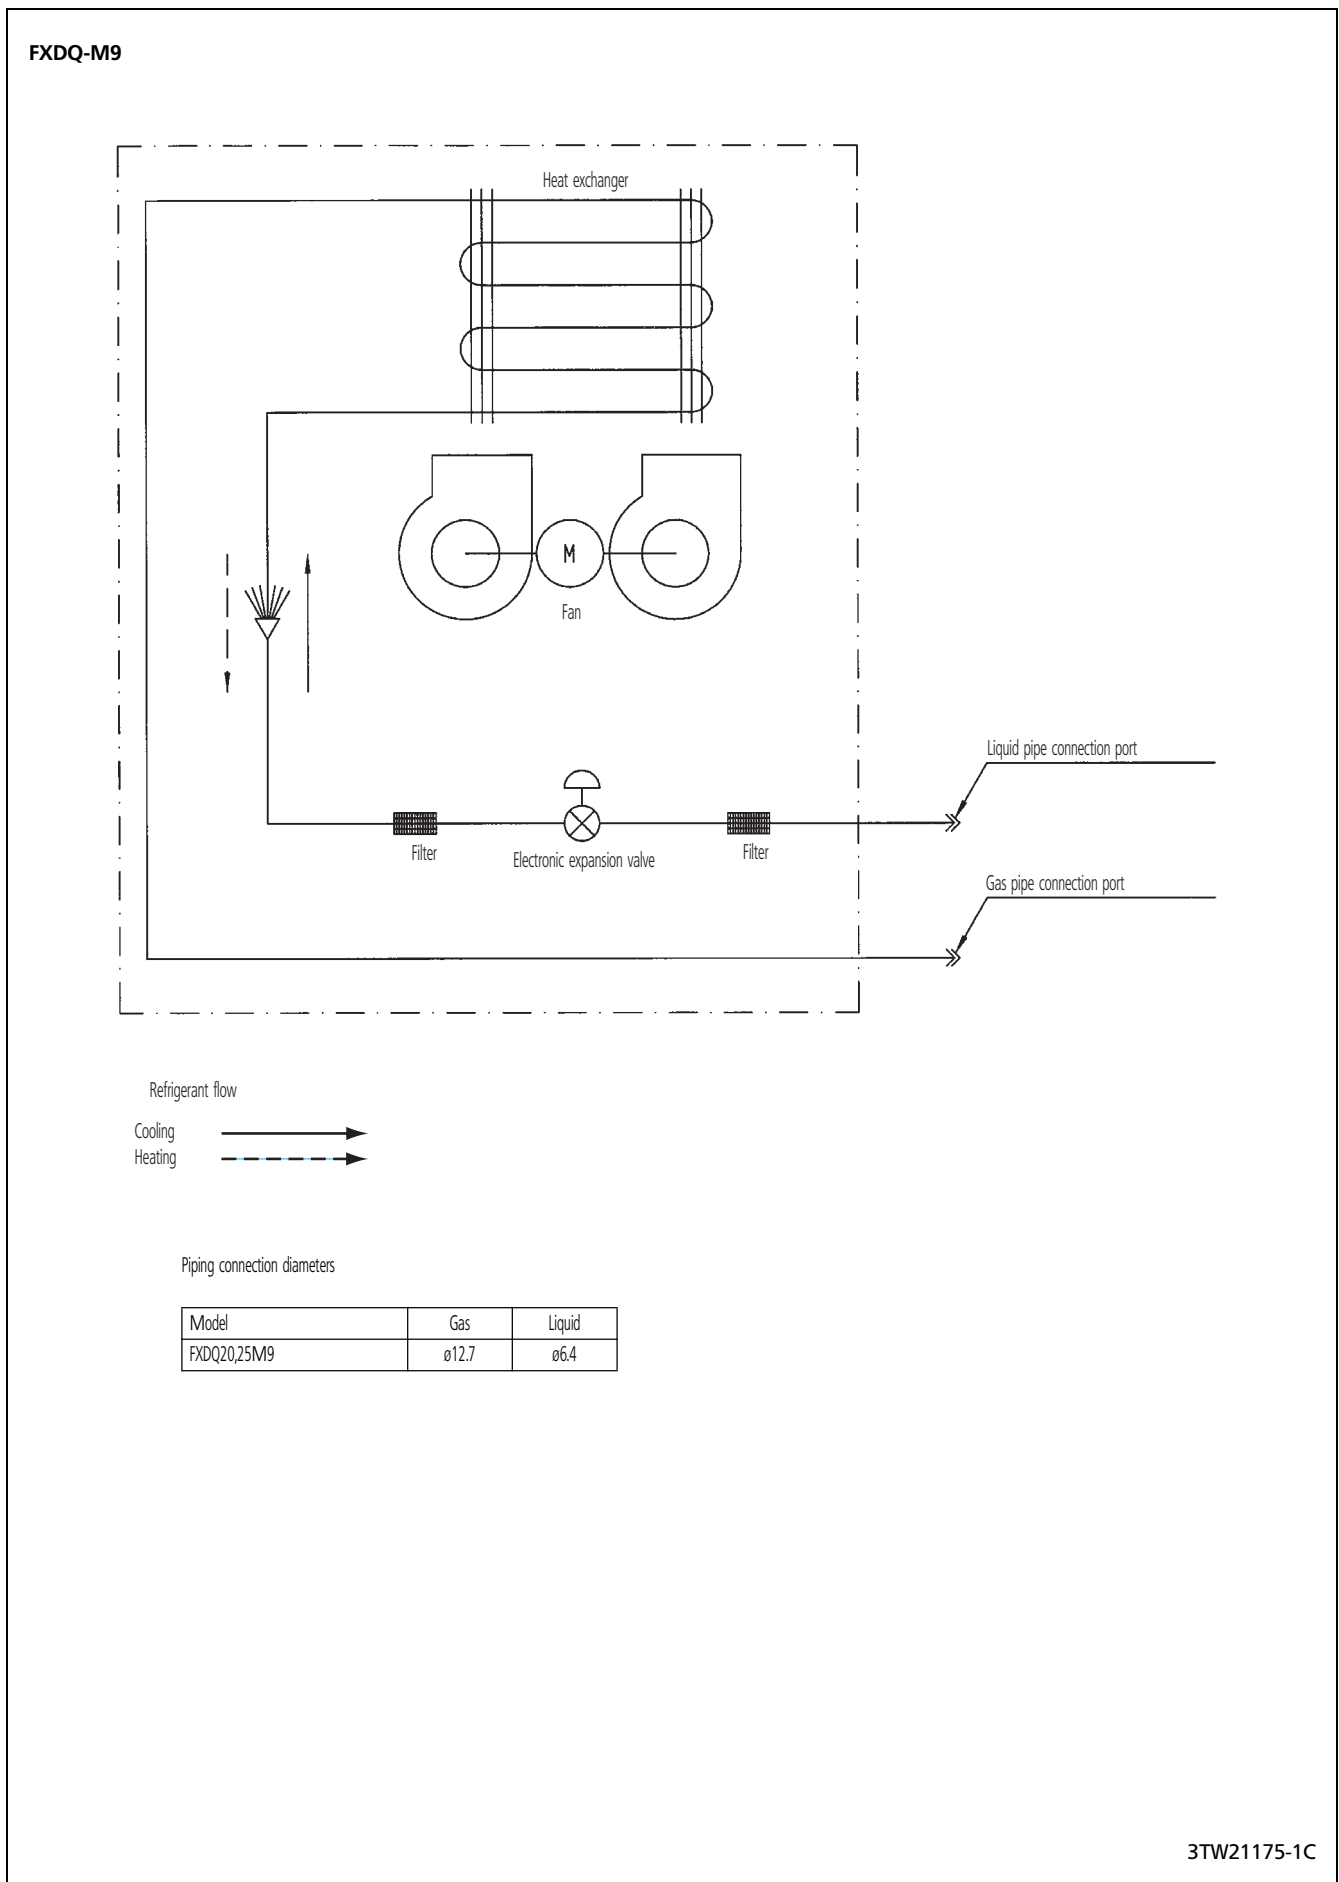


7 Wiring diagram

7 - 1 Wiring diagram

FXDQ-M9

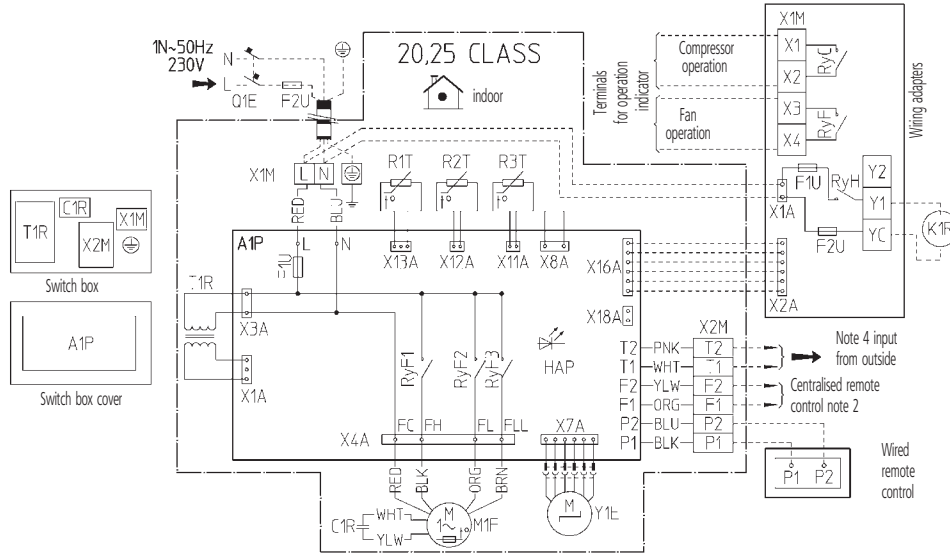

A1P	Printed circuit board	RyF1-3	Magnetic relay (Fan)	RyC, RyF	Magnetic relay
C1R	Capacitor (Fan)	T1R	Transformer (220-240V/22V)	RyH	Magnetic relay (J1EH)
F1U	Fuse (250V, 10A)	X1M	Terminal strip (Power)	F1U, F2U	Fuse (250V, 5A)
F2U	Field fuse	X2M	Terminal strip (Control)	X1A, X2A	Connector (Wiring adapter)
HAP	Light emitting diode (Service monitor-green)	Y1E	Electronic expansion valve	X1M	Terminal strip
M1F	Motor (Fan)	Optional parts			Connector for optional parts
Q1E	Earth leak detector	J1EH	Electric heater	X16A	Connector (Wiring adapter)
R1T	Thermistor (Air)	K1R	Magnetic relay (J1EH)	X18A	Connector (Wiring adapter for electrical appendices)
R2T, R3T	Thermistor (Refrigerant)	Wiring adapter			



COLORS : BLK : Black PNK : Pink
 BLU : Blue RED : Red
 BRN : Brown WHT : White
 ORG : Orange YLW : Yellow

NOTES


- 1 Use copper conductors only.
- 2 When using a centralised remote control, see manual for connection to the unit.
- 3 When installing the electric heater change the wiring for the heater circuit. The main power supply has to be supplied independently.
- 4 When connecting the input wires from the outdoor unit 'forced off' or 'on/off' operation can be selected by the remote control. For more details see installation manual.

2TW23666-1E

8 Sound data

8 - 1 Sound level data

FXDQ-M9



Model	Sound pressure level - 230V			Sound power level
	H	L	Measuring location	
FXDQ20M9	37	32		50
FXDQ25M9	37	32		50

NOTES

- 1 dBA = A-weighted sound pressure level (A-scale according to IEC).
- 2 Reference acoustic pressure 0 dB = 20 Pa.
- 3 These operating values were obtained using a power source of 230V/50Hz.
- 4 These operating values were obtained in a dead room (conversion values). Noise values will vary depending on a range of factors such as the construction of the particular room in which the equipment is installed.
- 5 Operating noise differs with operation and ambient conditions.

8 Sound data

8 - 2 Sound pressure spectrum

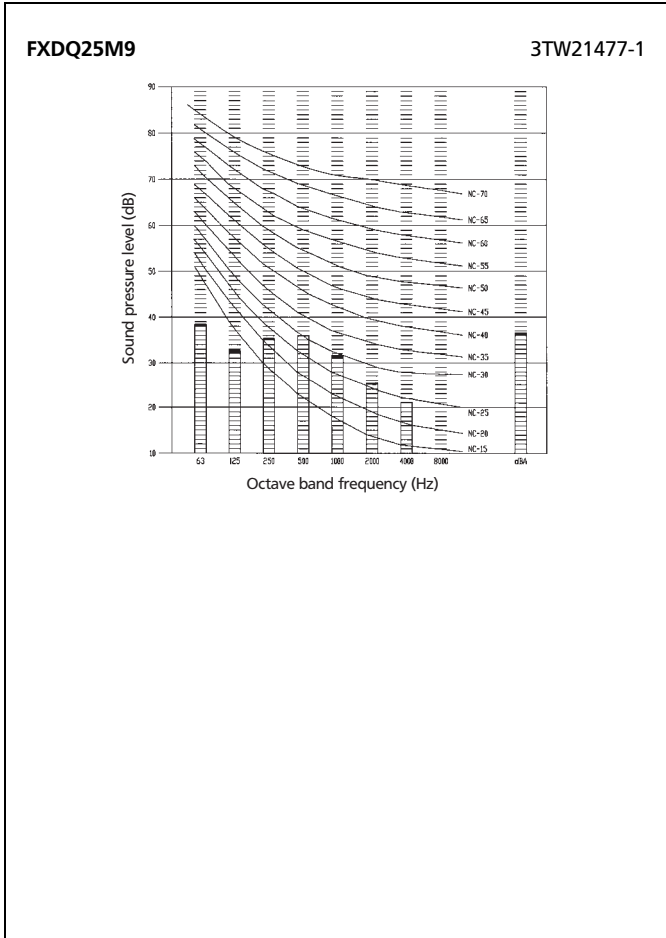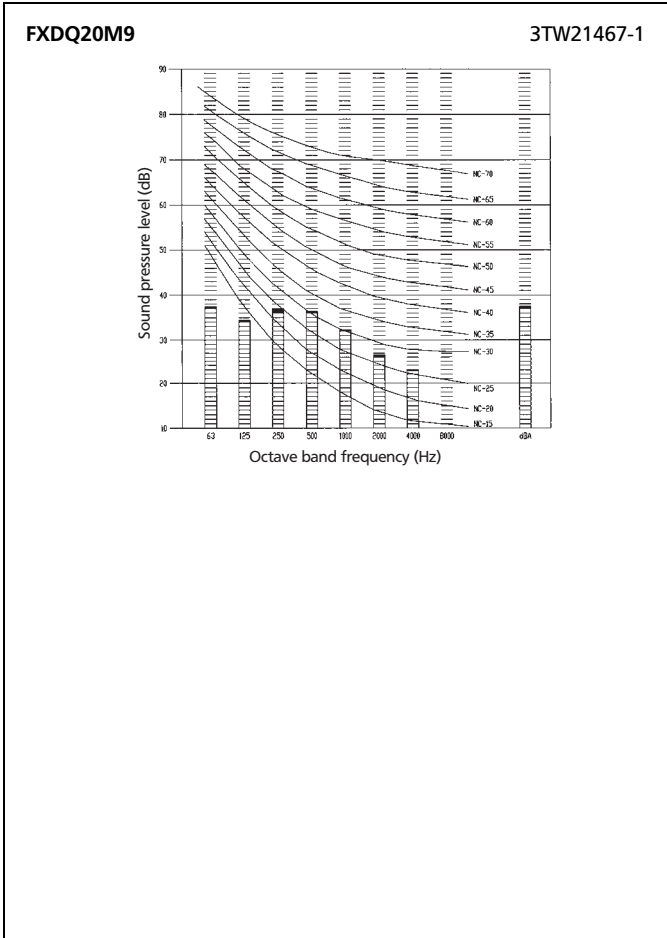



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.

VRV[®] products are not within the scope of the Eurovent certification programme.



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Daikin products are distributed by: