




Air Conditioning Technical Data

Small concealed ceiling unit

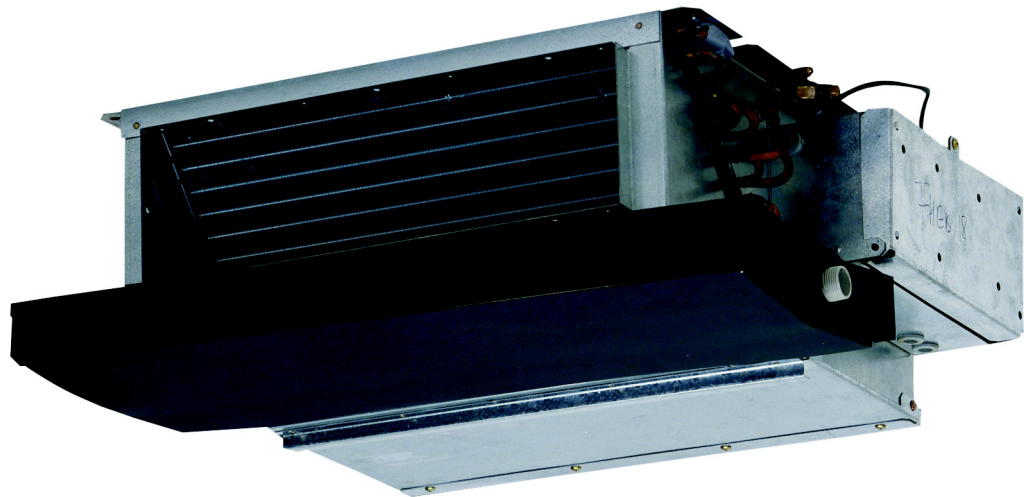

EEDEN12-204

FXDQ-M9

TABLE OF CONTENTS


FXDQ-M9

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	3
3	Safety device settings	5
	Safety Device Settings	5
4	Options	6
	Options	6
5	Capacity tables	7
	Cooling Capacity Tables	7
	Heating Capacity Tables	8
6	Dimensional drawings	9
	Dimensional Drawings	9
7	Piping diagrams	10
	Piping Diagrams	10
8	Wiring diagrams	11
	Wiring Diagrams - Single Phase	11
9	Sound data	12
	Sound Level Data	12
	Sound Pressure Spectrum	13

1 Features

- Designed for hotel bedrooms
- Compact dimensions (230mm high & 652mm deep), can easily be mounted in a ceiling void
- Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- Standard air filter removes airborne dust particles to ensure a steady supply of clean air
- The air suction direction can be altered from rear to bottom suction
- For easy mounting, the drain pan can be located to the left or right of the unit
- Allows multi tenant applications (option PCB required)

1

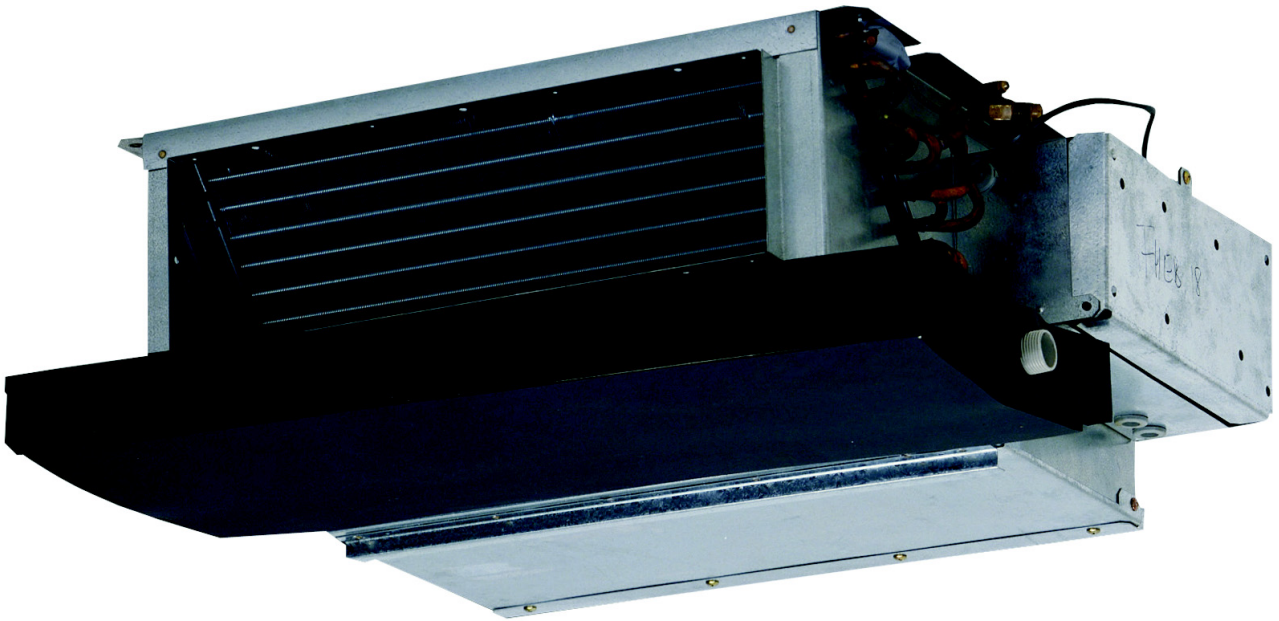

2 steps

optional

2 Specifications

2-1 Technical Specifications				FXDQ20M9		FXDQ25M9		
Cooling capacity	Nom.		kW	2.2 (1)		2.8 (1)		
Heating capacity	Nom.		kW	2.5 (2)		3.2 (2)		
Power input - 50Hz	Cooling	Nom.	kW	0.050 (1)				
	Heating	Nom.	kW	0.050 (2)				
Casing	Colour			Unpainted				
	Material			Galvanised steel				
Dimensions	Unit	Height	mm	230				
		Width	mm	502				
		Depth	mm	652				
	Packed unit	Height	mm	301				
		Width	mm	584				
		Depth	mm	753				
Required ceiling void >			mm	250				
Weight	Unit		kg	17				
	Packed unit		kg	18				
Heat exchanger	Length		mm	430				
	Rows	Quantity		2				
	Fin pitch		mm	1.4				
	Passes	Quantity		2				
	Face area		m ²	0.108				
	Stages	Quantity		12				
	Empty tubeplate hole	Quantity		4				0
	Tube type		ø7 Hi-XSS					
	Fin	Type		Symmetric waffle louvre				
		Treatment		Hydrophilic				
	Fan	Type			Sirocco fan			
Quantity			1					
Air flow rate - 50Hz		Cooling	High	m ³ /min	6.7		7.4	
			Low	m ³ /min	5.2		5.8	
Heating		High	m ³ /min	6.7		7.4		
	Low	m ³ /min	5.2		5.8			
Fan motor	Quantity			1				
	Model			Step motor				
	Speed	Steps		3				
	Output	High	W	10				
	Drive			Direct drive				
Sound power level	Cooling	Nom.	dBA	50				
Sound pressure level	Cooling	High	dBA	37				
		Low	dBA	32				
	Heating	High	dBA	37				
		Low	dBA	32				
Refrigerant	Type			R-410A				
	Control			Electronic expansion valve				
Piping connections	Liquid	Type		Flare connection				
		OD	mm	6.35				
	Gas	Type		Flare connection				
		OD	mm	12.7				
	Drain			I.D. 21.6, O.D. 27.2				
Temperature control			Microprocessor thermostat for cooling and heating					
Air direction control			Up and downwards					
Safety devices	Item	01	PC board fuse					
		02	Fan motor thermal protection					

2-2 Electrical Specifications				FXDQ20M9		FXDQ25M9	
Power supply	Name			V1			
	Phase			1~			
	Frequency		Hz	50			
	Voltage		V	230			

2 Specifications

2-2 Electrical Specifications			FXDQ20M9	FXDQ25M9
Voltage range	Min.	%		-10
	Max.	%		10
Current - 50Hz	Zmax	List	No requirements	
	Minimum circuit amps (MCA)		A	0.2
	Maximum fuse amps (MFA)		A	16
	Full load amps (FLA)	Total	A	0.1

Notes

- (1) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 8m; level difference: 0m
- (2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 8m; level difference: 0m
- (3) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.
- (4) Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
- (5) Maximum allowable voltage range variation between phases is 2%.
- (6) MCA/MFA: $MCA = 1.25 \times FLA$
- (7) $MFA < 4 \times FLA$
- (8) Next lower standard fuse rating minimum 16A
- (9) Select wire size based on the value of MCA
- (10) Instead of a fuse, use a circuit breaker

3 Safety device settings

3 - 1 Safety Device Settings

		FXDQ20M9	FXDQ25M9
FAN MOTOR THERMAL PROTECTOR	°C	OFF:135 ^{±8} , (ON:87 ^{±15})	
PC BOARD FUSE		250V 10A	

3TW25511-3

4 Options

4 - 1 Options

4

FXDQ20-25M9

Options

Nr.	Item
1	Wiring adapter (Hour meter)

Type	FXDQ20,25
	EKRP1B2 *1

Operation Control

Nr.	Item	
1	Remote	Wired type
		Wireless type
		H/P
		C/O
2	Simplified remote control	
3	Remote control for hotel use	
4	Adapter for wiring	
5.1	Wiring adapter for electrical appendices (1)	
5.2	Wiring adapter for electrical appendices (2)	
6	Remote sensor	
7	Installation box for adapter PCB	
8	Central remote control	
8.1	Electrical box with earth terminal (3 blocks)	
9	Unified ON/OFF controller	
9.1	Electrical box with earth terminal (2 blocks)	
9.2	Noise filter (For electromagnetic interface use only)	
10	Schedule timer	
11	External adapter for outdoor unit (installation on indoor unit)	
11	Multi Tenant option	

Type	FXDQ20,25
	BRC1D52 / BRC1E51A *4
	BRC4C62
	BRC4C64
	BRC2A51
	BRC3A61
	KRP1B61
	KRP2A51
	KRP4A51
	KRCS01-1

	DCS302C51
	KJB311A
	DCS301B51
	KJB212A
	KEK26-1A
	DST301B51
	DTA104A61
	EKMTAC *3

*1 Fixing box is KRP1A90

*2 All options are supplied as kit.

*3 This kit contains parts to connect with 10 multi tenant indoor units.

*4 Included languages are: English, German, French, Dutch, Spanish, Italian, Greek, Portuguese, Russian and Turkish.

Contents of accessory bags

Description	Quantity
Installation and operation manual	1
Glass tube fuse 10A	1
Service instruction label	1

3TW31579-1A

5 Capacity tables

5 - 1 Cooling Capacity Tables

FXDQ-M9

TC: Total Capacity (kW) ; SHC: Sensible heat capacity (kW)

Unit size	Out door °CDB	Indoor air temp.													
		14.0WB		16.0WB		18.0WB		19.0WB		20.0WB		22.0WB		24.0WB	
		20.0DB		23.0DB		26.0DB		27.0DB		28.0DB		30.0DB		32.0DB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
20	10,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,9	2,9	1,9
	12,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,9	2,9	1,9
	14,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,9	2,8	1,9
	16,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,9	2,8	1,8
	18,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,9	2,7	1,8
	20,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,9	2,7	1,8
	21,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,9	2,7	1,8
	23,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,9	2,6	1,7
	25,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,6	1,8	2,6	1,7
	27,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,5	1,8	2,6	1,7
	29,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,5	1,8	2,5	1,7
	31,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,4	1,8	2,5	1,7
	33,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,9	2,4	1,8	2,5	1,7
	35,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,8	2,4	1,8	2,4	1,7
	37,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,3	1,8	2,3	1,8	2,4	1,7
39,0	1,5	1,4	1,8	1,6	2,1	1,7	2,2	1,8	2,2	1,8	2,3	1,7	2,3	1,6	
25	10,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,4	2,3	3,7	2,3
	12,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,4	2,3	3,6	2,2
	14,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,4	2,3	3,6	2,2
	16,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,4	2,3	3,5	2,2
	18,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,4	2,3	3,5	2,2
	20,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,4	2,3	3,4	2,1
	21,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,4	2,3	3,4	2,1
	23,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,3	2,2	3,4	2,1
	25,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,3	2,2	3,3	2,1
	27,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,2	2,2	3,3	2,1
	29,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,2	2,2	3,2	2,0
	31,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,1	2,1	3,2	2,0
	33,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,1	2,1	3,1	2,0
	35,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	3,0	2,2	3,0	2,1	3,1	2,0
	37,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	2,9	2,2	3,0	2,1	3,0	2,0
39,0	1,9	1,6	2,3	1,8	2,6	2,0	2,8	2,1	2,9	2,2	2,9	2,1	3,0	2,0	

3TW25772-1A

5 Capacity tables

5 - 2 Heating Capacity Tables

5

FXDQ-M9



Unit Size	Nominal capacity	Outdoor air temperature		Indoor air temperature °CDB													
				16.0		18.0		20.0		21.0		22.0		24.0			
		°CDB	°CWB	kW		kW		kW		kW		kW		kW			
20	2.5	-19.8	-20.0	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
		-18.8	-19.0	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
		-16.7	-17.0	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
		-14.7	-15.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		-12.6	-13.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
		-10.5	-11.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		-9.5	-10.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		-8.5	-9.1	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
		-7.0	-7.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
		-5.0	-5.6	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		-3.0	-3.7	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
		0.0	-0.7	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		3.0	2.2	2.5	2.5	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
		5.0	4.1	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
		7.0	6.0	2.6	2.6	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
		9.0	7.9	2.7	2.7	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
		11.0	9.8	2.8	2.7	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
13.0	11.8	2.8	2.7	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5		
15.0	13.7	2.8	2.7	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5		
25	3.2	-19.8	-20.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	
		-18.8	-19.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	
		-16.7	-17.0	2.1	2.1	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
		-14.7	-15.0	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	
		-12.6	-13.0	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	
		-10.5	-11.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	
		-9.5	-10.0	2.5	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	
		-8.5	-9.1	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	
		-7.0	-7.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	
		-5.0	-5.6	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	
		-3.0	-3.7	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	
		0.0	-0.7	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	
		3.0	2.2	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	
		5.0	4.1	3.3	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
		7.0	6.0	3.4	3.4	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
		9.0	7.9	3.5	3.4	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
		11.0	9.8	3.6	3.4	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
13.0	11.8	3.6	3.4	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2			
15.0	13.7	3.6	3.4	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2			

3TW25512-2B


6 Dimensional drawings

6 - 1 Dimensional Drawings

FXDQ-M9

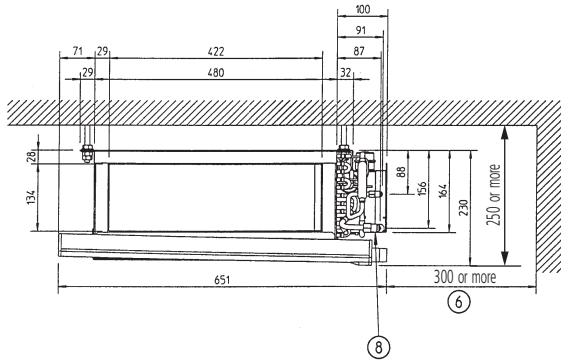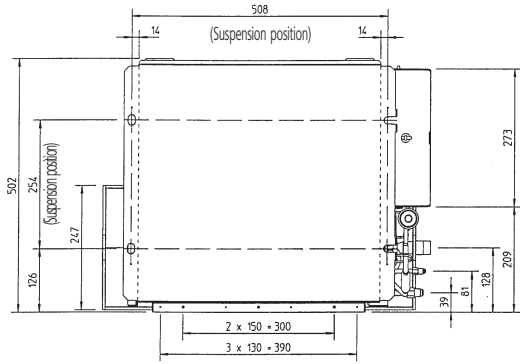

Nr	Part name
1	Liquid pipe connection (ø 6.35)
2	Gas pipe connection (ø 12.7)
3	Drain hole (o.d. ø 27.2 - i.d. ø 21.6)
4	Transmission wiring port
5	Power supply wiring port
6	Service space
7	Switch box
8	Nameplate

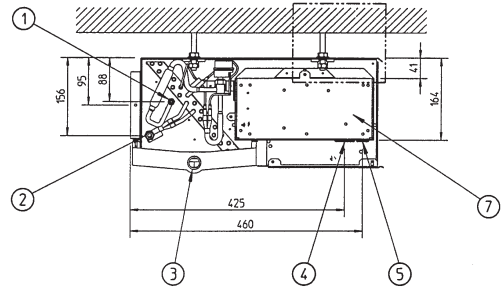


3TW25774-1

7 Piping diagrams


7 - 1 Piping Diagrams

7

FXDQ-M9

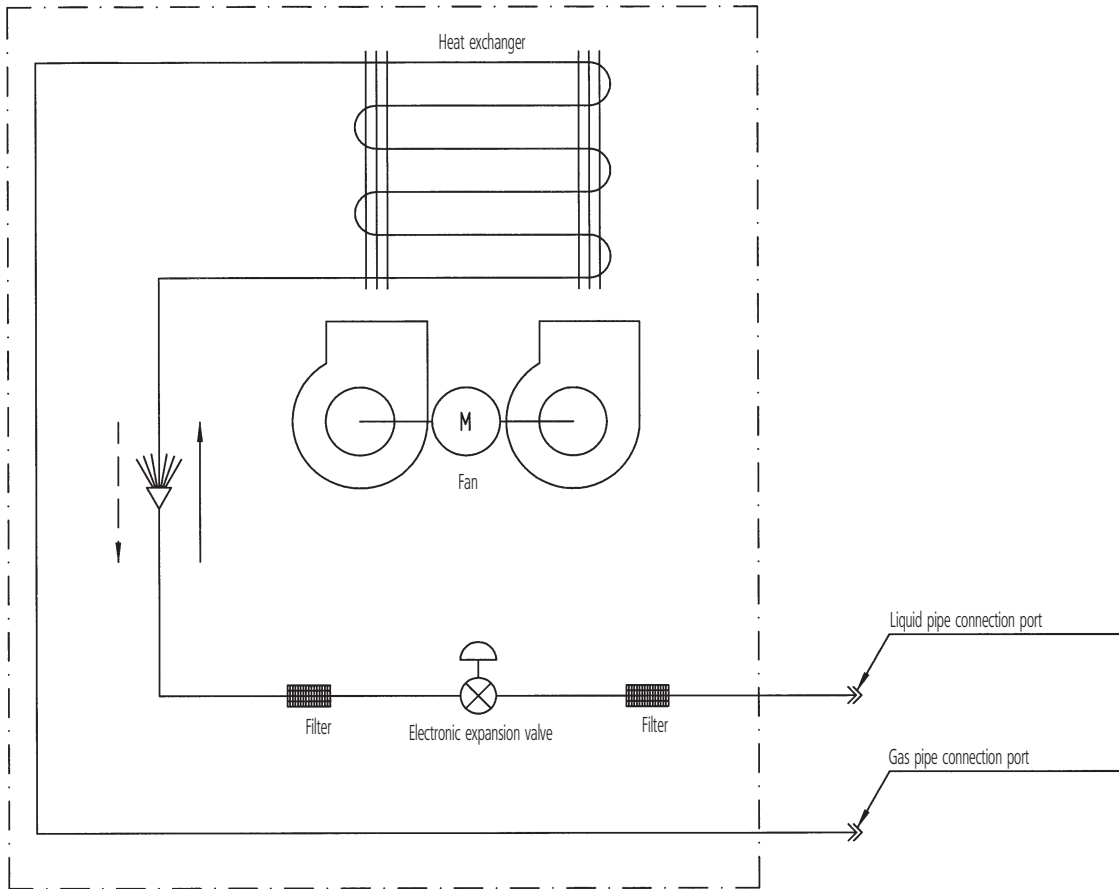

Refrigerant flow



Piping connection diameters


Model	Gas	Liquid
FXDQ20,25M9	ø12.7	ø6.4

3TW21175-1C

8 Wiring diagrams

8 - 1 Wiring Diagrams - Single Phase

FXDQ-M9

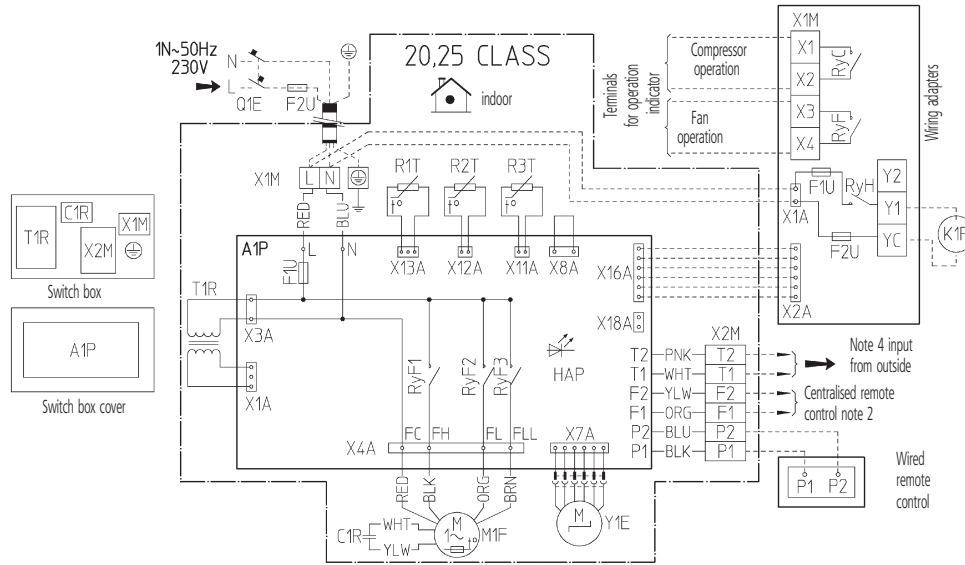

A1P	Printed circuit board	RyF1-3	Magnetic relay (Fan)	RyC, RyF	Magnetic relay
C1R	Capacitor (Fan)	T1R	Transformer (220-240V/22V)	RyH	Magnetic relay (J1EH)
F1U	Fuse (250V, 10A)	X1M	Terminal strip (Power)	F1U, F2U	Fuse (250V, 5A)
F2U	Field fuse	X2M	Terminal strip (Control)	X1A, X2A	Connector (Wiring adapter)
HAP	Light emitting diode (Service monitor-green)	Y1E	Electronic expansion valve	X1M	Terminal strip
M1F	Motor (Fan)	Optional parts		Connector for optional parts	
Q1E	Earth leak detector	J1EH	Electric heater	X16A	Connector (Wiring adapter)
R1T	Thermistor (Air)	K1R	Magnetic relay (J1EH)	X18A	Connector (Wiring adapter for electrical appendices)
R2T, R3T	Thermistor (Refrigerant)	Wiring adapter			

: Field wiring
 L : Live
 N : Neutral
 : Connector
 : Wire clamp
 : Protective earth (screw)

COLORS : BLK : Black PNK : Pink
 BLU : Blue RED : Red
 BRN : Brown WHT : White
 ORG : Orange YLW : Yellow

NOTES


- Use copper conductors only.
- When using a centralised remote control, see manual for connection to the unit.
- When installing the electric heater change the wiring for the heater circuit. The main power supply has to be supplied independently.
- When connecting the input wires from the outdoor unit 'forced off' or 'on/off' operation can be selected by the remote control. For more details see installation manual.

2TW23666-1E

9 Sound data

9 - 1 Sound Level Data

FXDQ-M9



Model	Sound pressure level - 230V		Measuring location 	Sound power level
	H	L		
FXDQ20M9	37	32		50
FXDQ25M9	37	32		50

NOTES

- 1 dBA = A-weighted sound pressure level (A-scale according to IEC).
- 2 Reference acoustic pressure 0 dB = 20 Pa.
- 3 These operating values were obtained using a power source of 230V/50Hz.
- 4 These operating values were obtained in a dead room (conversion values). Noise values will vary depending on a range of factors such as the construction of the particular room in which the equipment is installed.
- 5 Operating noise differs with operation and ambient conditions.

9 Sound data

9 - 2 Sound Pressure Spectrum

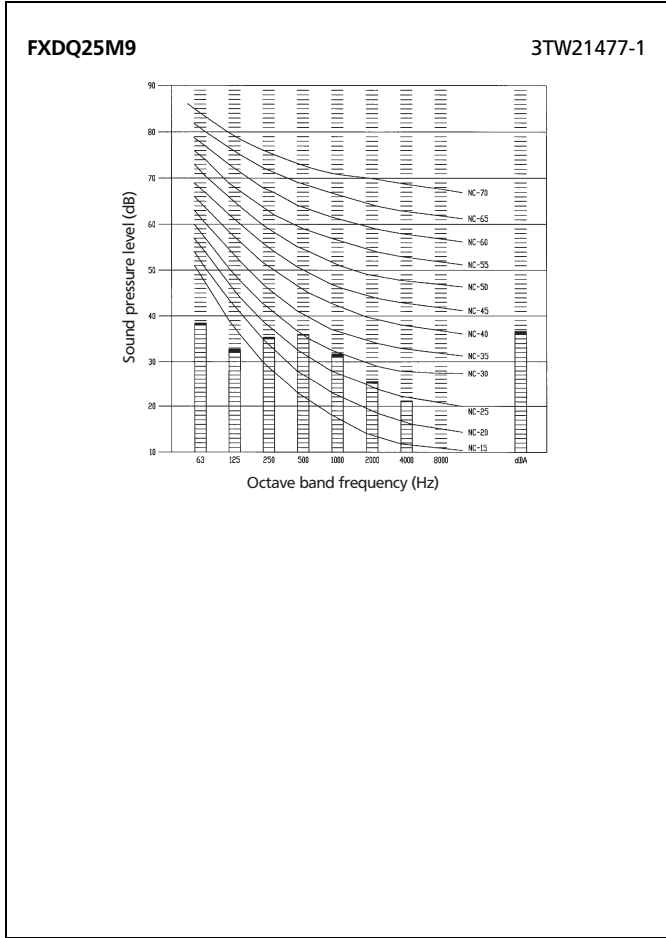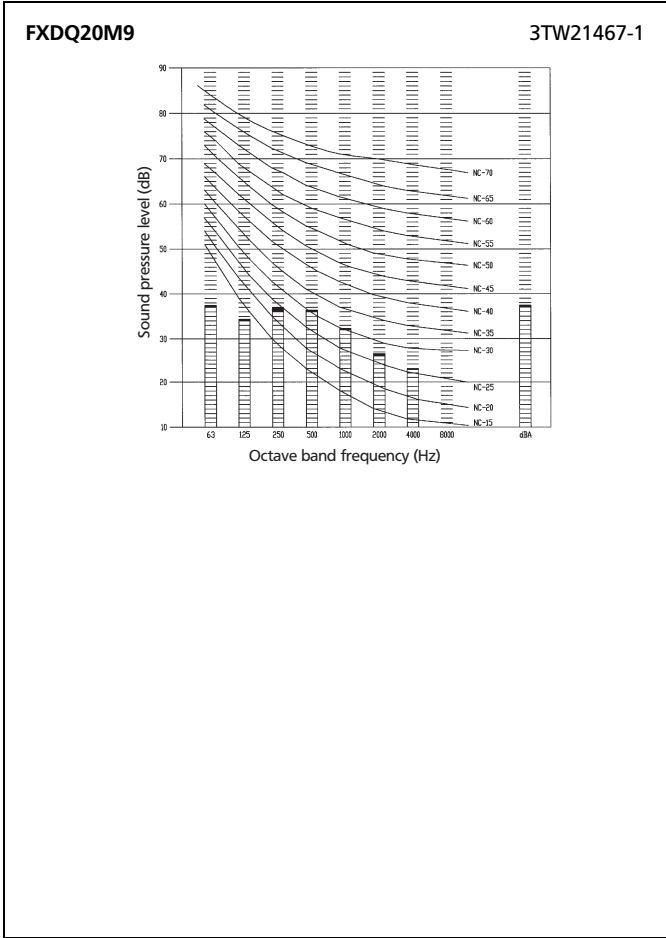



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

BARCODE

Daikin products are distributed by:

