



# Air Conditioning Technical Data

Slim concealed ceiling unit



EEDEN12-204

FXDQ-P7



# TABLE OF CONTENTS

## FXDQ-P7

1	Features .....	2
2	Specifications .....	3
	Technical Specifications .....	3
	Electrical Specifications .....	4
3	Electrical data .....	5
	Electrical Data .....	5
4	Safety device settings .....	6
	Safety Device Settings .....	6
5	Options .....	7
	Options .....	7
6	Capacity tables .....	8
	Cooling Capacity Tables .....	8
	Heating Capacity Tables .....	10
7	Dimensional drawings .....	12
	Dimensional Drawings .....	12
8	Centre of gravity .....	14
	Centre of Gravity .....	14
9	Piping diagrams .....	16
	Piping Diagrams .....	16
10	Wiring diagrams .....	17
	Wiring Diagrams - Single Phase .....	17
11	Sound data .....	18
	Sound Pressure Spectrum .....	18
12	Fan characteristics .....	20
	Fan Characteristics .....	20

# 1 Features

- Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- Medium external static pressure facilitates unit use with flexible ducts of varying lengths
- Standard air filter removes airborne dust particles to ensure a steady supply of clean air
- Standard drain pump with 750mm lift
- Allows multi tenant applications (option PCB required)

1



3 steps



optional



standard

## 2 Specifications

2-1 Technical Specifications				FXDQ15P7	FXDQ20P7	FXDQ25P7	FXDQ32P7	FXDQ40P7	FXDQ50P7	FXDQ63P7	
Cooling capacity	Nom.		kW	1.7 (1)	2.2 (1)	2.8 (1)	3.6 (1)	4.5 (1)	5.6 (1)	7.1 (1)	
Heating capacity	Nom.		kW	1.9 (2)	2.5 (2)	3.2 (2)	4.0 (2)	5.0 (2)	6.3 (2)	8.0 (2)	
Power input - 50Hz	Cooling	Nom.	kW	0.086			0.089	0.160	0.165	0.181	
	Heating	Nom.	kW	0.067			0.070	0.147	0.152	0.168	
Power input - 60Hz	Cooling	Nom.	kW	0.092			0.095	0.182	0.185	0.192	
	Heating	Nom.	kW	0.073			0.076	0.168	0.170	0.179	
Casing	Material			Unpainted galvanised steel							
Dimensions	Unit	Height	mm	200							
		Width	mm	700			900		1,100		
		Depth	mm	620							
	Packed unit	Height	mm	260							
		Width	mm	944			1,144		1,344		
		Depth	mm	785							
Required ceiling void >				mm 240							
Weight	Unit			kg 23			27	28	31		
	Packed unit			kg 31			35	36	40		
Heat exchanger	Length			mm 500			700		900		
	Rows	Quantity		2			3				
	Fin pitch			mm 1.5							
	Passes	Quantity		3			6				
	Face area			m <sup>2</sup> 0.126			0.176		0.227		
	Stages	Quantity		12							
	Empty tubeplate hole	Quantity		0			4	0			
	Tube type	ø7 Hi-XSS									
	Fin	Type	Symmetric waffle louvre								
		Treatment	Hydrophilic								
Fan	Type	Sirocco fan									
	Quantity	1									
	Air flow rate - 50Hz	Cooling	High	m <sup>3</sup> /min	7.5	8.0		10.5	12.5	16.5	
			Nom.	m <sup>3</sup> /min	7.0	7.2		9.5	11.0	14.5	
			Low	m <sup>3</sup> /min	6.4			8.5	10.0	13.0	
	Air flow rate - 60Hz	Cooling	High	m <sup>3</sup> /min	7.5	8.0		10.5	12.5	16.5	
			Nom.	m <sup>3</sup> /min	7.0	7.2		9.5	11.0	14.5	
			Low	m <sup>3</sup> /min	6.4			8.5	10.0	13.0	
	External static pressure - 50Hz	High	Pa		30			44			
		Nom.	Pa		10			15			
External static pressure - 60Hz	High	Pa		30			44				
	Nom.	Pa		10			15				
Fan motor	Quantity	1									
	Output	High	W	62				130			
	Drive	Direct drive									
Sound power level	Cooling	Nom.	dBA	50	51		52	53	54		
Sound pressure level	Cooling	High	dBA	32	33		34	35	36		
		Nom.	dBA	31			32	33	34		
		Low	dBA	29			30	31	32		
Refrigerant	Type	R-410A									
	Control	Electronic expansion valve									
Piping connections	Liquid	Type	Flare connection								
		OD	mm	6.35					9.52		
	Gas	Type	Flare connection								
		OD	mm	12.7					15.9		
	Drain	VP20 (I.D. 20/O.D. 26)									
Heat insulation	Both liquid and gas pipes										
Air filter	Type	Removable / washable / mildew proof									
Drain-up height				mm 600							
Safety devices	Item	01			Fuse						
		02			Fan motor thermal protection						

## 2 Specifications

2

2-2 Electrical Specifications				FXDQ15P7	FXDQ20P7	FXDQ25P7	FXDQ32P7	FXDQ40P7	FXDQ50P7	FXDQ63P7	
Power supply	Name		VE								
	Phase		1~								
	Frequency	Hz	50/60								
	Voltage	V	220-240/220								
Voltage range	Min.	%	-10								
	Max.	%	10								
Current - 50Hz	Minimum circuit amps (MCA)		A	0.8			1.0		1.1		
	Maximum fuse amps (MFA)		A	16							
	Full load amps (FLA)	Total	A	0.6			0.8		0.9		
Current - 60Hz	Minimum circuit amps (MCA)		A	0.9			1.1	1.3	1.4		
	Maximum fuse amps (MFA)		A	16							
	Full load amps (FLA)	Total	A	0.7			0.9	1.0	1.1		

### Notes

- (1) Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB; equivalent piping length: 5m; level difference: 0m
- (2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m; level difference: 0m
- (3) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.
- (4) External static pressure is changeable to set by the remote control (from standard to high, see installation manual)
- (5) Operation sound levels are conversion values in anechoic chamber. In practice, sound levels tend to be higher than the specified values due to ambient noise or reflection. When the suction place is changed to bottom suction, sound level will increase by approximately 5dBA.
- (6) PED unit category: Art3§3: excluded from scope of PED due to article 1, item 3.6 of 97/23/EC
- (7) Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
- (8) Maximum allowable voltage range variation between phases is 2%.
- (9) MCA/MFA:  $MCA = 1.25 \times FLA$
- (10)  $MFA \leq 4 \times FLA$
- (11) Next lower standard fuse rating minimum 15A
- (12) Select wire size based on the value of MCA
- (13) Instead of a fuse, use a circuit breaker

### 3 Electrical data

#### 3 - 1 Electrical Data

##### FXDQ-P7

Model	Power supply					IFM		Input (W)	
	Hz	Volts	Voltage range	MCA	MFA	kW	FLA	Cooling	Heating
FXDQ15P7	50	220-240V	Max. 264V Min. 198V	0,8	16	0,062	0,6	86	67
FXDQ20P7				0,8		0,062	0,6	86	67
FXDQ25P7				0,8		0,062	0,6	86	67
FXDQ32P7				0,8		0,062	0,6	89	70
FXDQ40P7				1,0		0,062	0,8	160	147
FXDQ50P7				1,0		0,13	0,8	165	152
FXDQ60P7				1,1		0,13	0,9	181	168
FXDQ15P7	60	220V	Max. 242V Min. 198V	0,9	16	0,062	0,7	92	73
FXDQ20P7				0,9		0,062	0,7	92	73
FXDQ25P7				0,9		0,062	0,7	92	73
FXDQ32P7				0,9		0,062	0,7	95	76
FXDQ40P7				1,1		0,062	0,9	182	168
FXDQ50P7				1,3		0,13	1,0	185	170
FXDQ63P7				1,4		0,13	1,1	192	179

##### SYMBOLS

- MCA : Min. Circuit Amps. (A)
- MFA : Max. Fuse Amps. (See note 5)
- kW : Fan Motor Rated Output (kW)
- FLA : Full Load Amps. (A)
- IFM : Indoor Fan Motor

##### NOTES

1. Voltage range  
Units are suitable for use on electrical systems where voltage supplied to unit terminals is not below or above listed range limits.
2. Maximum allowable voltage unbalance between phases is 2%.
3. MCA/MFA  
MCA = 1,25 x FLA  
MFA ≤ 4 x FLA  
(Next lower standard fuse rating. Min. 15A)
4. Select wire size based on the MCA.
5. Instead of fuse, use circuit breaker.

4TW32901-4

## 4 Safety device settings

### 4 - 1 Safety Device Settings

4

FXDQ-P7

	Safety devices	
	PC board (A1P) fuse	Fan motor thermal protector
FXDQ15P7	250V 5A	OFF: 130±5°C OFF ON: 83±15°C ON
FXDQ20P7		
FXDQ25P7		
FXDQ32P7		
FXDQ40P7		
FXDQ50P7		
FXDQ63P7		

4TW32901-2



# 5 Options

## 5 - 1 Options

### FXDQ-P7

Kit name		Model		
		FXDQ15P7 FXDQ20P7 FXDQ25P7 FXDQ32P7	FXDQ40P7 FXDQ50P7	FXDQ63P7
Wired remote control		BRC1D52 / BRC1D61 (1) / BRC1E51A *2 / BRC1E52A *3 / BRC1E52B *4		
Infrared remote control	H/P	BRC4C65		
	C/O	BRC4C66		
Simplified remote control		BRC2C51		
Remote control for hotel use		BRC3A61		
Central remote control		DCS302CA51 / DCS302CA61 (1)		
Unified on/off control		DCS301BA51 / DCS301BA61 (1)		
Schedule timer		DST301BA51 / DST301BA61 (1)		
Residential wired remote control		DCS303A51 (1) (5)		
Adapter for wiring		KRP1B56		
Wiring adapter for electrical appendices 1		KRP2A53		
Wiring adapter for electrical appendices 2		KRP4A54		
Remote sensor		KRCS01-1B		
Installation box for adaptor PCB		KRP1BA101		
Electrical box with earth terminal	2 blocks	KJB212AA		
	3 blocks	KJB311AA		
Noise filter (for electromagnetic interface use only)		KEK26-1A		
External control adapter for outdoor unit (must be installed on indoor units)		DTA104A53		
Multi tenant		EKMTAC		
Insulation kit for high humidity		KDT25N32	KDT25N50	KDT25N63

#### NOTES

- (1) For DAME only
- \*2 Included languages are: English, German, French, Dutch, Spanish, Italian, Greek, Portuguese, Russian and Turkish.
- \*3 Included languages are: English, German, French, Dutch, Spanish, Italian, Greek, Portuguese, Russian, Turkish and Polish.
- \*4 Included languages are: English, German, Albanian, Bulgarian, Croatian, Czech, Hungarian, Romanian, Serbian, Slovak and Slovenian.
- (5) For residential use only. Cannot be used with other centralised control equipment.

4TW32909-1A

# 6 Capacity tables

## 6 - 1 Cooling Capacity Tables

FXDQ-P7

TC: Total Capacity (kW) ; SHC: Sensible heat capacity (kW)

Unit size	Out door °CDB	Indoor air temp.													
		14.0WB		16.0WB		18.0WB		19.0WB		20.0WB		22.0WB		24.0WB	
		20.0DB	23.0DB	23.0DB	26.0DB	26.0DB	27.0DB	27.0DB	28.0DB	28.0DB	30.0DB	30.0DB	32.0DB	32.0DB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
15	10.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.2	1.5
	12.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.2	1.5
	14.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.2	1.5
	16.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.1	1.5
	18.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.1	1.5
	20.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.1	1.5
	21.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.1	1.5
	23.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.0	1.4
	25.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.0	1.4
	27.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	1.9	1.4	2.0	1.4
	29.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	1.9	1.4	2.0	1.4
	31.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	1.9	1.4	1.9	1.4
	33.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	1.9	1.4	1.9	1.4
	35.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.4	1.8	1.4	1.9	1.4
37.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.4	1.8	1.4	1.8	1.3	
39.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.7	1.4	1.8	1.3	1.8	1.3	
20	10.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.9	2.0
	12.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.9	2.0
	14.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.8	1.9
	16.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.8	1.9
	18.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.7	1.9
	20.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.7	1.9
	21.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.7	1.9
	23.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.6	1.9
	25.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.6	1.9
	27.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.5	1.8	2.6	1.9
	29.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.5	1.8	2.5	1.8
	31.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.4	1.7	2.5	1.8
	33.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.4	1.7	2.5	1.8
	35.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.4	1.7	2.4	1.8
37.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.3	1.7	2.4	1.8	
39.0	1.5	1.4	1.8	1.6	2.1	1.8	2.1	1.9	2.2	1.9	2.3	1.6	2.3	1.8	
25	10.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.7	2.3
	12.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.6	2.2
	14.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.6	2.2
	16.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.5	2.2
	18.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.5	2.2
	20.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.4	2.2
	21.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.4	2.2
	23.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.3	2.2	3.4	2.1
	25.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.3	2.2	3.3	2.1
	27.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.2	2.2	3.3	2.1
	29.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.2	2.1	3.2	2.1
	31.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.1	2.1	3.2	2.1
	33.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.1	2.1	3.1	2.1
	35.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.0	2.1	3.1	2.0
37.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	2.9	2.2	3.0	2.0	3.0	2.0	
39.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	2.9	2.1	2.9	2.0	3.0	2.0	
32	10.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.3	2.8	4.7	2.9
	12.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.3	2.8	4.7	2.9
	14.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.3	2.8	4.6	2.8
	16.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.3	2.8	4.6	2.8
	18.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.3	2.8	4.5	2.8
	20.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.3	2.8	4.4	2.8
	21.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.3	2.8	4.4	2.7
	23.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.2	2.8	4.3	2.7
	25.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.2	2.7	4.3	2.7
	27.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.1	2.7	4.2	2.7
	29.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.1	2.7	4.2	2.6
	31.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	4.0	2.6	4.1	2.6
	33.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	3.9	2.6	4.0	2.6
	35.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.8	2.6	3.9	2.5	4.0	2.5
37.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.7	2.5	3.8	2.5	3.9	2.5	
39.0	2.4	1.9	2.9	2.2	3.4	2.4	3.6	2.6	3.7	2.5	3.8	2.5	3.8	2.5	

3TW32902-4A

# 6 Capacity tables

## 6 - 1 Cooling Capacity Tables

FXDQ-P7

TC: Total Capacity (kW) ; SHC: Sensible heat capacity (kW)

Unit size	Out door °CDB	Indoor air temp.													
		14.0WB		16.0WB		18.0WB		19.0WB		20.0WB		22.0WB		24.0WB	
		20.0DB		23.0DB		26.0DB		27.0DB		28.0DB		30.0DB		32.0DB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
40	10,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,4	3,3	5,9	3,5
	12,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,4	3,3	5,8	3,5
	14,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,4	3,3	5,8	3,5
	16,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,4	3,3	5,7	3,5
	18,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,4	3,3	5,6	3,4
	20,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,4	3,3	5,5	3,4
	21,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,4	3,3	5,5	3,4
	23,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,3	3,3	5,4	3,3
	25,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,2	3,3	5,3	3,3
	27,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,2	3,2	5,3	3,3
	29,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,1	3,2	5,2	3,3
	31,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	5,0	3,2	5,1	3,2
	33,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,8	3,2	4,9	3,2	5,0	3,2
	35,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,7	3,2	4,9	3,1	5,0	3,2
	37,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,7	3,2	4,8	3,1	4,9	3,1
39,0	3,0	2,5	3,6	2,8	4,2	3,3	4,5	3,3	4,6	3,2	4,7	3,1	4,8	3,1	
50	10,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,7	4,2	7,4	4,1
	12,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,7	4,2	7,3	4,1
	14,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,7	4,2	7,2	4,1
	16,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,7	4,2	7,1	4,0
	18,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,7	4,2	7,0	4,0
	20,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,7	4,2	6,9	4,0
	21,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,7	4,2	6,8	4,0
	23,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,6	4,2	6,7	3,9
	25,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,5	4,1	6,6	3,9
	27,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,4	4,1	6,6	3,9
	29,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,3	4,0	6,5	3,8
	31,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,2	4,0	6,4	3,8
	33,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	6,0	4,0	6,1	4,0	6,3	3,8
	35,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	5,9	4,0	6,0	3,9	6,2	3,7
	37,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	5,8	4,0	5,9	3,9	6,1	3,7
39,0	3,8	3,1	4,5	3,5	5,2	3,9	5,6	4,0	5,7	3,9	5,8	3,9	6,0	3,7	
63	10,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,5	5,1	9,3	5,7
	12,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,5	5,1	9,2	5,6
	14,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,5	5,1	9,1	5,5
	16,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,5	5,1	9,0	5,4
	18,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,5	5,1	8,8	5,4
	20,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,5	5,1	8,7	5,3
	21,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,5	5,1	8,7	5,3
	23,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,4	5,1	8,5	5,2
	25,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,3	5,0	8,4	5,1
	27,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,1	5,0	8,3	5,1
	29,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	8,0	4,9	8,2	5,0
	31,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	7,9	4,9	8,1	4,9
	33,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,6	4,9	7,8	4,8	7,9	4,9
	35,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,5	4,8	7,7	4,8	7,8	4,8
	37,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,4	4,8	7,5	4,7	7,7	4,8
39,0	4,8	3,8	5,7	4,3	6,6	4,8	7,1	4,9	7,2	4,7	7,4	4,7	7,6	4,7	

3TW32902-4A

# 6 Capacity tables

## 6 - 2 Heating Capacity Tables

6

FXDQ15-63P7

Unit size	Outdoor air temp.		On coil temp.: °C DB					
			16.0	18.0	20.0	21.0	22.0	24.0
	°CDB	°CWB	kW	kW	kW	kW	kW	kW
15	-19.8	-20.0	1.1	1.1	1.1	1.1	1.1	1.1
	-18.8	-19.0	1.2	1.2	1.1	1.1	1.1	1.1
	-16.7	-17.0	1.2	1.2	1.2	1.2	1.2	1.2
	-13.7	-15.0	1.3	1.3	1.3	1.3	1.3	1.3
	-11.8	-13.0	1.4	1.4	1.3	1.3	1.3	1.3
	-9.8	-11.0	1.4	1.4	1.4	1.4	1.4	1.4
	-9.5	-10.0	1.5	1.5	1.5	1.4	1.4	1.4
	-8.5	-9.1	1.5	1.5	1.5	1.5	1.5	1.5
	-7.0	-7.6	1.5	1.5	1.5	1.5	1.5	1.5
	-5.0	-5.6	1.6	1.6	1.6	1.6	1.6	1.6
	-3.0	-3.7	1.7	1.7	1.7	1.7	1.7	1.7
	0.0	-0.7	1.8	1.8	1.8	1.8	1.8	1.8
	3.0	2.2	1.9	1.9	1.9	1.8	1.8	1.7
	5.0	4.1	1.9	1.9	1.9	1.8	1.8	1.7
	7.0	6.0	2.0	2.0	1.9	1.8	1.8	1.7
	9.0	7.9	2.1	2.0	1.9	1.8	1.8	1.7
11.0	9.8	2.1	2.0	1.9	1.8	1.8	1.7	
13.0	11.8	2.1	2.0	1.9	1.8	1.8	1.7	
15.0	13.7	2.1	2.0	1.9	1.8	1.8	1.7	
20	-19.8	-20.0	1.5	1.5	1.5	1.5	1.5	1.5
	-18.8	-19.0	1.5	1.5	1.5	1.5	1.5	1.5
	-16.7	-17.0	1.6	1.6	1.6	1.6	1.6	1.6
	-13.7	-15.0	1.7	1.7	1.7	1.7	1.7	1.7
	-11.8	-13.0	1.8	1.8	1.8	1.8	1.8	1.8
	-9.8	-11.0	1.9	1.9	1.9	1.9	1.9	1.9
	-9.5	-10.0	1.9	1.9	1.9	1.9	1.9	1.9
	-8.5	-9.1	2.0	2.0	1.9	1.9	1.9	1.9
	-7.0	-7.6	2.0	2.0	2.0	2.0	2.0	2.0
	-5.0	-5.6	2.1	2.1	2.1	2.1	2.1	2.1
	-3.0	-3.7	2.2	2.2	2.2	2.2	2.2	2.2
	0.0	-0.7	2.3	2.3	2.3	2.3	2.3	2.2
	3.0	2.2	2.5	2.5	2.4	2.4	2.3	2.2
	5.0	4.1	2.5	2.5	2.5	2.4	2.3	2.2
	7.0	6.0	2.6	2.6	2.5	2.4	2.3	2.2
	9.0	7.9	2.7	2.7	2.5	2.4	2.3	2.2
11.0	9.8	2.8	2.7	2.5	2.4	2.3	2.2	
13.0	11.8	2.8	2.7	2.5	2.4	2.3	2.2	
15.0	13.7	2.8	2.7	2.5	2.4	2.3	2.2	
25	-19.8	-20.0	1.9	1.9	1.9	1.9	1.9	1.9
	-18.8	-19.0	1.9	1.9	1.9	1.9	1.9	1.9
	-16.7	-17.0	2.1	2.1	2.0	2.0	2.0	2.0
	-13.7	-15.0	2.2	2.2	2.2	2.2	2.2	2.1
	-11.8	-13.0	2.3	2.3	2.3	2.3	2.3	2.3
	-9.8	-11.0	2.4	2.4	2.4	2.4	2.4	2.4
	-9.5	-10.0	2.5	2.4	2.4	2.4	2.4	2.4
	-8.5	-9.1	2.5	2.5	2.5	2.5	2.5	2.5
	-7.0	-7.6	2.6	2.6	2.6	2.6	2.6	2.6
	-5.0	-5.6	2.7	2.7	2.7	2.7	2.7	2.7
	-3.0	-3.7	2.8	2.8	2.8	2.8	2.8	2.8
	0.0	-0.7	3.0	3.0	3.0	3.0	3.0	2.8
	3.0	2.2	3.1	3.1	3.1	3.1	3.0	2.8
	5.0	4.1	3.3	3.2	3.2	3.1	3.0	2.8
	7.0	6.0	3.4	3.4	3.2	3.1	3.0	2.8
	9.0	7.9	3.5	3.4	3.2	3.1	3.0	2.8
11.0	9.8	3.6	3.4	3.2	3.1	3.0	2.8	
13.0	11.8	3.6	3.4	3.2	3.1	3.0	2.8	
15.0	13.7	3.6	3.4	3.2	3.1	3.0	2.8	
32	-19.8	-20.0	2.4	2.4	2.3	2.3	2.3	2.3
	-18.8	-19.0	2.4	2.4	2.4	2.4	2.4	2.4
	-16.7	-17.0	2.6	2.6	2.6	2.6	2.6	2.5
	-13.7	-15.0	2.7	2.7	2.7	2.7	2.7	2.7
	-11.8	-13.0	2.9	2.8	2.8	2.8	2.8	2.8
	-9.8	-11.0	3.0	3.0	3.0	3.0	3.0	3.0
	-9.5	-10.0	3.1	3.1	3.1	3.1	3.0	3.0
	-8.5	-9.1	3.1	3.1	3.1	3.1	3.1	3.1
	-7.0	-7.6	3.2	3.2	3.2	3.2	3.2	3.2
	-5.0	-5.6	3.4	3.4	3.4	3.4	3.4	3.4
	-3.0	-3.7	3.5	3.5	3.5	3.5	3.5	3.5
	0.0	-0.7	3.7	3.7	3.7	3.7	3.7	3.5
	3.0	2.2	3.9	3.9	3.9	3.9	3.7	3.5
	5.0	4.1	4.1	4.1	4.0	3.9	3.7	3.5
	7.0	6.0	4.2	4.2	4.0	3.9	3.7	3.5
	9.0	7.9	4.3	4.3	4.0	3.9	3.7	3.5
11.0	9.8	4.5	4.3	4.0	3.9	3.7	3.5	
13.0	11.8	4.5	4.3	4.0	3.9	3.7	3.5	
15.0	13.7	4.5	4.3	4.0	3.9	3.7	3.5	

# 6 Capacity tables

## 6 - 2 Heating Capacity Tables

FXDQ15-63P7

Unit size	Outdoor air temp.		On coil temp.: °C DB					
	°CDB	°CWB	16.0 kW	18.0 kW	20.0 kW	21.0 kW	22.0 kW	24.0 kW
40	-19,8	-20,0	3,0	2,9	2,9	2,9	2,9	2,9
	-18,8	-19,0	3,0	3,0	3,0	3,0	3,0	3,0
	-16,7	-17,0	3,2	3,2	3,2	3,2	3,2	3,2
	-13,7	-15,0	3,4	3,4	3,4	3,4	3,4	3,4
	-11,8	-13,0	3,6	3,6	3,6	3,5	3,5	3,5
	-9,8	-11,0	3,7	3,7	3,7	3,7	3,7	3,7
	-9,5	-10,0	3,8	3,8	3,8	3,8	3,8	3,8
	-8,5	-9,1	3,9	3,9	3,9	3,9	3,9	3,9
	-7,0	-7,6	4,0	4,0	4,0	4,0	4,0	4,0
	-5,0	-5,6	4,2	4,2	4,2	4,2	4,2	4,2
	-3,0	-3,7	4,4	4,4	4,4	4,4	4,4	4,4
	0,0	-0,7	4,7	4,6	4,6	4,6	4,6	4,4
	3,0	2,2	4,9	4,9	4,9	4,8	4,7	4,4
	5,0	4,1	5,1	5,1	5,0	4,8	4,7	4,4
	7,0	6,0	5,2	5,2	5,0	4,8	4,7	4,4
	9,0	7,9	5,4	5,3	5,0	4,8	4,7	4,4
11,0	9,8	5,6	5,3	5,0	4,8	4,7	4,4	
13,0	11,8	5,6	5,3	5,0	4,8	4,7	4,4	
15,0	13,7	5,6	5,3	5,0	4,8	4,7	4,4	
50	-19,8	-20,0	3,7	3,7	3,7	3,7	3,7	3,7
	-18,8	-19,0	3,8	3,8	3,8	3,8	3,8	3,8
	-16,7	-17,0	4,1	4,0	4,0	4,0	4,0	4,0
	-13,7	-15,0	4,3	4,3	4,3	4,2	4,2	4,2
	-11,8	-13,0	4,5	4,5	4,5	4,5	4,5	4,5
	-9,8	-11,0	4,7	4,7	4,7	4,7	4,7	4,7
	-9,5	-10,0	4,8	4,8	4,8	4,8	4,8	4,8
	-8,5	-9,1	4,9	4,9	4,9	4,9	4,9	4,9
	-7,0	-7,6	5,1	5,1	5,1	5,1	5,1	5,1
	-5,0	-5,6	5,3	5,3	5,3	5,3	5,3	5,3
	-3,0	-3,7	5,5	5,5	5,5	5,5	5,5	5,5
	0,0	-0,7	5,9	5,9	5,8	5,8	5,8	5,5
	3,0	2,2	6,2	6,2	6,2	6,1	5,9	5,5
	5,0	4,1	6,4	6,4	6,3	6,1	5,9	5,5
	7,0	6,0	6,6	6,6	6,3	6,1	5,9	5,5
	9,0	7,9	6,8	6,7	6,3	6,1	5,9	5,5
11,0	9,8	7,0	6,7	6,3	6,1	5,9	5,5	
13,0	11,8	7,1	6,7	6,3	6,1	5,9	5,5	
15,0	13,7	7,1	6,7	6,3	6,1	5,9	5,5	
63	-19,8	-20,0	4,7	4,7	4,7	4,7	4,7	4,7
	-18,8	-19,0	4,9	4,9	4,8	4,8	4,8	4,8
	-16,7	-17,0	5,1	5,1	5,1	5,1	5,1	5,1
	-13,7	-15,0	5,4	5,4	5,4	5,4	5,4	5,4
	-11,8	-13,0	5,7	5,7	5,7	5,7	5,7	5,7
	-9,8	-11,0	6,0	6,0	6,0	6,0	6,0	5,9
	-9,5	-10,0	6,1	6,1	6,1	6,1	6,1	6,1
	-8,5	-9,1	6,3	6,3	6,2	6,2	6,2	6,2
	-7,0	-7,6	6,5	6,5	6,4	6,4	6,4	6,4
	-5,0	-5,6	6,8	6,7	6,7	6,7	6,7	6,7
	-3,0	-3,7	7,0	7,0	7,0	7,0	7,0	7,0
	0,0	-0,7	7,5	7,4	7,4	7,4	7,4	7,0
	3,0	2,2	7,9	7,8	7,8	7,7	7,5	7,0
	5,0	4,1	8,1	8,1	8,0	7,7	7,5	7,0
	7,0	6,0	8,4	8,4	8,0	7,7	7,5	7,0
	9,0	7,9	8,7	8,5	8,0	7,7	7,5	7,0
11,0	9,8	8,9	8,5	8,0	7,7	7,5	7,0	
13,0	11,8	8,9	8,5	8,0	7,7	7,5	7,0	
15,0	13,7	9,0	8,5	8,0	7,7	7,5	7,0	


3TW32902-3

# 7 Dimensional drawings

## 7 - 1 Dimensional Drawings

7

FXDQ15-32P7

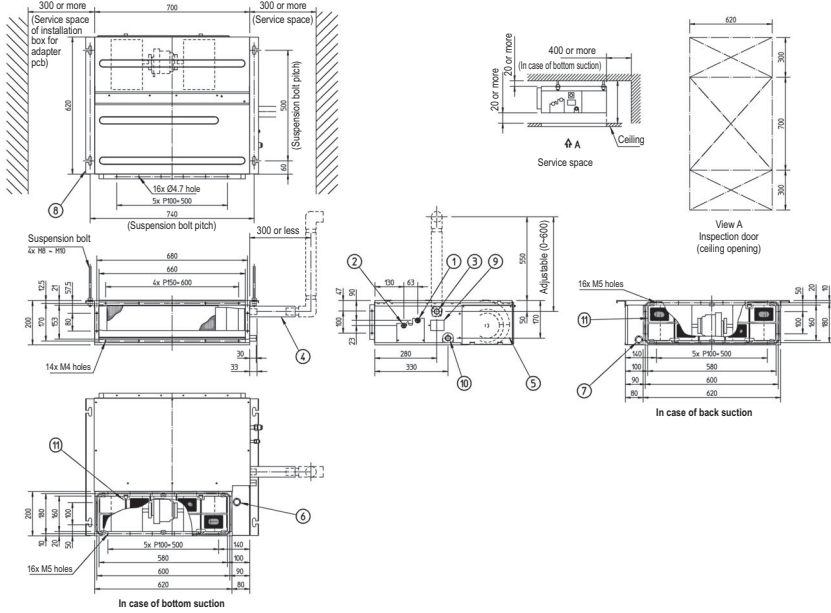


3TW32904-1

No.	Parts name	Description
1	Liquid pipe connection	Ø 6.4 flare connection
2	Gas pipe connection	Ø 12.7 flare connection
3	Drain pipe connection	VP20 (OD Ø 26, ID Ø 20)
4	Drain hose (accessory)	ID Ø 25 (outlet)
5	Control box	
6	Transmission wiring connection	
7	Power supply connection	
8	Suspension bracket	
9	Inspection cover	
10	Socket for drain	
11	Air filter (accessory)	

**NOTES**

- In case of back suction, mount chamber cover to bottom side of the unit. In case of bottom suction, mount chamber cover to back side of the unit.
- Location of unit name plate: control box cover.
- Mount the air filter at the suction side. (Use an air filter whose dust collecting efficiency is at least 50% in a gravimetric technique). It can not be equipped with air filter (accessory) when connecting duct to suction side.

FXDQ40-50P7

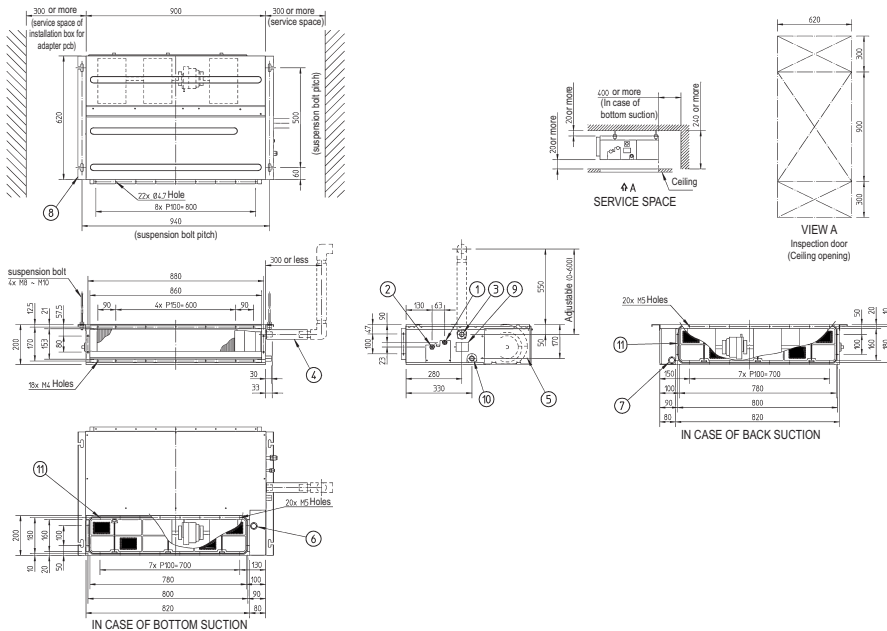

3TW32934-1

Nr	Name	Description
1	Liquid pipe connection	Ø 6.4 Flare connection
2	Gas pipe connection	Ø 12.7 Flare connection
3	Drain pipe connection	VP20 (OD Ø 26, ID Ø 20)
4	Drain hose (accessory)	ID Ø 25 (Outlet)
5	Control box	-
6	Transmission wiring connection	-
7	Power supply connection	-
8	Suspension Bracket	-
9	Inspection Cover	-
10	Socket for drain	-
11	Air filter (Accessory)	-

**NOTES**

- In case of back suction, mount chamber cover to bottom side of the unit. In case of bottom suction, mount chamber cover to back side of the unit.
- Location of unit name plate: control box cover.
- Mount the air filter at the suction side. (Use an air filter whose dust collecting efficiency is at least 50% in a gravimetric technique). It can not be equipped with air filter (Accessory) when connecting duct to suction side.

# 7 Dimensional drawings

## 7 - 1 Dimensional Drawings

**FXDQ63P7**

**3TW32954-1**

Nr	Name	Description
1	Liquid pipe connection	Ø 9.5 Flare connection
2	Gas pipe connection	Ø 15.9 Flare connection
3	Drain pipe connection	VP20 (OD Ø 26; ID Ø 20)
4	Drain hose (accessory)	ID Ø 25 (Outlet)
5	Control box	-
6	Transmission wiring connection	-
7	Power supply connection	-
8	Suspension Bracket	-
9	Inspection Cover	-
10	Socket for drain	-
11	Air filter (Accessory)	-

**NOTES**


- In case of back suction, mount chamber cover to bottom side of the unit.  
In case of bottom suction, mount chamber cover to back side of the unit.
- Location of unit name plate: control box cover.
- Mount the air filter at the suction side. (Use an air filter whose dust collecting efficiency is at least 50%. In a gravimetric technique). It can not be equipped with air filter (Accessory) when connecting duct to suction side.

## 8 Centre of gravity

### 8 - 1 Centre of Gravity


8

FXDQ15-32P7

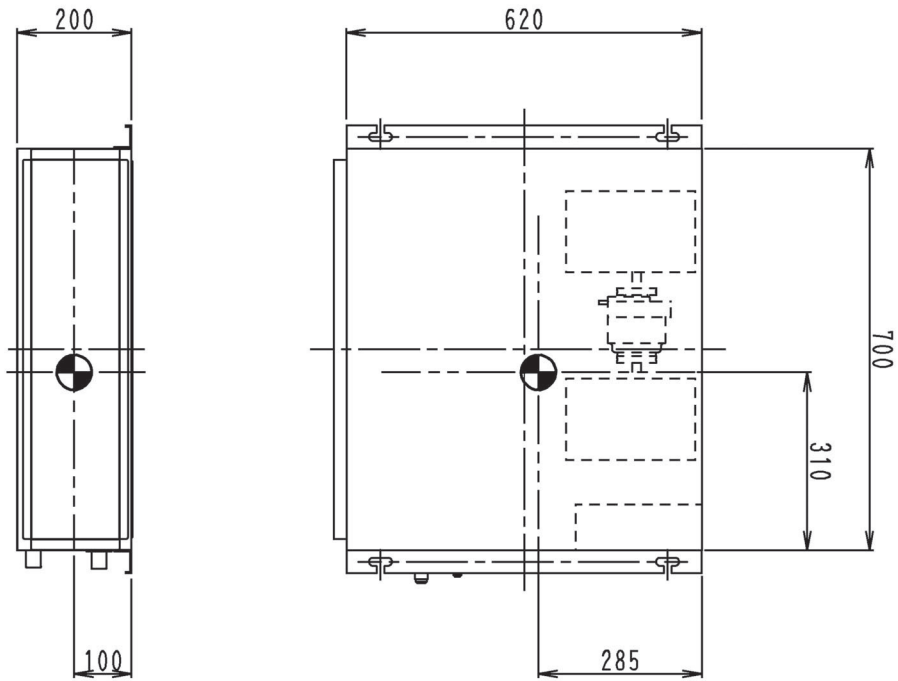

4D049300K

FXDQ40-50P7

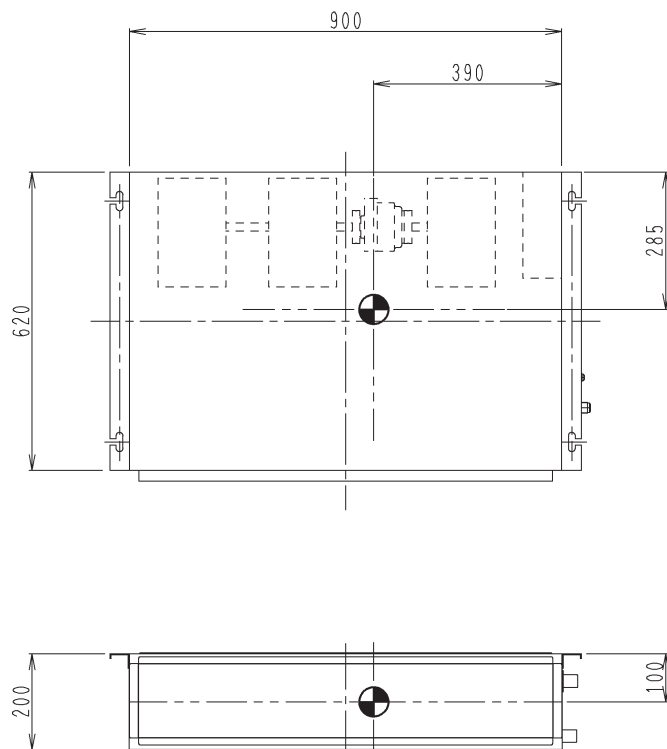


4D043886N



## 8 Centre of gravity


### 8 - 1 Centre of Gravity

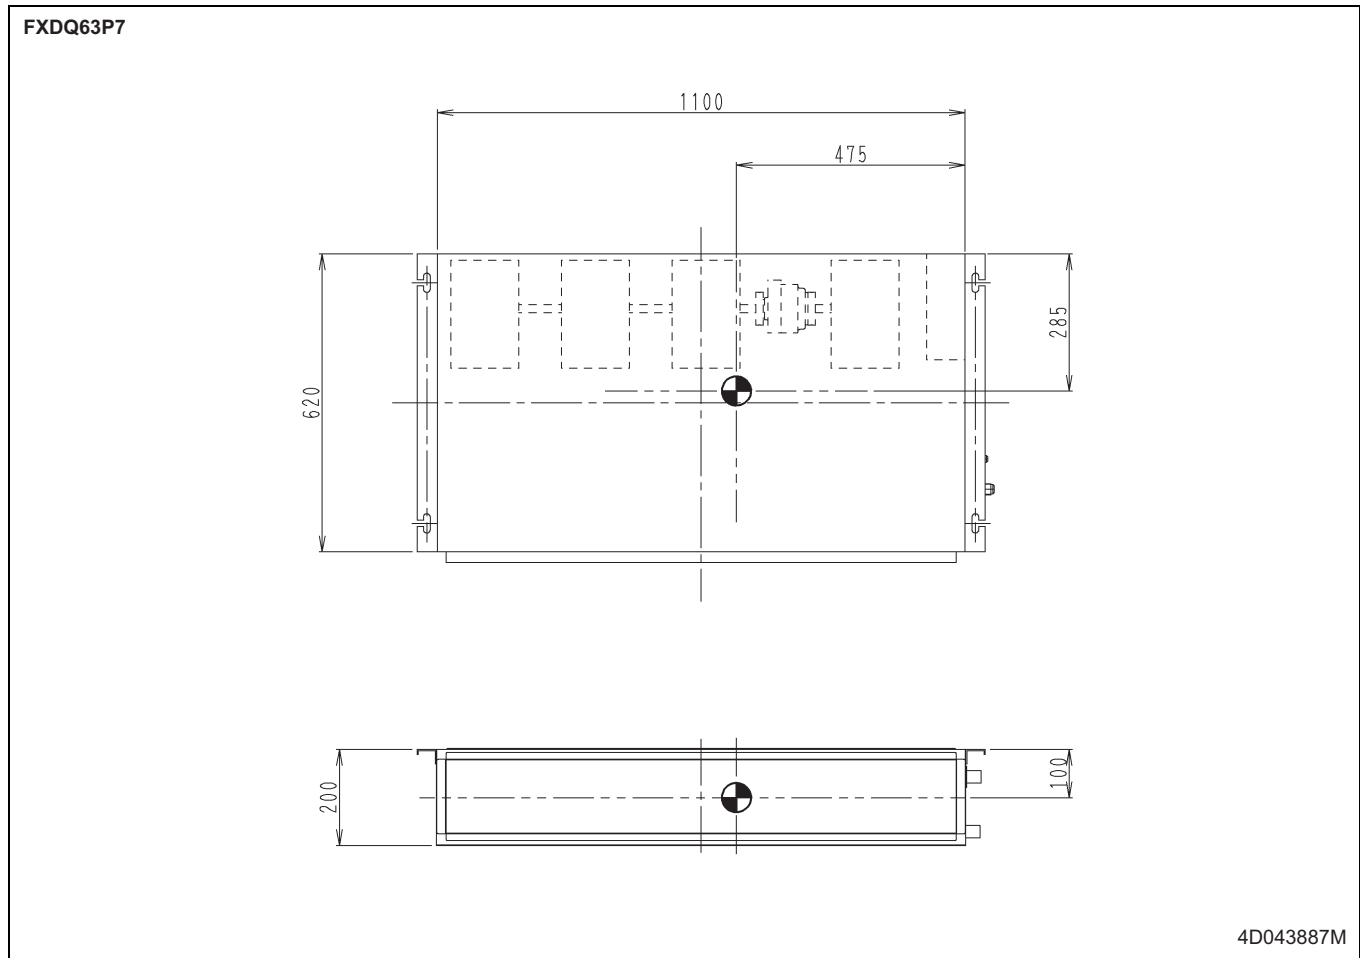

## 9 Piping diagrams

### 9 - 1 Piping Diagrams


9

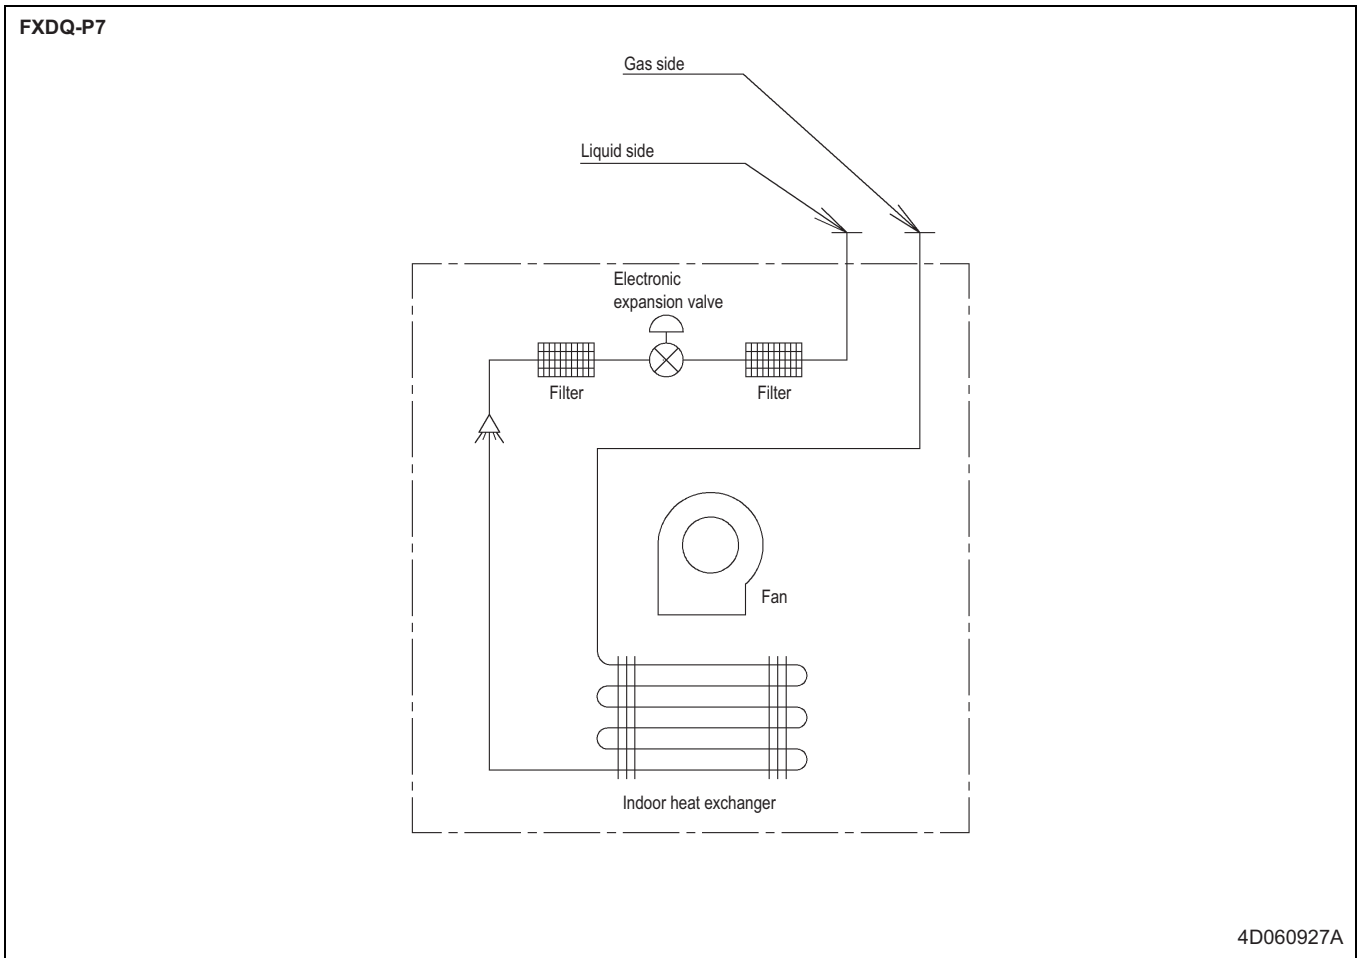

# 10 Wiring diagrams

## 10 - 1 Wiring Diagrams - Single Phase

FXDQ-P7

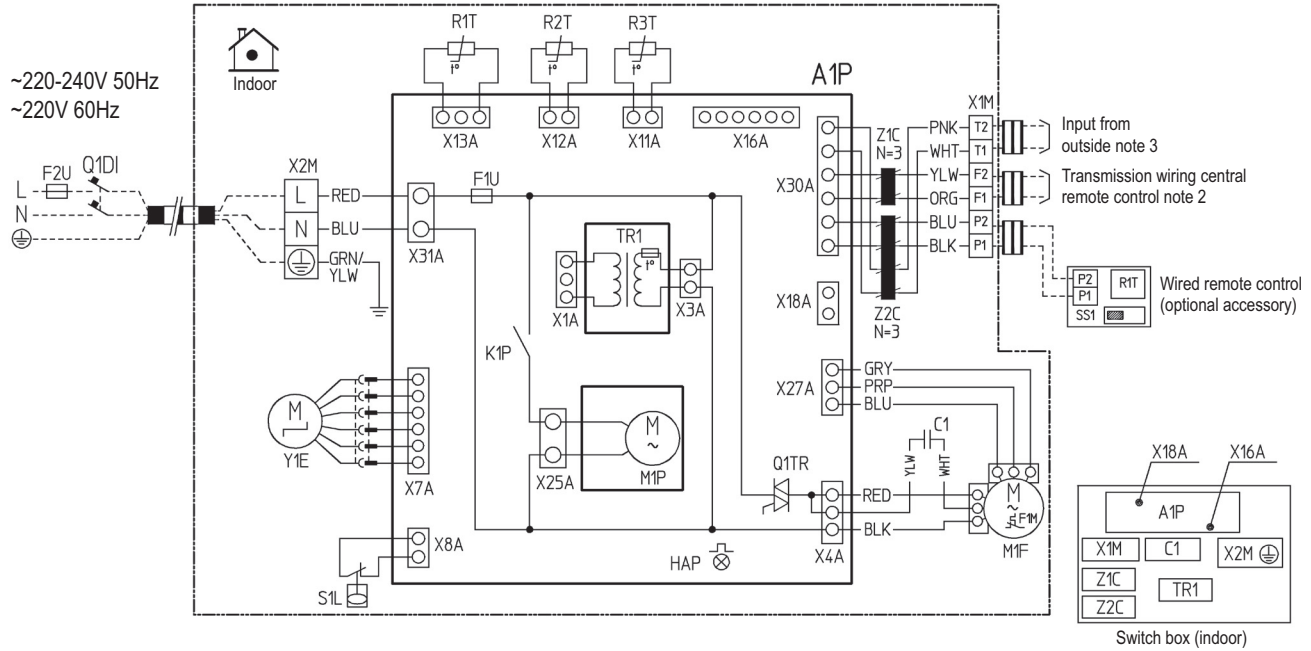

Indoor unit		R3TW	Thermistor (Gas)
A1P	Printed circuit board	S1L	Float switch
C1	Capacitor	TR1	Transformer (220V/22V)
F1M	Thermal protector (M1F embedded)	X1M	Terminal strip (Control)
F1U	Fuse (F, 5A, 250V)	X2M	Terminal strip (Power supply)
F2U	Field fuse	Y1E	Electronic expansion valve
HAP	Light emitting diode (Service monitor-green)	Z1C, Z2C	Noise filter (Ferrite core)
K1P	Magnetic relay	Connector optional accessory	
M1F	Motor (Fan)	X16A	Connector (adapter for wiring)
M1P	Motor (Drain pump)	X18A	Connector (wiring adapter for electrical appendices)
Q1DI	Earth leak detector	Wired remote control	
Q1TR	Phase control circuit	R1T	Thermistor (air)
R1T	Thermistor (Suction air)	SS1	Selector switch (main/sub)
R2T	Thermistor (Liquid)		

- : Field wiring  
 L : Live  
 N : Neutral  
   → : Connector  
 • : Wire clamp  
 : Protective earth (screw)
- Colors:   BLK: Black                    ORG: Orange                    WHT: White  
           BLU: Blue                     PNK: Pink                     YLW: Yellow  
           BRN: Brown                  PRP: Purple                  GRN: Green  
           GRY: Grey                    RED: Red

2TW32906-1

### NOTES


- Use copper conductors only.
- When using the central remote control, see manual for connection to the unit.
- When connecting the input wires from outside, forced 'OFF' or 'ON/OFF' operation can be selected by the remote control. See installation manual for more details.
- Remote control model varies according to the combination system, confirm engineering data and catalogs, etc. before connecting.

# 11 Sound data

## 11 - 1 Sound Pressure Spectrum

11

FXDQ15P7

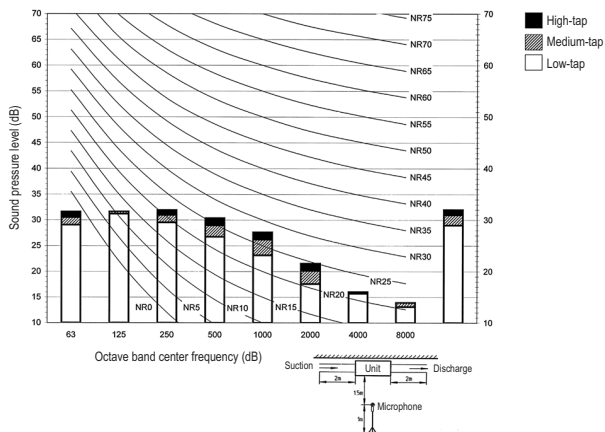


3TW33837-1

**NOTES**

1. Data is valid at free field condition.
2. Data is valid at nominal operation condition.
3. dBA = A-weighted sound pressure level. (A-scale according to IEC)
4. Reference acoustic pressures 0dB = 20μPa.

FXDQ20P7

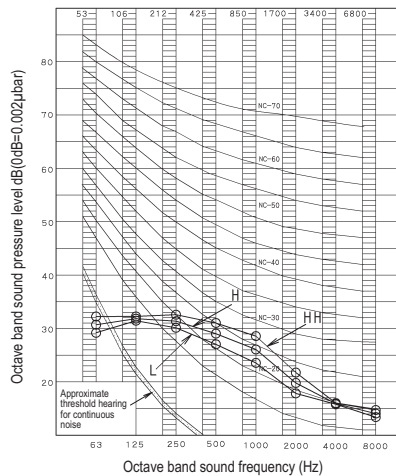


4D060945A


**NOTES**

1. Over All (dB): (B,G,N is already rectified)
2. Operating conditions:
  - Power source: 220-240V 50Hz / 220V 60Hz
  - Cooling: Return air temperature: 27°CDB, 19°CWB  
Outdoor temperature: 35°CDB, 24°WD
  - Heating: Return air temperature: 20°CDB, 15°CWB  
Outdoor temperature: 7°CDB, 6°WD
3. Measuring place: Anechoic chamber.
4. The operating condition is external static pressure 10Pa. Operating noise differs with operation and ambient conditions.
6. Location of microphone.

Scale	Air flow rate		
	HH	H	L
A	33.0	31.0	29.0
C	39.0	37.5	36.0



FXDQ25P7

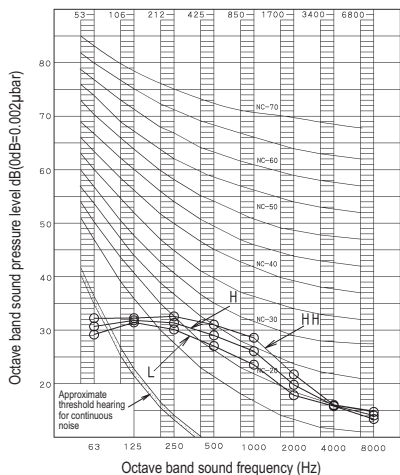


4D060946A


**NOTES**

1. Over All (dB): (B,G,N is already rectified)
2. Operating conditions:
  - Power source: 220-240V 50Hz / 220V 60Hz
  - Cooling: Return air temperature: 27°CDB, 19°CWB  
Outdoor temperature: 35°CDB, 24°WD
  - Heating: Return air temperature: 20°CDB, 15°CWB  
Outdoor temperature: 7°CDB, 6°WD
3. Measuring place: Anechoic chamber.
4. The operating condition is external static pressure 10Pa. Operating noise differs with operation and ambient conditions.
6. Location of microphone.

Scale	Air flow rate		
	HH	H	L
A	33.0	31.0	29.0
C	39.0	37.5	36.0



FXDQ32P7

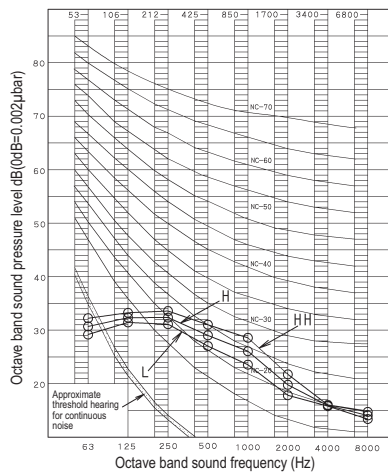


4D060947A

**NOTES**




1. Over All (dB): (B,G,N is already rectified)
2. Operating conditions:
  - Power source: 220-240V 50Hz / 220V 60Hz
  - Cooling: Return air temperature: 27°CDB, 19°CWB  
Outdoor temperature: 35°CDB, 24°WD
  - Heating: Return air temperature: 20°CDB, 15°CWB  
Outdoor temperature: 7°CDB, 6°WD
3. Measuring place: Anechoic chamber.
4. The operating condition is external static pressure 10Pa. Operating noise differs with operation and ambient conditions.
6. Location of microphone.

Scale	Air flow rate		
	HH	H	L
A	33.0	31.0	29.0
C	39.0	37.5	36.0



# 11 Sound data


## 11 - 1 Sound Pressure Spectrum

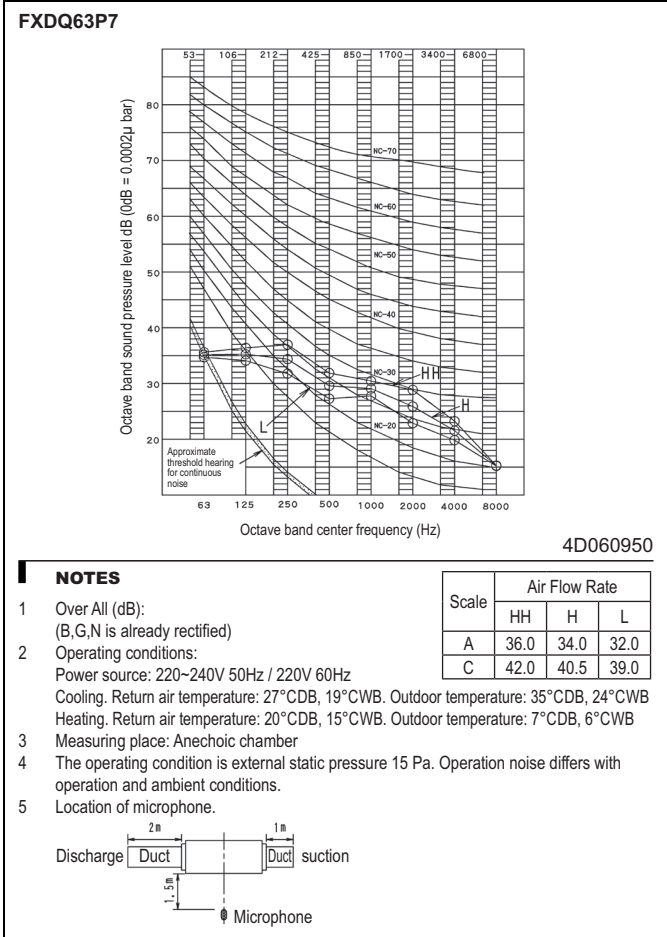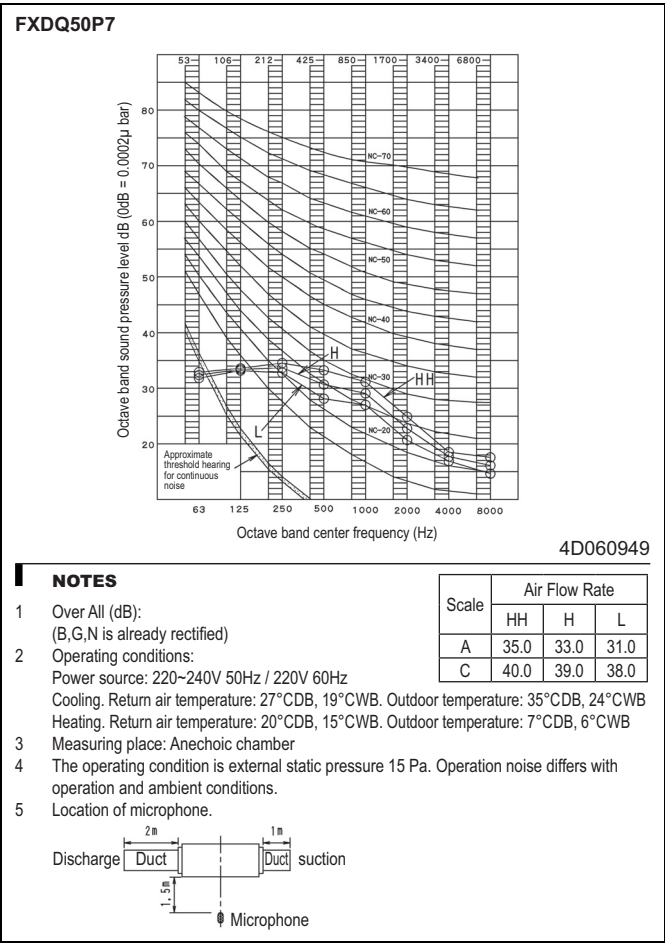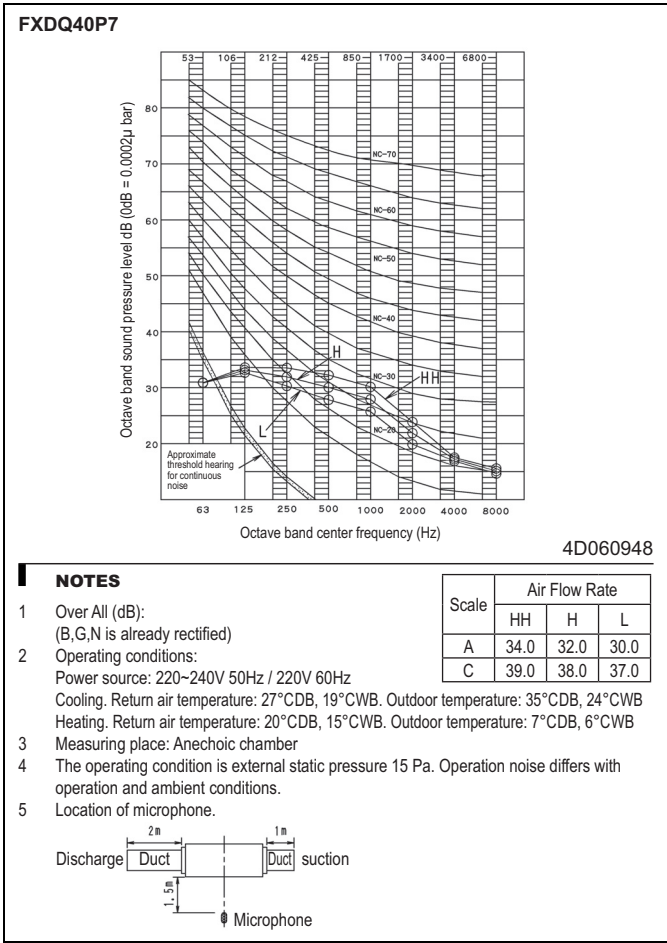

# 12 Fan characteristics

## 12 - 1 Fan Characteristics

FXDQ15P7

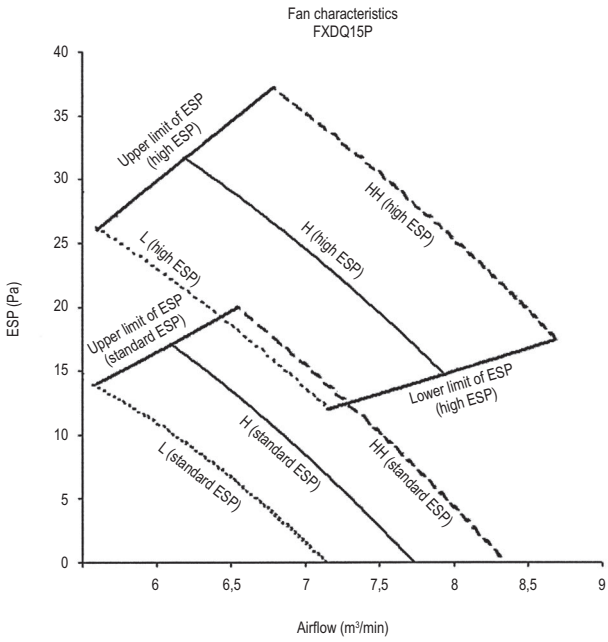


4TW33838-1

**NOTES**

1. Fan characteristics as shown are in "fan only" mode.
2. EPS: External static pressure.

FXDQ20,25P7

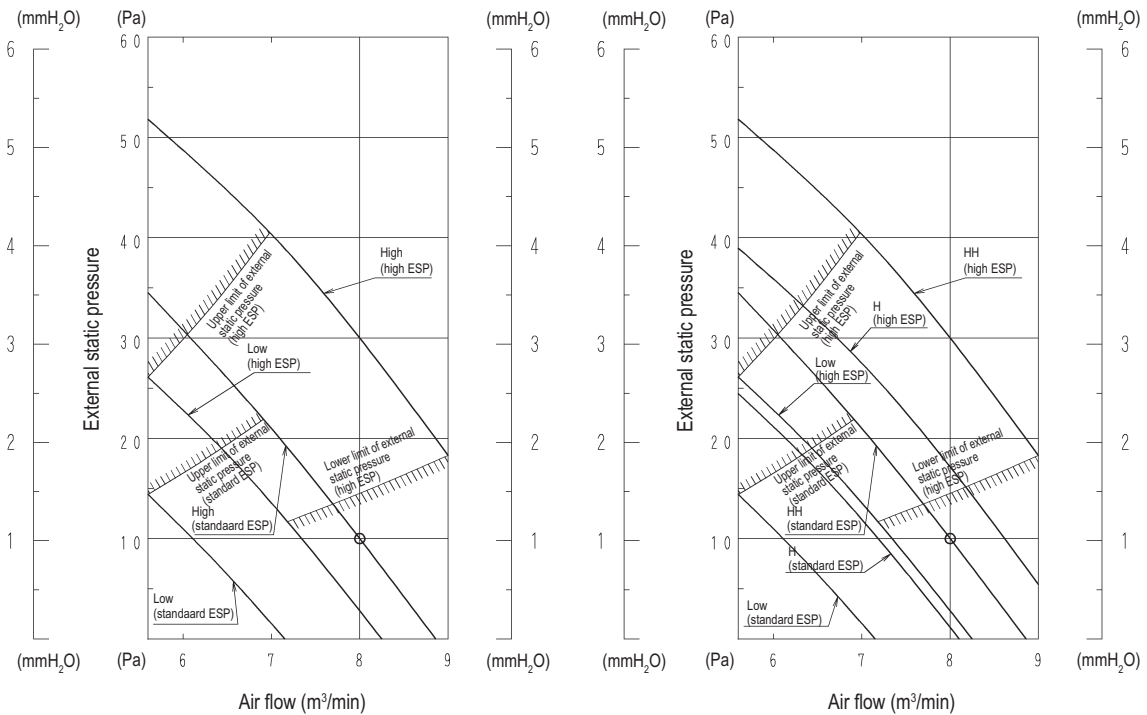

3D052156C


**NOTES**

1. The remote control can be used to switch between 'high' and 'low'. ('HH', 'H' and 'L' for FXDQ-PBVE(T) model)
2. The air flow is set to 'standard' before leaving the factory. It is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

# 12 Fan characteristics

## 12 - 1 Fan Characteristics

FXDQ32P7

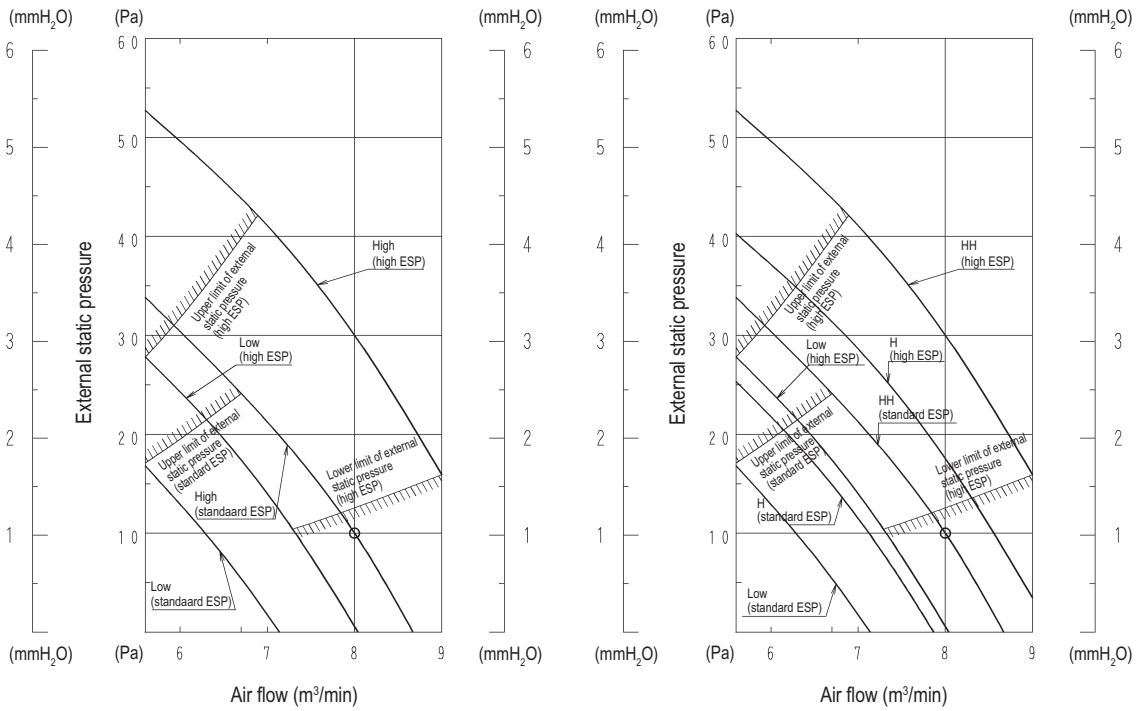


3D052157C

**NOTES**

1. The remote control can be used to switch between 'high' and 'low'. ('HH', 'H' and 'L' for FXDQ-PBVE(T) model)
2. The air flow is set to 'standard' before leaving the factory. It is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

FXDQ40P7

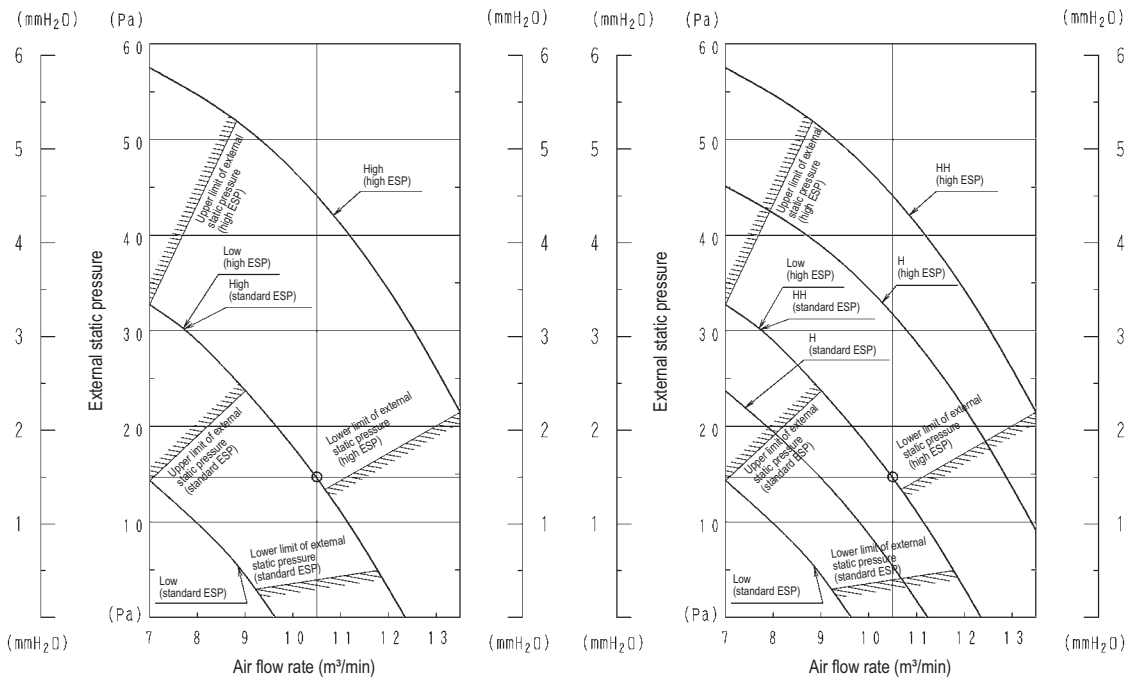

**NOTES**


1. The remote control can be used to switch between 'high' and 'low' ('HH', 'H' and 'L' for FXDQ-P7 model)
2. The air flow is set to 'standard' before leaving the factory.  
It is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

3D046299D

# 12 Fan characteristics

## 12 - 1 Fan Characteristics

FXDQ50P7

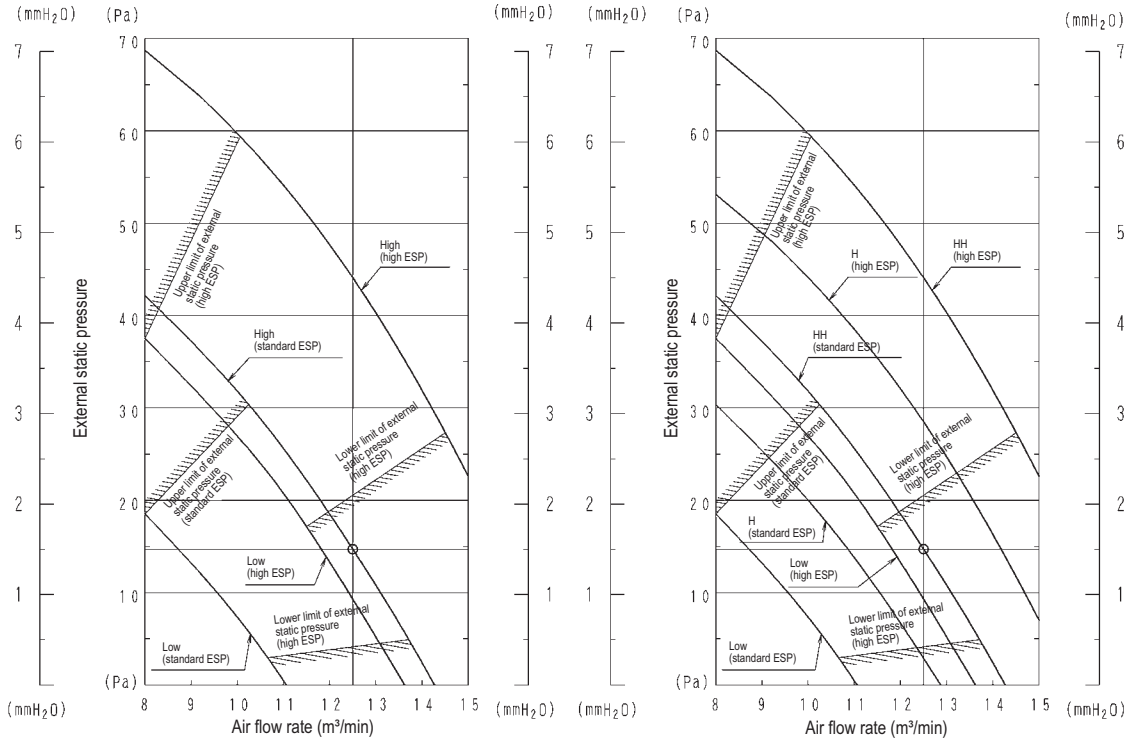


**NOTES**

1. The remote control can be used to switch between 'high' and 'low' ('HH', 'H' and 'L' for FXDQ-P7 model)
2. The air flow is set to 'standard' before leaving the factory.  
it is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

3D046300D

FXDQ63P7

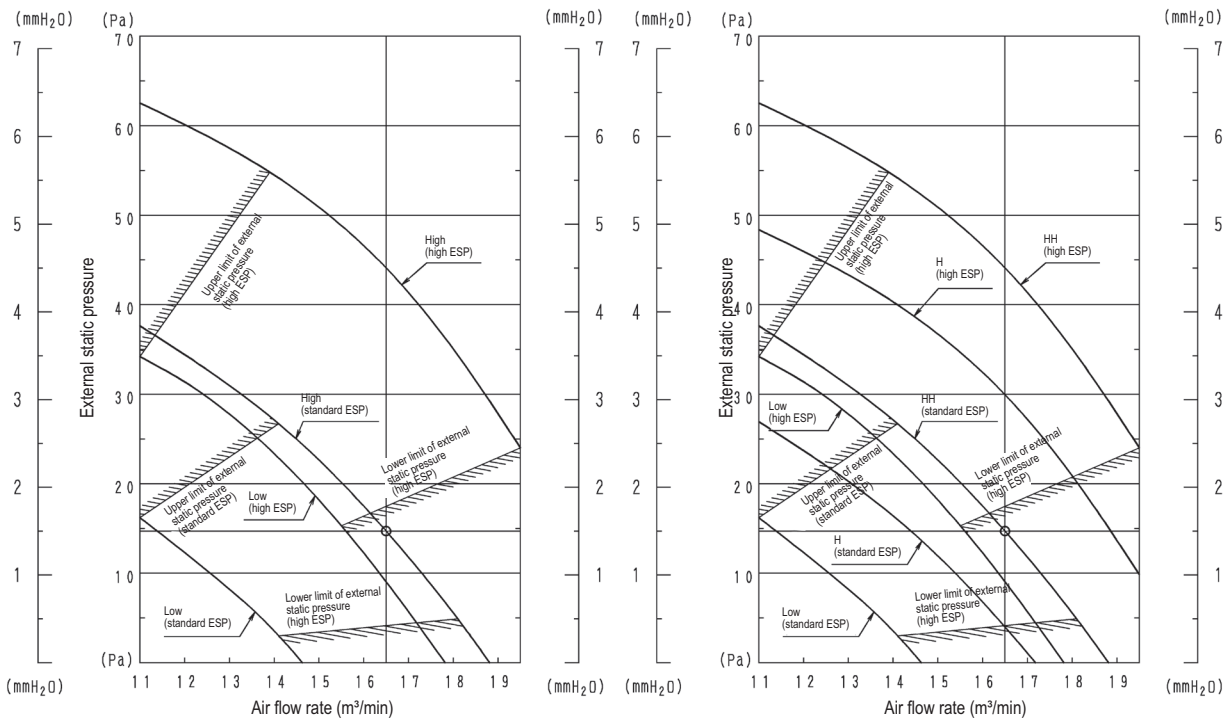

**NOTES**

1. The remote control can be used to switch between 'high' and 'low' ('HH', 'H' and 'L' for FXDQ-P7 model)
2. The air flow is set to 'standard' before leaving the factory.  
It is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

3D046301D





Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

BARCODE

Daikin products are distributed by:

