




Air Conditioning Technical Data

Concealed ceiling unit with inverter driven fan

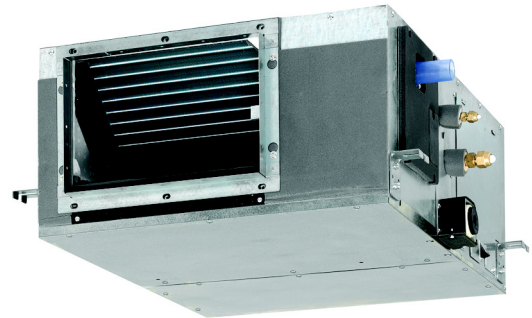

EEDEN12-204

FXSQ-P


TABLE OF CONTENTS

FXSQ-P

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	4
3	Electrical data	5
	Electrical Data	5
4	Safety device settings	6
	Safety Device Settings	6
5	Options	7
	Options	7
6	Capacity tables	8
	Cooling Capacity Tables	8
	Heating Capacity Tables	10
7	Dimensional drawings	12
	Dimensional Drawings	12
8	Centre of gravity	14
	Centre of Gravity	14
9	Piping diagrams	15
	Piping Diagrams	15
10	Wiring diagrams	16
	Wiring Diagrams - Single Phase	16
11	Sound data	17
	Sound Power Spectrum	17
	Sound Pressure Spectrum	19
12	Fan characteristics	21
	Fan Characteristics	21
13	Installation	25
	Installation Method	25
	Filter Installation Method	26
	Switch Box Connection	27

1 Features

- Easy installation thanks to automatic air flow adjustment towards nominal air flow rate
- Low energy consumption thanks to DC inverter fans
- Improved comfort thanks to 3-step air flow control
- Up to 140Pa external static pressure (ESP) facilitates using flexible ducts of varying lengths: ideal for shops and medium size offices
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- The use of an integrated inverter control ensures maximum comfort and efficiency.
- The air suction direction can be altered from rear to bottom suction
- Standard air filter removes airborne dust particles to ensure a steady supply of clean air
- Standard built-in drain pump increases reliability of the drain system
- Allows multi tenant applications (option PCB required)

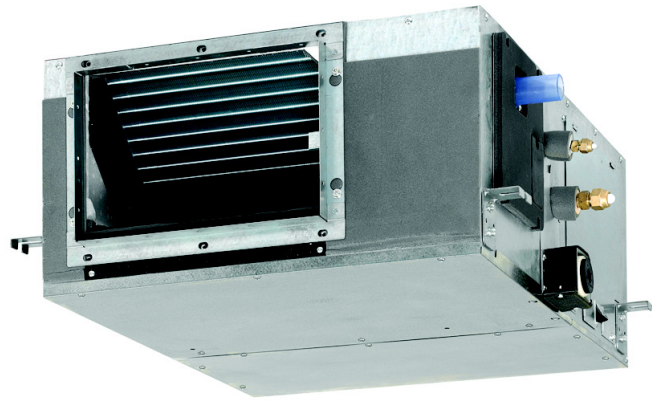

heat pump

3 steps

optional



standard

2 Specifications

2-1 Technical Specifications				FXSQ20P	FXSQ25P	FXSQ32P	FXSQ40P	FXSQ50P	FXSQ63P	FXSQ80P	FXSQ100P	FXSQ125P	FXSQ140P	
Cooling capacity	Nom.			kW	2.2 (1)	2.8 (1)	3.6 (1)	4.5 (1)	5.6 (1)	7.1 (1)	9.0 (1)	11.2 (1)	14.0 (1)	16.0 (1)
Heating capacity	Nom.			kW	2.5 (2)	3.2 (2)	4.0 (2)	5.0 (2)	6.3 (2)	8.0 (2)	10.0 (2)	12.5 (2)	16.0 (2)	18.0 (2)
Power input - 50Hz	Cooling	Nom.		kW	0.041 (1)		0.044 (1)	0.097 (1)		0.074 (1)	0.118 (1)	0.117 (1)	0.185 (1)	0.261 (1)
	Heating	Nom.		kW	0.029 (2)		0.032 (2)	0.085 (2)		0.062 (2)	0.106 (2)	0.105 (2)	0.173 (2)	0.249 (2)
Power input - 60Hz	Cooling	Nom.		kW	0.041 (1)		0.044 (1)	0.097 (1)		0.074 (1)	0.118 (1)	0.117 (1)	0.185 (1)	0.261 (1)
	Heating	Nom.		kW	0.029 (2)		0.032 (2)	0.085 (2)		0.062 (2)	0.106 (2)	0.105 (2)	0.173 (2)	0.249 (2)
Casing	Colour			Unpainted										
	Material			Galvanised steel										
Dimensions	Unit	Height	mm	300										
		Width	mm	550		700		1,000		1,400				
		Depth	mm	700										
	Packed unit	Height	mm	355										
		Width	mm	770		920		1,220		1,620				
		Depth	mm	900										
Required ceiling void >				mm	350									
Weight	Unit			kg	23		26		35		46		47	
	Packed unit			kg	28		32		42		54		55	
Decoration panel	Model			BYBS32DJW1		BYBS45DJW1		BYBS71DJW1		BYBS125DJW1				
	Colour			White (10Y9/0.5)										
	Dimensions	Height	mm	55										
		Width	mm	650		800		1,100		1,500				
		Depth	mm	500										
	Weight			kg	3.0		3.5		4.5		6.5			
Heat exchanger	Length			mm	290		440		740		1,140			
	Rows	Quantity			3									
	Fin pitch			mm	1.75								1.50	
	Passes	Quantity			3		4		7		11			
	Face area			m ²	0.097		0.148		0.249		0.383			
	Stages	Quantity			16									
	Empty tubeplate hole	Quantity			12		0							
	Tube type			ø7 Hi-XSS										
	Fin	Type			Symmetric waffle louvre									
		Treatment			Hydrophilic									
Fan	Type			Sirocco fan										
	Quantity			1			2			3				
	Air flow rate - 50Hz	Cooling	High	m ³ /min	9	9.5	16	19.5	25	32	39	46		
			Low	m ³ /min	6.5	7	11	16	20	23	28	32		
		Heating	High	m ³ /min	9	9.5	16	19.5	25	32	39	46		
			Low	m ³ /min	6.5	7	11	16	20	23	28	32		
	Air flow rate - 60Hz	Cooling	High	m ³ /min	9	9.5	16	19.5	25	32	39	46		
			Low	m ³ /min	6.5	7	11	16	20	23	28	32		
		Heating	High	m ³ /min	9	9.5	16	19.5	25	32	39	46		
			Low	m ³ /min	6.5	7	11	16.0	20	23	28	32		
	External static pressure - 50Hz	High	Pa	70			100			120		140		
		Nom.	Pa	30			40			50				
	External static pressure - 60Hz	High	Pa	70			100			120		140		
Nom.		Pa	30			40			50					

2 Specifications

2

2-1 Technical Specifications				FXSQ20P	FXSQ25P	FXSQ32P	FXSQ40P	FXSQ50P	FXSQ63P	FXSQ80P	FXSQ100P	FXSQ125P	FXSQ140P		
Fan motor	Quantity			1											
	Model			Brushless DC motor											
	Speed	Steps			9		10		8		9			11	
		Cooling	High	rpm	1,031		1,061		1,186		975	1,161	1,060	1,218	1,325
			Low	rpm	802		827		875		840	960	813	920	948
		Heating	High	rpm	1,031		1,061		1,186		975	1,161	1,060	1,218	1,325
	Low		rpm	802		827		875		840	960	813	920	948	
Output	High	W	90		140		350								
Drive			Direct drive												
Sound power level	Cooling	Nom.	dBA	55		56		63		59	63	61	66	67	
Sound pressure level	Cooling	High	dBA	32		33		37			38		40	42	
		Low	dBA	26		27		29		30	32		33	34	
	Heating	High	dBA	32		33		37			38		40	42	
		Low	dBA	26		27		29		30	32		33	34	
Refrigerant	Type			R-410A											
	Control			Electronic expansion valve											
Piping connections	Liquid	Type		Flare connection											
		OD	mm	6.35					9.52						
	Gas	Type		Flare connection											
		OD	mm	12.7					15.9						
	Drain			VP25 (O.D. 32 / I.D. 25)											
Heat insulation			Both liquid and gas pipes												
Drain-up height			mm	625											
Safety devices	Item	01		Drain pump fuse									PC board fuse		
		02		PC board fuse									PC board fuse (fan driver)		
		03		PC board fuse (fan driver)									Drain pump fuse		

2-2 Electrical Specifications				FXSQ20P	FXSQ25P	FXSQ32P	FXSQ40P	FXSQ50P	FXSQ63P	FXSQ80P	FXSQ100P	FXSQ125P	FXSQ140P
Power supply	Name			VE									
	Phase			1~									
	Frequency		Hz	50/60									
	Voltage		V	220-240/220									
Voltage range	Min.	%	-10										
	Max.	%	10										
Current - 50Hz	Minimum circuit amps (MCA)		A	0.5		1.2		1.1	1.3	1.4	1.9	3.1	
	Maximum fuse amps (MFA)		A	16									
Current - 60Hz	Minimum circuit amps (MCA)		A	0.5		1.2		1.1	1.3	1.4	1.9	3.1	
	Maximum fuse amps (MFA)		A	16									

Notes

- (1) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 7.5m; level difference: 0m
- (2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 7.5m; level difference: 0m
- (3) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.
- (4) The sound pressure values are mentioned for a unit installed with rear suction.
- (5) Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
- (6) Maximum allowable voltage range variation between phases is 2%.
- (7) Select wire size based on the value of MCA
- (8) Use a circuit breaker instead of a fuse.

3 Electrical data

3 - 1 Electrical Data

FXSQ-P

Model	Type	Hz	Units			Power Supply	
			Volts	Min.	Max.	MCA	MFA
FXSQ20	VE	50/60	220~240V/220V	-10%	+10%	0.5	16
FXSQ25						0.5	16
FXSQ32						0.5	16
FXSQ40						1.2	16
FXSQ50						1.2	16
FXSQ63						1.1	16
FXSQ80						1.3	16
FXSQ100						1.6	16
FXSQ125						2.1	16
FXSQ140						3.1	16

SYMBOLS

MCA : Min.Circuit Amps. (A)
 MFA : Max. Fuse Amps. (A) (see note 4)

NOTES

- 1 Voltage range
 Units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
- 2 Maximum allowable voltage variation between phases is 2%
- 3 Select wire size based on the MCA.
- 4 Instead of a fuse, use a circuit breaker.

4TW31181-2A

4 Safety device settings

4 - 1 Safety Device Settings

4

FXSQ20-140P

Safety devices		20	25	32	40	50	63	80	100	125	140
FXSQ	PC Board Fuse	250V 3.15A	250V 3.15A	250V 3.15A	250V 3.15A	250V 3.15A	250V 3.15A	250V 3.15A	250V 3.15A	250V 3.15A	250V 3.15A
	PC Board Fuse (Fan Driver)	250V 5A	250V 5A	250V 5A	250V 5A	250V 5A	250V 6.3A	250V 6.3A	250V 6.3A	250V 6.3A	250V 6.3A
	Fan Motor Thermal Protector	°C	—	—	—	—	—	—	—	—	—
	Drain Pump Fuse	°C	145	145	145	145	145	145	145	145	145

3TW31189-2A

5 Options

5 - 1 Options

FXSQ20-140P			
Options			
Item	Type		
Panel related	Decoration panel (*5)		
Air inlet and air discharge outlet related	Air discharge adapter for round duct		
Panel related	Decoration panel option		
	FXSQ20,25,32	FXSQ40,50	FXSQ63,80
	BYBS32	BYBS45D	BYBS71D
	KDAJ25K36A	KDAJ25K56A	KDAJ25KA71A
			KDAJ25KA140A
	EKBYBSD		
Operation Control			
Item	Type		
Remote Control	Wired Type		
	Infrared type	HP	CO
Simplified remote control			
Remote control for hotel use			
Option BCB for external el. heater, humidifier and/or hour meter (*1), (*2), (*3), (*4)			
Adapter for wiring (interlock for fresh air intake fan) (*4)			
Wiring adapter for electrical appendices (1) (*2), (*4)			
Wiring adapter for electrical appendices (2) (*4)			
Remote sensor			
Central remote control			
Electrical box with earth terminal (3 blocks)			
Unified ON/OFF control			
Electrical box with earth terminal (2 blocks)			
Schedule timer			
External adapter for outdoor unit (installation on indoor unit) (*4)			
Mounting plate for adapter PCB			
	FXSQ20,25,32	FXSQ40,50	FXSQ63,80
			FXSQ100,125,140
	BRC1D528 / BRC1E51A		
	BRC4C65		
	BRC4C66		
	BRC2C51		
	BRC3A61		
	EKRP1B2A		
	KRP1C64		
	KRP2A51		
	KRP4A51		
	KRCS01-4B		
	DCS302CA51		
	KJB311A		
	DCS301BA51		
	KJB212A		
	DST301BA51		
	DTA104A61		
	KRP4A96		
NOTES			
(*1): Electrical heater and humidifier are field supply. These parts should not be installed inside the equipment (refer to installation manual EKRP1B2A)			
(*2): If installing an electrical heater, an option PCB for external heater (EKRP1B2) for each indoor unit is required.			
(*3): An electrical heater can not be used for VRV system cooling only.			
(*4): Mounting plate KRP4A96 is required for these options. Maximum 2 option PCB's can be mounted.			
(*5): Decoration panel option EKBYBSD is required for direct mounting of the decoration panel on the unit.			
Contents of accessory bag			
Description	Quantity		
	FXSQ 20,25,32,40,50,63,80,100,125,140		
Hexagon tapping screw (M5x16)	16		
Round plain washer for wood	8		
Installation and operation manual	1		
Hose band	1		
Insulation for joint (GAS)	1		
Insulation for joint (LIQUID)	1		
Drain hose	1		
Drain hose sealing material	1		
Sealing material	2		

3TW31189-3D

6 Capacity tables

6 - 1 Cooling Capacity Tables

6

FXSQ-P															
Unit size	Outdoor °CDB	Indoor air temp.													
		14.OWB		16.OWB		18.OWB		19.OWB		20.OWB		22.OWB		24.OWB	
		20.ODB		23.ODB		26.ODB		27.ODB		28.ODB		30.ODB		32.ODB	
		TH	SHC	TH	SHC	TH	SHC	TH	SHC	TH	SHC	TH	SHC	TH	SHC
20	10.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.6	2.0	2.8	2.1
	12.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.6	2.0	2.7	2.0
	14.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.6	2.0	2.7	2.0
	16.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.6	2.0	2.7	2.0
	18.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.6	2.0	2.6	2.0
	20.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.5	1.9	2.6	2.0
	21.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.5	1.9	2.6	2.0
	23.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.5	1.9	2.5	1.9
	25.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.5	1.9	2.5	1.9
	27.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.4	1.9	2.5	1.9
	29.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.4	1.8	2.4	1.9
	31.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.4	1.8	2.4	1.8
	33.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.3	1.9	2.3	1.8	2.4	1.8
	35.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.2	1.9	2.3	1.8	2.3	1.8
	37.0	1.5	1.5	1.8	1.8	2.1	1.9	2.2	1.9	2.2	1.8	2.2	1.7	2.3	1.8
	39.0	1.5	1.5	1.8	1.8	2.1	1.9	2.1	1.9	2.2	1.8	2.2	1.7	2.3	1.8
25	10.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.3	2.4	3.5	2.4
	12.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.3	2.4	3.5	2.4
	14.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.3	2.4	3.4	2.4
	16.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.3	2.4	3.4	2.4
	18.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.3	2.4	3.4	2.4
	20.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.2	2.3	3.3	2.3
	21.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.2	2.3	3.3	2.3
	23.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.2	2.3	3.2	2.3
	25.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.1	2.3	3.2	2.3
	27.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.1	2.2	3.2	2.3
	29.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	3.0	2.3	3.0	2.2	3.1	2.2
	31.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	2.9	2.3	3.0	2.2	3.1	2.2
	33.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	2.9	2.3	2.9	2.2	3.0	2.2
	35.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	2.8	2.2	2.9	2.1	3.0	2.2
	37.0	1.9	1.8	2.3	2.0	2.6	2.3	2.8	2.3	2.8	2.2	2.9	2.1	2.9	2.1
	39.0	1.9	1.8	2.3	2.0	2.6	2.3	2.7	2.2	2.7	2.2	2.8	2.1	2.9	2.1
32	10.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.3	3.0	4.6	3.0
	12.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.3	3.0	4.5	3.0
	14.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.3	3.0	4.4	3.0
	16.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.3	3.0	4.4	3.0
	18.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.2	3.0	4.3	2.9
	20.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.2	2.9	4.3	2.9
	21.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.1	2.9	4.2	2.9
	23.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.1	2.9	4.2	2.9
	25.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.0	2.9	4.1	2.8
	27.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	4.0	2.8	4.1	2.8
	29.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.9	3.9	2.8	4.0	2.8
	31.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.8	2.8	3.8	2.8	3.9	2.7
	33.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.7	2.8	3.8	2.7	3.9	2.7
	35.0	2.4	2.2	2.9	2.5	3.4	2.8	3.6	2.9	3.6	2.8	3.7	2.7	3.8	2.7
	37.0	2.4	2.2	2.9	2.5	3.4	2.8	3.5	2.8	3.6	2.8	3.7	2.7	3.8	2.7
	39.0	2.4	2.2	2.9	2.5	3.4	2.8	3.5	2.8	3.5	2.7	3.6	2.6	3.7	2.6
40	10.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.4	3.9	5.7	4.0
	12.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.4	3.9	5.6	4.0
	14.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.4	3.9	5.5	4.0
	16.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.4	3.9	5.5	3.9
	18.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.3	3.9	5.4	3.9
	20.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.2	3.8	5.3	3.9
	21.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.2	3.8	5.3	3.8
	23.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.1	3.8	5.2	3.8
	25.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.0	3.7	5.1	3.8
	27.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	5.0	3.7	5.1	3.7
	29.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.8	3.8	4.9	3.7	5.0	3.7
	31.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.7	3.8	4.8	3.6	4.9	3.6
	33.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.6	3.7	4.7	3.6	4.8	3.6
	35.0	3.0	2.9	3.6	3.4	4.2	3.8	4.5	3.8	4.6	3.7	4.7	3.5	4.8	3.6
	37.0	3.0	2.9	3.6	3.4	4.2	3.8	4.4	3.8	4.5	3.6	4.6	3.5	4.7	3.5
	39.0	3.0	2.9	3.6	3.4	4.2	3.8	4.4	3.7	4.4	3.6	4.5	3.4	4.6	3.5
50	10.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.7	4.6	7.1	4.6
	12.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.7	4.6	7.0	4.6
	14.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.7	4.6	6.9	4.5
	16.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.7	4.6	6.8	4.5
	18.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.6	4.6	6.7	4.4
	20.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.5	4.5	6.6	4.4
	21.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.4	4.5	6.6	4.4
	23.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.4	4.5	6.5	4.3
	25.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.3	4.4	6.4	4.3
	27.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	6.0	4.5	6.2	4.4	6.3	4.2
	29.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	5.9	4.5	6.1	4.3	6.2	4.2
	31.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	5.9	4.4	6.0	4.3	6.1	4.1
	33.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	5.8	4.4	5.9	4.2	6.0	4.1
	35.0	3.8	3.4	4.5	3.9	5.2	4.4	5.6	4.4	5.7	4.3	5.8	4.2	5.9	4.1
	37.0	3.8	3.4	4.5	3.9	5.2	4.4	5.5	4.4	5.6	4.3	5.7	4.1	5.8	4.0
	39.0	3.8	3.4	4.5	3.9	5.2	4.4	5.4	4.3	5.5	4.2	5.6	4.1	5.8	4.0

3TW31182-1B

8

6 Capacity tables

6 - 1 Cooling Capacity Tables

Unit size		Indoor air temp.													
Outdoor °CDB	°CDB	14.OWB		16.OWB		18.OWB		19.OWB		20.OWB		22.OWB		24.OWB	
		20.ODB		23.ODB		26.ODB		27.ODB		28.ODB		30.ODB		32.ODB	
		TH	SHC	TH	SHC	TH	SHC	TH	SHC	TH	SHC	TH	SHC	TH	SHC
63	10.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	8.5	5.8	9.0	5.8
	12.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	8.5	5.8	8.9	5.8
	14.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	8.5	5.8	8.7	5.7
	16.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	8.5	5.8	8.6	5.7
	18.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	8.3	5.8	8.5	5.6
	20.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	8.2	5.7	8.4	5.6
	21.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	8.2	5.7	8.3	5.5
	23.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	8.1	5.6	8.2	5.5
	25.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	7.9	5.6	8.1	5.4
	27.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.6	5.6	7.8	5.5	8.0	5.4
	29.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.5	5.6	7.7	5.4	7.9	5.3
	31.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.4	5.5	7.6	5.4	7.8	5.3
	33.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.3	5.5	7.5	5.3	7.6	5.2
	35.0	4.8	4.2	5.7	4.9	6.6	5.4	7.1	5.5	7.2	5.4	7.4	5.3	7.5	5.2
	37.0	4.8	4.2	5.7	4.9	6.6	5.4	7.0	5.5	7.1	5.4	7.2	5.2	7.4	5.1
	39.0	4.8	4.2	5.7	4.9	6.6	5.4	6.9	5.4	7.0	5.3	7.1	5.1	7.3	5.0
80	10.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.8	7.4	11.4	7.4
	12.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.8	7.4	11.2	7.4
	14.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.8	7.4	11.1	7.3
	16.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.7	7.4	10.9	7.2
	18.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.6	7.3	10.8	7.2
	20.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.4	7.2	10.6	7.1
	21.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.4	7.2	10.6	7.1
	23.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.2	7.1	10.4	7.0
	25.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	10.1	7.0	10.3	6.9
	27.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.6	7.1	9.9	7.0	10.1	6.9
	29.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.5	7.1	9.8	6.9	10.0	6.8
	31.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.4	7.0	9.6	6.8	9.8	6.7
	33.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.3	7.0	9.5	6.7	9.7	6.7
	35.0	6.1	5.3	7.2	6.1	8.4	6.9	9.0	7.0	9.1	6.9	9.3	6.6	9.5	6.6
	37.0	6.1	5.3	7.2	6.1	8.4	6.9	8.9	6.9	9.0	6.8	9.2	6.6	9.4	6.5
	39.0	6.1	5.3	7.2	6.1	8.4	6.9	8.7	6.8	8.8	6.7	9.0	6.5	9.3	6.5
100	10.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	13.4	9.0	14.2	8.9
	12.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	13.4	9.0	14.0	8.9
	14.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	13.4	9.0	13.8	8.8
	16.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	13.3	9.0	13.6	8.7
	18.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	13.2	8.9	13.4	8.6
	20.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	13.0	8.8	13.2	8.5
	21.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	12.9	8.8	13.2	8.5
	23.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	12.7	8.7	13.0	8.4
	25.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	12.5	8.6	12.8	8.3
	27.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.7	12.3	8.5	12.6	8.2
	29.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.9	8.6	12.2	8.4	12.4	8.1
	31.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.7	8.5	12.0	8.3	12.2	8.0
	33.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.5	8.5	11.8	8.2	12.1	7.9
	35.0	7.6	6.4	9.0	7.3	10.5	8.3	11.2	8.5	11.3	8.4	11.6	8.1	11.9	7.8
	37.0	7.6	6.4	9.0	7.3	10.5	8.3	11.0	8.4	11.2	8.3	11.4	8.0	11.7	7.7
	39.0	7.6	6.4	9.0	7.3	10.5	8.3	10.8	8.3	11.0	8.2	11.2	7.9	11.5	7.6
125	10.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	16.7	11.1	17.7	11.1
	12.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	16.7	11.1	17.5	11.0
	14.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	16.7	11.1	17.2	10.9
	16.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	16.7	11.1	17.0	10.8
	18.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	16.4	11.0	16.8	10.7
	20.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	16.2	10.9	16.6	10.6
	21.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	16.1	10.9	16.4	10.5
	23.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	15.9	10.8	16.2	10.4
	25.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	15.6	10.6	16.0	10.3
	27.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.8	15.4	10.5	15.8	10.2
	29.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.9	10.7	15.2	10.4	15.5	10.1
	31.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.6	10.6	15.0	10.3	15.3	10.0
	33.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.4	10.5	14.7	10.2	15.1	9.8
	35.0	9.4	8.0	11.3	9.2	13.1	10.3	14.0	10.5	14.2	10.4	14.5	10.1	14.9	9.7
	37.0	9.4	8.0	11.3	9.2	13.1	10.3	13.8	10.4	13.9	10.3	14.3	10.0	14.6	9.6
	39.0	9.4	8.0	11.3	9.2	13.1	10.3	13.5	10.3	13.7	10.2	14.1	9.9	14.4	9.5
140	10.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	19.1	12.7	20.2	12.6
	12.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	19.1	12.7	20.0	12.5
	14.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	19.1	12.7	19.7	12.4
	16.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	19.1	12.7	19.4	12.3
	18.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	18.8	12.6	19.2	12.2
	20.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	18.5	12.4	18.9	12.1
	21.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	18.4	12.4	18.8	12.1
	23.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	18.1	12.3	18.5	12.0
	25.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	17.9	12.1	18.3	11.9
	27.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	17.6	12.0	18.0	11.8
	29.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	17.0	12.3	17.4	11.9	17.8	11.7
	31.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	16.7	12.1	17.1	11.8	17.5	11.6
	33.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	16.5	12.0	16.8	11.7	17.2	11.5
	35.0	10.8	9.0	12.9	10.4	15.0	11.7	16.0	12.0	16.2	11.9	16.6	11.5	17.0	11.3
	37.0	10.8	9.0	12.9	10.4	15.0	11.7	15.7	11.9	15.9	11.7	16.3	11.4	16.7	11.2
	39.0	10.8	9.0	12.9	10.4	15.0	11.7	15.5	11.8	15.7	11.6	16.1	11.3	16.5	11.1

3TW31182-1B

6 Capacity tables

6 - 2 Heating Capacity Tables

6

FXSQ-P								
Unit size	Outdoor air temp.		Indoor air temp.: °CDB					
			16.0	18.0	20.0	21.0	22.0	24.0
	°CDB	°CWB	KW	KW	KW	KW	KW	KW
20	-19.8	-20.0	1.5	1.5	1.5	1.5	1.5	1.5
	-18.8	-19.0	1.5	1.5	1.5	1.5	1.5	1.5
	-16.7	-17.0	1.6	1.6	1.6	1.6	1.6	1.6
	-14.7	-15.0	1.7	1.7	1.7	1.7	1.7	1.7
	-12.6	-13.0	1.8	1.8	1.8	1.8	1.8	1.8
	-10.5	-11.0	1.9	1.9	1.9	1.9	1.9	1.9
	-9.5	-10.0	1.9	1.9	1.9	1.9	1.9	1.9
	-8.5	-9.1	2.0	2.0	1.9	1.9	1.9	1.9
	-7.0	-7.6	2.0	2.0	2.0	2.0	2.0	2.0
	-5.0	-5.6	2.1	2.1	2.1	2.1	2.1	2.1
	-3.0	-3.7	2.2	2.2	2.2	2.2	2.2	2.2
	0.0	-0.7	2.3	2.3	2.3	2.3	2.3	2.2
	3.0	2.2	2.5	2.5	2.4	2.4	2.3	2.2
	5.0	4.1	2.5	2.5	2.5	2.4	2.3	2.2
	7.0	6.0	2.6	2.6	2.5	2.4	2.3	2.2
	9.0	7.9	2.7	2.7	2.5	2.4	2.3	2.2
11.0	9.8	2.8	2.7	2.5	2.4	2.3	2.2	
13.0	11.8	2.8	2.7	2.5	2.4	2.3	2.2	
15.0	13.7	2.8	2.7	2.5	2.4	2.3	2.2	
25	-19.8	-20.0	1.9	1.9	1.9	1.9	1.9	1.9
	-18.8	-19.0	1.9	1.9	1.9	1.9	1.9	1.9
	-16.7	-17.0	2.1	2.1	2.0	2.0	2.0	2.0
	-14.7	-15.0	2.2	2.2	2.2	2.2	2.2	2.1
	-12.6	-13.0	2.3	2.3	2.3	2.3	2.3	2.3
	-10.5	-11.0	2.4	2.4	2.4	2.4	2.4	2.4
	-9.5	-10.0	2.5	2.4	2.4	2.4	2.4	2.4
	-8.5	-9.1	2.5	2.5	2.5	2.5	2.5	2.5
	-7.0	-7.6	2.6	2.6	2.6	2.6	2.6	2.6
	-5.0	-5.6	2.7	2.7	2.7	2.7	2.7	2.7
	-3.0	-3.7	2.8	2.8	2.8	2.8	2.8	2.8
	0.0	-0.7	3.0	3.0	3.0	3.0	3.0	2.8
	3.0	2.2	3.1	3.1	3.1	3.1	3.0	2.8
	5.0	4.1	3.3	3.2	3.2	3.1	3.0	2.8
	7.0	6.0	3.4	3.4	3.2	3.1	3.0	2.8
	9.0	7.9	3.5	3.4	3.2	3.1	3.0	2.8
11.0	9.8	3.6	3.4	3.2	3.1	3.0	2.8	
13.0	11.8	3.6	3.4	3.2	3.1	3.0	2.8	
15.0	13.7	3.6	3.4	3.2	3.1	3.0	2.8	
32	-19.8	-20.0	2.4	2.4	2.3	2.3	2.3	2.3
	-18.8	-19.0	2.4	2.4	2.4	2.4	2.4	2.4
	-16.7	-17.0	2.6	2.6	2.6	2.6	2.6	2.5
	-14.7	-15.0	2.7	2.7	2.7	2.7	2.7	2.7
	-12.6	-13.0	2.9	2.8	2.8	2.8	2.8	2.8
	-10.5	-11.0	3.0	3.0	3.0	3.0	3.0	3.0
	-9.5	-10.0	3.1	3.1	3.1	3.1	3.0	3.0
	-8.5	-9.1	3.1	3.1	3.1	3.1	3.1	3.1
	-7.0	-7.6	3.2	3.2	3.2	3.2	3.2	3.2
	-5.0	-5.6	3.4	3.4	3.4	3.4	3.4	3.4
	-3.0	-3.7	3.5	3.5	3.5	3.5	3.5	3.5
	0.0	-0.7	3.7	3.7	3.7	3.7	3.7	3.5
	3.0	2.2	3.9	3.9	3.9	3.9	3.7	3.5
	5.0	4.1	4.1	4.1	4.0	3.9	3.7	3.5
	7.0	6.0	4.2	4.2	4.0	3.9	3.7	3.5
	9.0	7.9	4.3	4.3	4.0	3.9	3.7	3.5
11.0	9.8	4.5	4.3	4.0	3.9	3.7	3.5	
13.0	11.8	4.5	4.3	4.0	3.9	3.7	3.5	
15.0	13.7	4.5	4.3	4.0	3.9	3.7	3.5	
40	-19.8	-20.0	3.0	2.9	2.9	2.9	2.9	2.9
	-18.8	-19.0	3.0	3.0	3.0	3.0	3.0	3.0
	-16.7	-17.0	3.2	3.2	3.2	3.2	3.2	3.2
	-14.7	-15.0	3.4	3.4	3.4	3.4	3.4	3.4
	-12.6	-13.0	3.6	3.6	3.6	3.5	3.5	3.5
	-10.5	-11.0	3.7	3.7	3.7	3.7	3.7	3.7
	-9.5	-10.0	3.8	3.8	3.8	3.8	3.8	3.8
	-8.5	-9.1	3.9	3.9	3.9	3.9	3.9	3.9
	-7.0	-7.6	4.0	4.0	4.0	4.0	4.0	4.0
	-5.0	-5.6	4.2	4.2	4.2	4.2	4.2	4.2
	-3.0	-3.7	4.4	4.4	4.4	4.4	4.4	4.4
	0.0	-0.7	4.7	4.6	4.6	4.6	4.6	4.4
	3.0	2.2	4.9	4.9	4.9	4.8	4.7	4.4
	5.0	4.1	5.1	5.1	5.0	4.8	4.7	4.4
	7.0	6.0	5.2	5.2	5.0	4.8	4.7	4.4
	9.0	7.9	5.4	5.3	5.0	4.8	4.7	4.4
11.0	9.8	5.6	5.3	5.0	4.8	4.7	4.4	
13.0	11.8	5.6	5.3	5.0	4.8	4.7	4.4	
15.0	13.7	5.6	5.3	5.0	4.8	4.7	4.4	
50	-19.8	-20.0	3.7	3.7	3.7	3.7	3.7	3.7
	-18.8	-19.0	3.8	3.8	3.8	3.8	3.8	3.8
	-16.7	-17.0	4.1	4.0	4.0	4.0	4.0	4.0
	-14.7	-15.0	4.3	4.3	4.3	4.2	4.2	4.2
	-12.6	-13.0	4.5	4.5	4.5	4.5	4.5	4.5
	-10.5	-11.0	4.7	4.7	4.7	4.7	4.7	4.7
	-9.5	-10.0	4.8	4.8	4.8	4.8	4.8	4.8
	-8.5	-9.1	4.9	4.9	4.9	4.9	4.9	4.9
	-7.0	-7.6	5.1	5.1	5.1	5.1	5.1	5.1
	-5.0	-5.6	5.3	5.3	5.3	5.3	5.3	5.3
	-3.0	-3.7	5.5	5.5	5.5	5.5	5.5	5.5
	0.0	-0.7	5.9	5.9	5.8	5.8	5.8	5.5
	3.0	2.2	6.2	6.2	6.2	6.1	5.9	5.5
	5.0	4.1	6.4	6.4	6.3	6.1	5.9	5.5
	7.0	6.0	6.6	6.6	6.3	6.1	5.9	5.5
	9.0	7.9	6.8	6.7	6.3	6.1	5.9	5.5
11.0	9.8	7.0	6.7	6.3	6.1	5.9	5.5	
13.0	11.8	7.1	6.7	6.3	6.1	5.9	5.5	
15.0	13.7	7.1	6.7	6.3	6.1	5.9	5.5	

3TW25512-2B

6 Capacity tables

6 - 2 Heating Capacity Tables

FXSQ-P								
Unit size	Outdoor air temp.		Indoor air temp.: °CDB					
			16.0	18.0	20.0	21.0	22.0	24.0
	°CDB	°CWB	KW	KW	KW	KW	KW	KW
63	-19.8	-20.0	4.7	4.7	4.7	4.7	4.7	4.7
	-18.8	-19.0	4.9	4.9	4.8	4.8	4.8	4.8
	-16.7	-17.0	5.1	5.1	5.1	5.1	5.1	5.1
	-14.7	-15.0	5.4	5.4	5.4	5.4	5.4	5.4
	-12.6	-13.0	5.7	5.7	5.7	5.7	5.7	5.7
	-10.5	-11.0	6.0	6.0	6.0	6.0	6.0	5.9
	-9.5	-10.0	6.1	6.1	6.1	6.1	6.1	6.1
	-8.5	-9.1	6.3	6.3	6.2	6.2	6.2	6.2
	-7.0	-7.6	6.5	6.5	6.4	6.4	6.4	6.4
	-5.0	-5.6	6.8	6.7	6.7	6.7	6.7	6.7
	-3.0	-3.7	7.0	7.0	7.0	7.0	7.0	7.0
	0.0	-0.7	7.5	7.4	7.4	7.4	7.4	7.0
	3.0	2.2	7.9	7.8	7.8	7.7	7.5	7.0
	5.0	4.1	8.1	8.1	8.0	7.7	7.5	7.0
	7.0	6.0	8.4	8.4	8.0	7.7	7.5	7.0
	9.0	7.9	8.7	8.5	8.0	7.7	7.5	7.0
11.0	9.8	8.9	8.5	8.0	7.7	7.5	7.0	
13.0	11.8	9.0	8.5	8.0	7.7	7.5	7.0	
15.0	13.7	9.0	8.5	8.0	7.7	7.5	7.0	
80	-19.8	-20.0	5.9	5.9	5.9	5.9	5.9	5.8
	-18.8	-19.0	6.1	6.1	6.0	6.0	6.0	6.0
	-16.7	-17.0	6.4	6.4	6.4	6.4	6.4	6.4
	-14.7	-15.0	6.8	6.8	6.8	6.7	6.7	6.7
	-12.6	-13.0	7.1	7.1	7.1	7.1	7.1	7.1
	-10.5	-11.0	7.5	7.5	7.5	7.5	7.4	7.4
	-9.5	-10.0	7.7	7.7	7.6	7.6	7.6	7.6
	-8.5	-9.1	7.8	7.8	7.8	7.8	7.8	7.8
	-7.0	-7.6	8.1	8.1	8.1	8.1	8.0	8.0
	-5.0	-5.6	8.4	8.4	8.4	8.4	8.4	8.4
	-3.0	-3.7	8.8	8.8	8.7	8.7	8.7	8.7
	0.0	-0.7	9.3	9.3	9.3	9.3	9.3	8.7
	3.0	2.2	9.8	9.8	9.8	9.7	9.4	8.7
	5.0	4.1	10.2	10.1	10.0	9.7	9.4	8.7
	7.0	6.0	10.5	10.5	10.0	9.7	9.4	8.7
	9.0	7.9	10.8	10.6	10.0	9.7	9.4	8.7
11.0	9.8	11.2	10.6	10.0	9.7	9.4	8.7	
13.0	11.8	11.3	10.6	10.0	9.7	9.4	8.7	
15.0	13.7	11.3	10.6	10.0	9.7	9.4	8.7	
100	-19.8	-20.0	7.4	7.4	7.3	7.3	7.3	7.3
	-18.8	-19.0	7.6	7.6	7.5	7.5	7.5	7.5
	-16.7	-17.0	8.0	8.0	8.0	8.0	8.0	8.0
	-14.7	-15.0	8.5	8.5	8.4	8.4	8.4	8.4
	-12.6	-13.0	8.9	8.9	8.9	8.9	8.9	8.8
	-10.5	-11.0	9.4	9.3	9.3	9.3	9.3	9.3
	-9.5	-10.0	9.6	9.6	9.5	9.5	9.5	9.5
	-8.5	-9.1	9.8	9.8	9.7	9.7	9.7	9.7
	-7.0	-7.6	10.1	10.1	10.1	10.1	10.1	10.0
	-5.0	-5.6	10.6	10.5	10.5	10.5	10.5	10.5
	-3.0	-3.7	11.0	11.0	10.9	10.9	10.9	10.9
	0.0	-0.7	11.6	11.6	11.6	11.6	11.6	10.9
	3.0	2.2	12.3	12.3	12.2	12.1	11.7	10.9
	5.0	4.1	12.7	12.7	12.5	12.1	11.7	10.9
	7.0	6.0	13.1	13.1	12.5	12.1	11.7	10.9
	9.0	7.9	13.5	13.3	12.5	12.1	11.7	10.9
11.0	9.8	14.0	13.3	12.5	12.1	11.7	10.9	
13.0	11.8	14.1	13.3	12.5	12.1	11.7	10.9	
15.0	13.7	14.1	13.3	12.5	12.1	11.7	10.9	
125	-19.8	-20.0	9.4	9.4	9.4	9.4	9.4	9.3
	-18.8	-19.0	9.7	9.7	9.7	9.7	9.6	9.6
	-16.7	-17.0	10.3	10.3	10.2	10.2	10.2	10.2
	-14.7	-15.0	10.9	10.8	10.8	10.8	10.8	10.7
	-12.6	-13.0	11.4	11.4	11.4	11.4	11.3	11.3
	-10.5	-11.0	12.0	12.0	11.9	11.9	11.9	11.9
	-9.5	-10.0	12.3	12.2	12.2	12.2	12.2	12.2
	-8.5	-9.1	12.5	12.5	12.5	12.5	12.4	12.4
	-7.0	-7.6	13.0	12.9	12.9	12.9	12.9	12.8
	-5.0	-5.6	13.5	13.5	13.5	13.4	13.4	13.4
	-3.0	-3.7	14.1	14.0	14.0	14.0	14.0	13.9
	0.0	-0.7	14.9	14.9	14.8	14.8	14.8	13.9
	3.0	2.2	15.7	15.7	15.7	15.5	15.0	13.9
	5.0	4.1	16.3	16.2	16.0	15.5	15.0	13.9
	7.0	6.0	16.8	16.8	16.0	15.5	15.0	13.9
	9.0	7.9	17.3	17.0	16.0	15.5	15.0	13.9
11.0	9.8	17.9	17.0	16.0	15.5	15.0	13.9	
13.0	11.8	18.1	17.0	16.0	15.5	15.0	13.9	
15.0	13.7	18.1	17.0	16.0	15.5	15.0	13.9	
140	-19.8	-20.0	10.6	10.6	10.6	10.6	10.5	10.5
	-18.8	-19.0	10.9	10.9	10.9	10.9	10.9	10.8
	-16.7	-17.0	11.6	11.6	11.5	11.5	11.5	11.5
	-13.7	-15.0	12.2	12.2	12.2	12.1	12.1	12.1
	-11.8	-13.0	12.9	12.8	12.8	12.8	12.8	12.7
	-9.8	-11.0	13.5	13.5	13.4	13.4	13.4	13.4
	-9.5	-10.0	13.8	13.8	13.7	13.7	13.7	13.7
	-8.5	-9.1	14.1	14.1	14.0	14.0	14.0	14.0
	-7.0	-7.6	14.6	14.5	14.5	14.5	14.5	14.4
	-5.0	-5.6	15.2	15.2	15.1	15.1	15.1	15.1
	-3.0	-3.7	15.8	15.8	15.7	15.7	15.7	15.7
	0.0	-0.7	16.8	16.7	16.7	16.7	16.7	15.7
	3.0	2.2	17.7	17.7	17.6	17.4	16.8	15.7
	5.0	4.1	18.3	18.3	18.0	17.4	16.8	15.7
	7.0	6.0	18.9	18.9	18.0	17.4	16.8	15.7
	9.0	7.9	19.5	19.2	18.0	17.4	16.8	15.7
11.0	9.8	20.1	19.2	18.0	17.4	16.8	15.7	
13.0	11.8	20.3	19.2	18.0	17.4	16.8	15.7	
15.0	13.7	20.3	19.2	18.0	17.4	16.8	15.7	


3TW25512-2B

7 Dimensional drawings

7 - 1 Dimensional Drawings


7

FXSQ20-32P

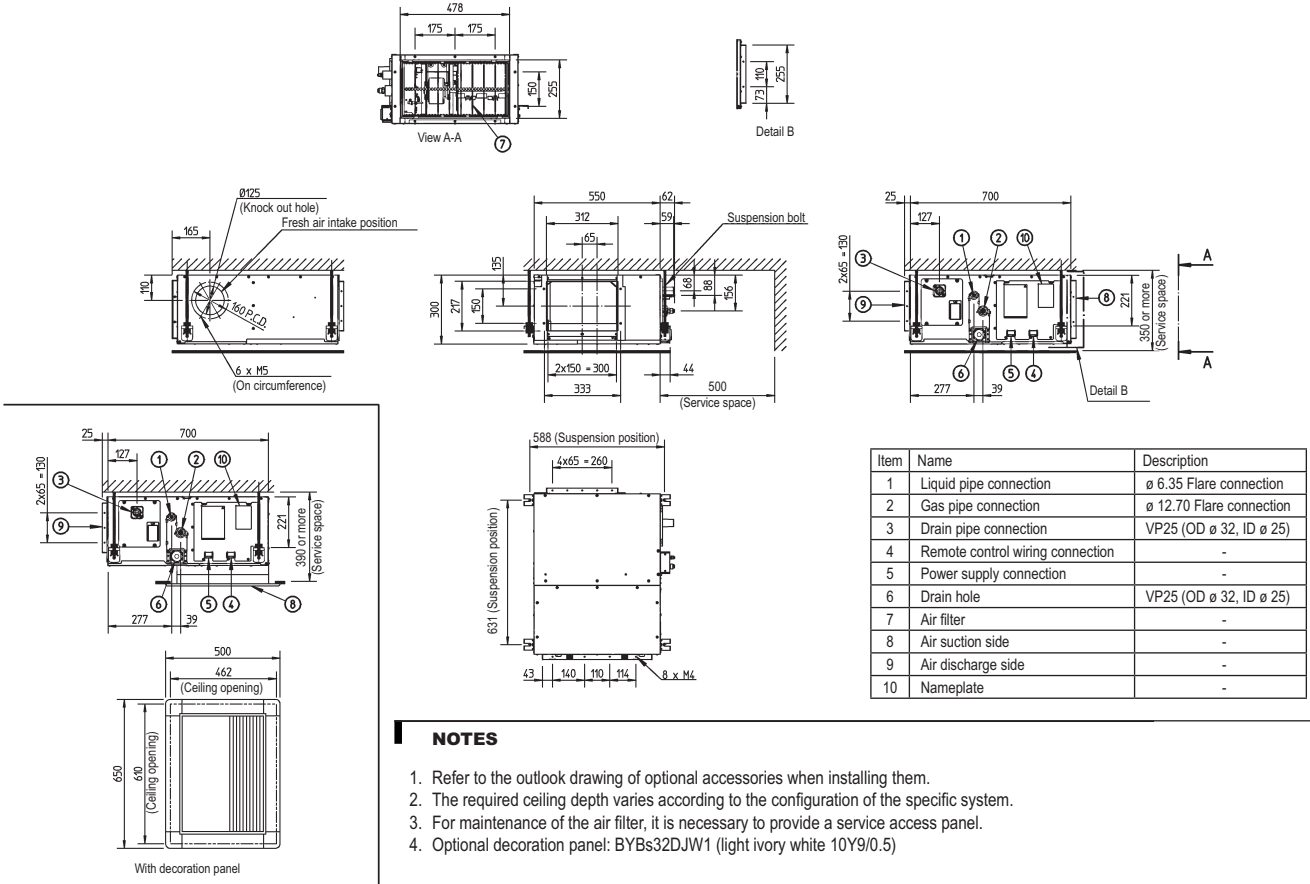

3TW31184-1B

FXSQ40-50P

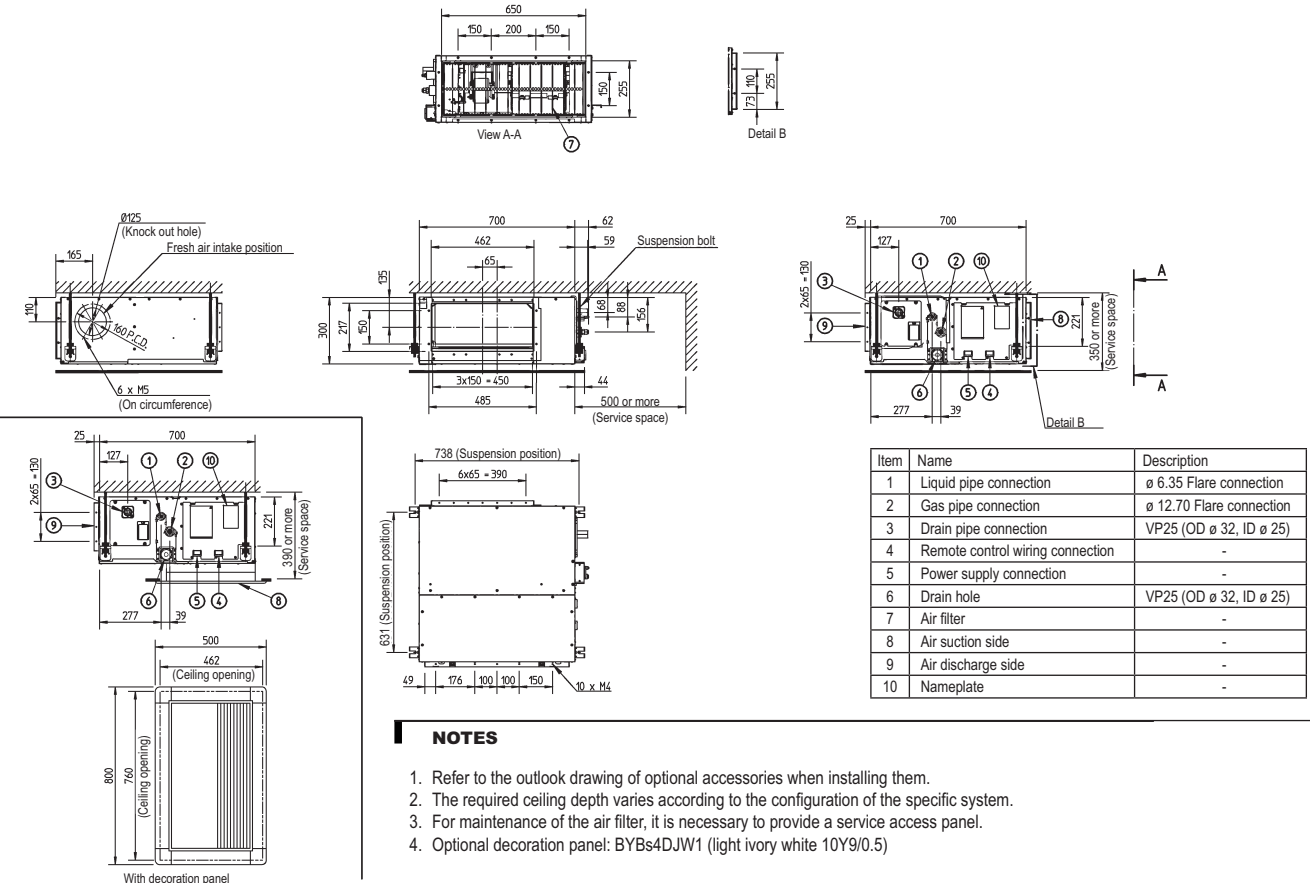

3TW31214-1B

7 Dimensional drawings

7 - 1 Dimensional Drawings

FXSQ63-80P

Item	Name	Description
1	Liquid pipe connection	ø 9.52 Flare connection
2	Gas pipe connection	ø 15.90 Flare connection
3	Drain pipe connection	VP25 (OD ø 32, ID ø 25)
4	Remote control wiring connection	-
5	Power supply connection	-
6	Drain hole	VP25 (OD ø 32, ID ø 25)
7	Air filter	-
8	Air suction side	-
9	Air discharge side	-
10	Nameplate	-

NOTES

1. Refer to the outlook drawing of optional accessories when installing them.
2. The required ceiling depth varies according to the configuration of the specific system.
3. For maintenance of the air filter, it is necessary to provide a service access panel.
4. Optional decoration panel: BYBs71DJW1 (light ivory white 10Y9/0.5)

3TW31234-1B

FXSQ100-140P

Item	Name	Description
1	Liquid pipe connection	ø 9.52 Flare connection
2	Gas pipe connection	ø 15.90 Flare connection
3	Drain pipe connection	VP25 (OD ø 32, ID ø 25)
4	Remote control wiring connection	-
5	Power supply connection	-
6	Drain hole	VP25 (OD ø 32, ID ø 25)
7	Air filter	-
8	Air suction side	-
9	Air discharge side	-
10	Nameplate	-

NOTES



1. Refer to the outlook drawing of optional accessories when installing them.
2. The required ceiling depth varies according to the configuration of the specific system.
3. For maintenance of the air filter, it is necessary to provide a service access panel.
4. Optional decoration panel: BYBs125DJW1 (light ivory white 10Y9/0.5)

3TW31254-1B

8 Centre of gravity

8 - 1 Centre of Gravity

FXSQ-P

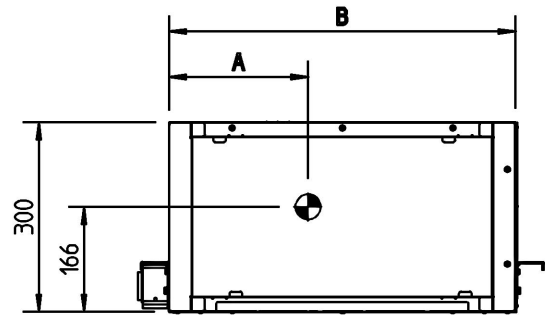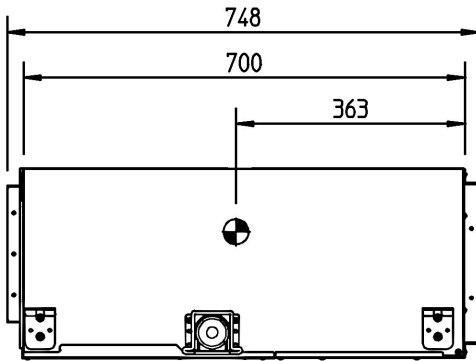


Model	A	B
FXSQ20~32	220	550
FXSQ40,50	283	700
FXSQ63,80	441	1000
FXSQ100,125,140	619	1400

4TW31189-1B

9 Piping diagrams


9 - 1 Piping Diagrams

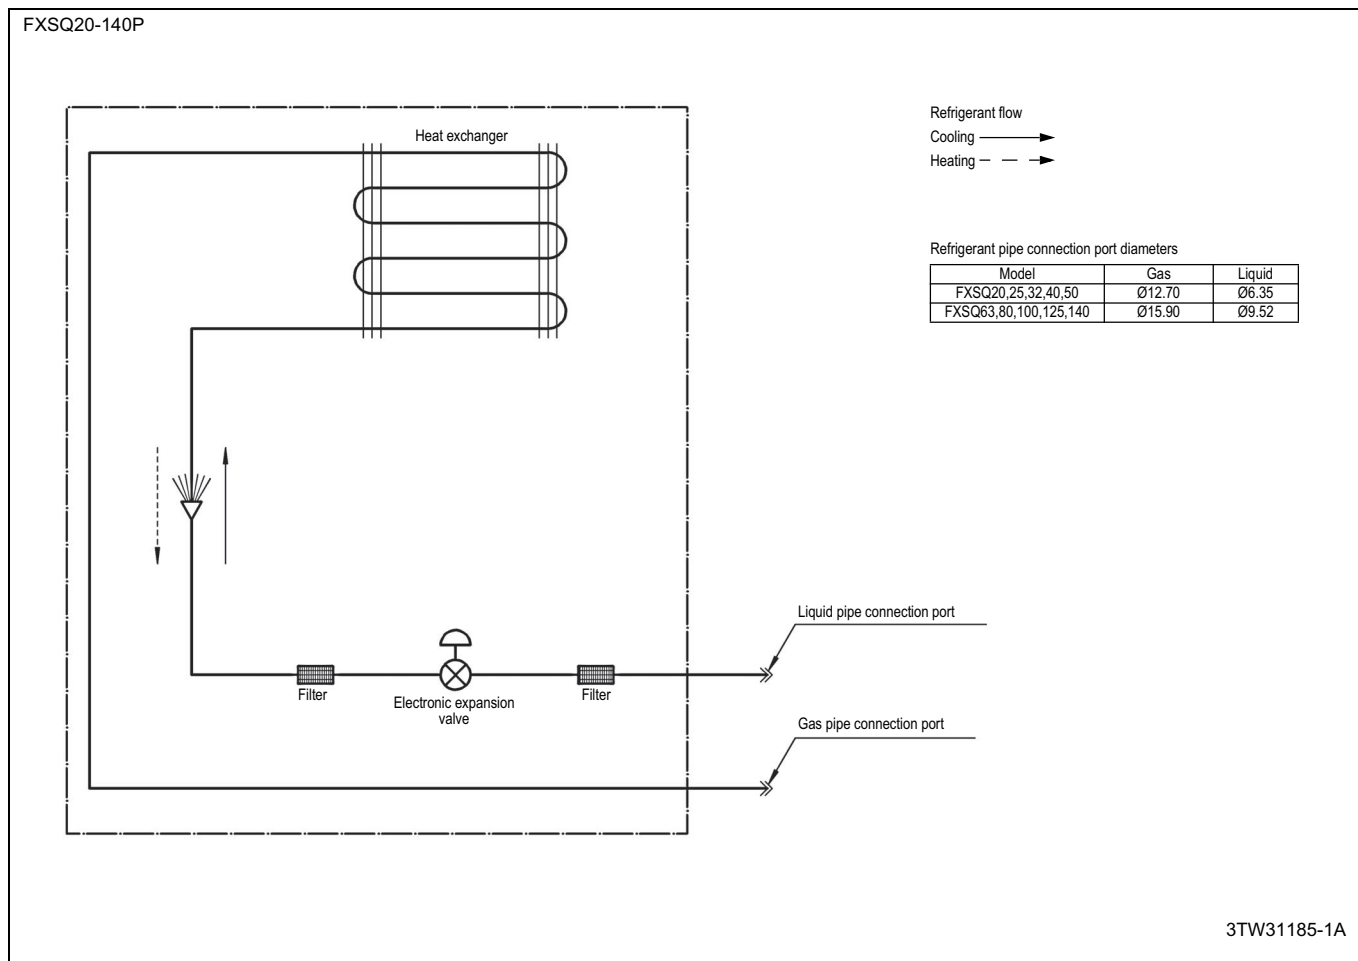

10 Wiring diagrams

10 - 1 Wiring Diagrams - Single Phase

10

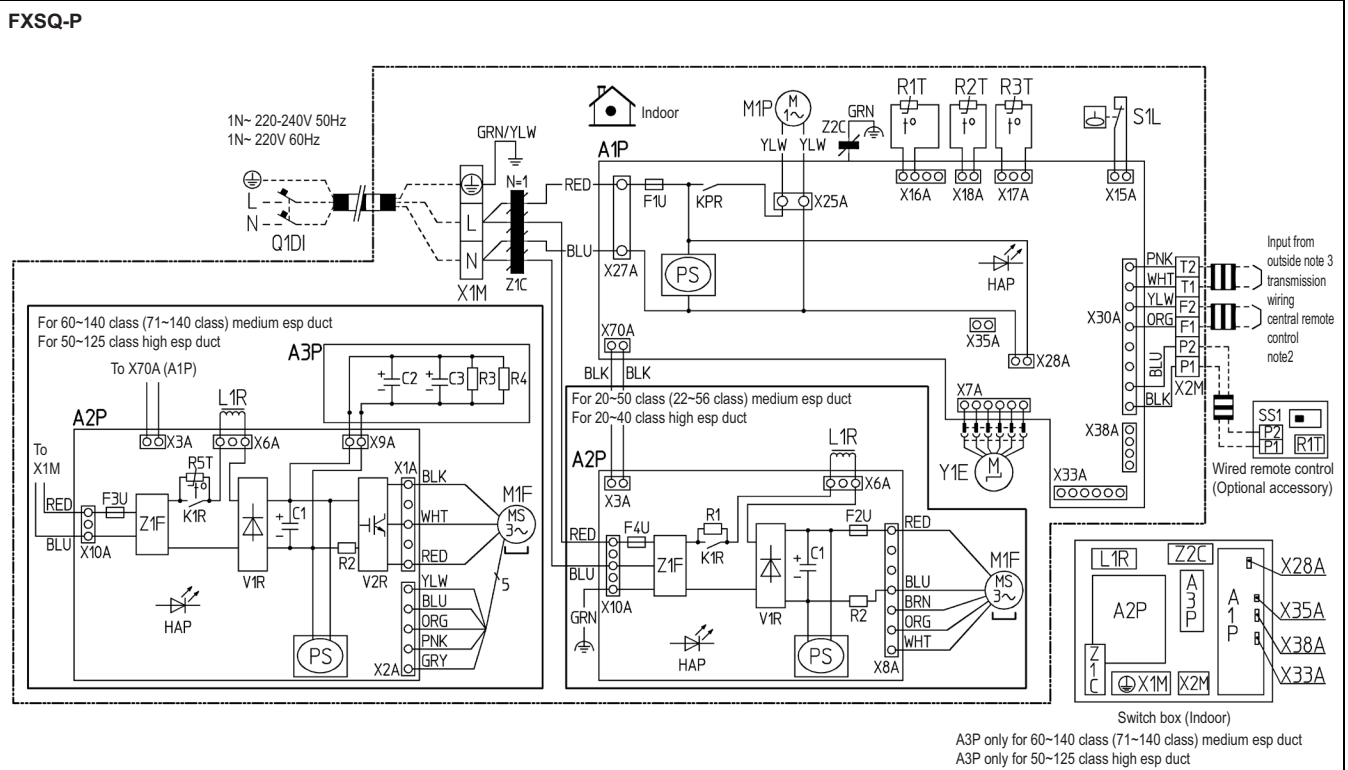

Indoor Unit			
A1P	Printed circuit board	R2T	Thermistor (Liquid)
A2P	Printed circuit board (Fan)	R3T	Thermistor (Gas)
A3P	Printed circuit board (Capacitor)	R5T	Thermistor NTC (Current limiting)
C1,C2,C3	Capacitor	S1L	Float switch
F1U	Fuse (T, 3.15A, 250V)	V1R	Diode bridge
F2U	Fuse (T, 5A, 250V)	V2R	Power module
F3U	Fuse (T, 6.3A, 250V)	X1M	Terminal strip (Power supply)
F4U	Fuse (T, 6.3A, 250V)	X2M	Terminal strip (Control)
HAP	Light emitting diode (Service monitor-green)	Y1E	Electronic expansion valve
KPR, K1R	Magnetic relay	Z1C, Z2C	Noise filter (Ferrite core)
L1R	Reactor	Z1F	Noise filter
M1F	Motor fan	Connector optional accessory	
M1P	Motor (Drain pump)	X28A	Connector (Power supply for wiring)
PS	Switching power supply	X33A	Connector (For wiring)
Q1DI	Earth leak detector	X35A	Connector (Adapter)
R1	Resistor (Current limiting)	X38A	Connector (For wiring)
R2	Current sensing device	Wired remote control	
R3, R4	Resistor (Electric discharge)	R1T	Thermistor (Air)
R1T	Thermistor (Suction air)	SS1	Selector switch (Main/sub)

: Field wiring
 L : Live
 N : Neutral
 : Connector
 : Wire clamp
 : Protective earth (screw)

Colors:

BLK	Black	PNK	Pink
BLU	Blue	RED	Red
BRN	Brown	WHT	White
GRY	Grey	YLW	Yellow
ORG	Orange	GRN	Green


2TW32656-1

NOTES

- Use copper conductors only.
- When using the central remote control, see manual for connection to the unit.
- When connecting the input wires from outside, forced 'off' or 'on/off' operation can be selected by the remote control. See installation manual for more details.


11 Sound data

11 - 1 Sound Power Spectrum

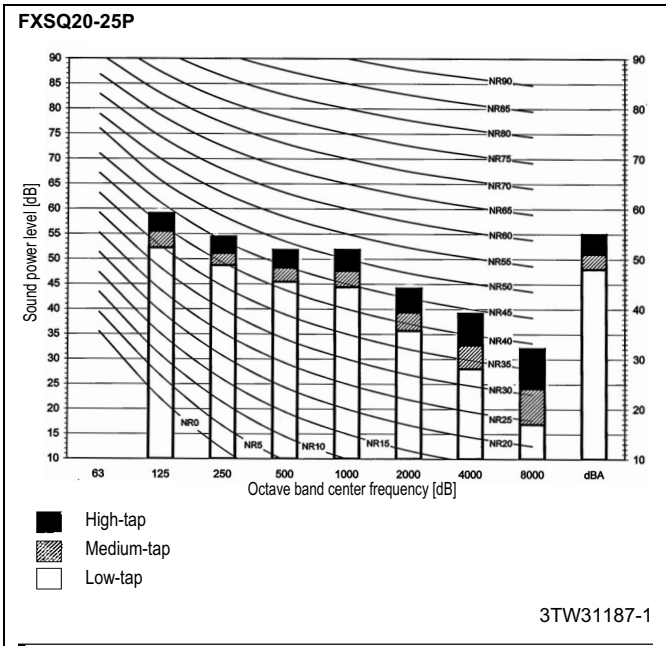


Notes

- 1 dBA = A-weighted sound power level. (A-scale according to IEC)
- 2 Reference acoustic intensity $0\text{dB} = 10\text{E-}6\mu\text{W/m}^2$
- 3 Measured according to ISO 3744

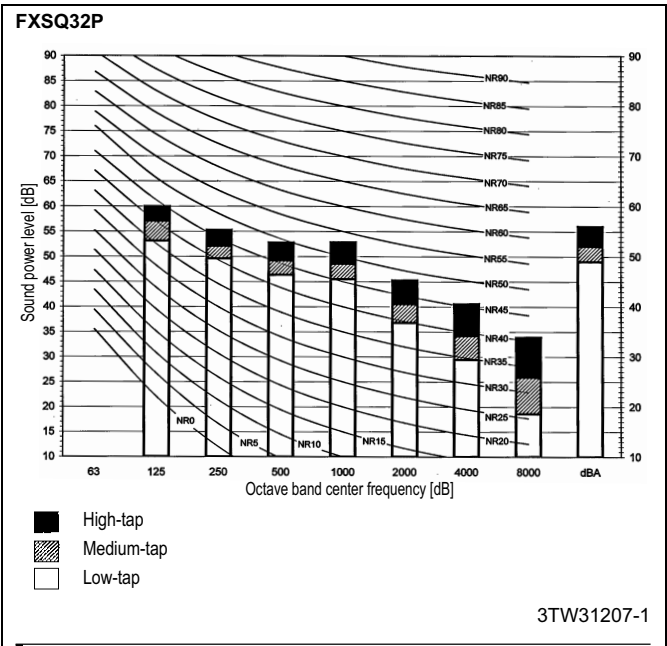


Notes

- 1 dBA = A-weighted sound power level. (A-scale according to IEC)
- 2 Reference acoustic intensity $0\text{dB} = 10\text{E-}6\mu\text{W/m}^2$
- 3 Measured according to ISO 3744

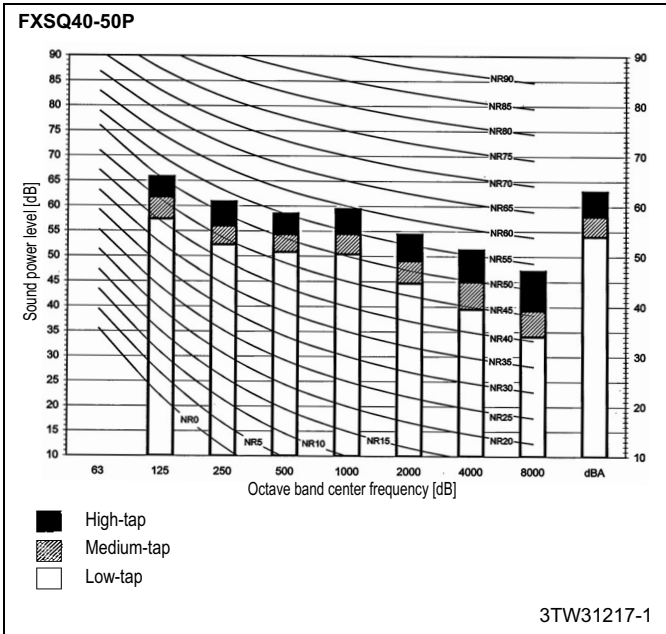

Notes

- 1 dBA = A-weighted sound power level. (A-scale according to IEC)
- 2 Reference acoustic intensity $0\text{dB} = 10\text{E-}6\mu\text{W/m}^2$
- 3 Measured according to ISO 3744

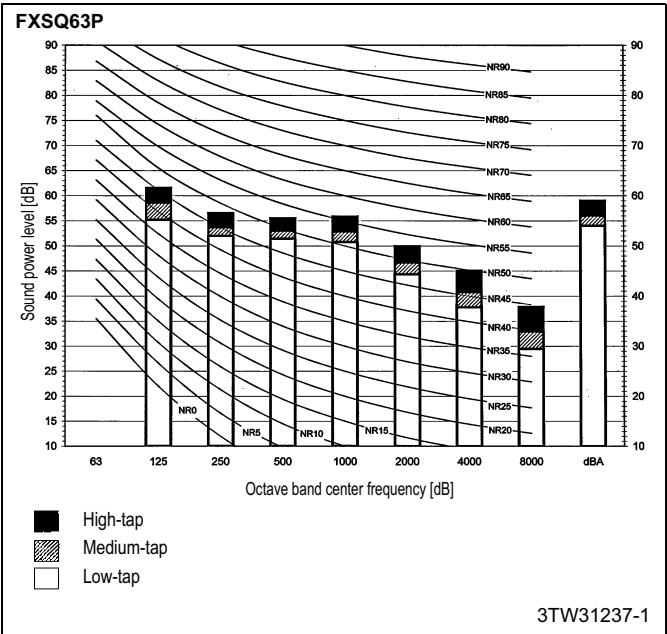





Notes

- 1 dBA = A-weighted sound power level. (A-scale according to IEC)
- 2 Reference acoustic intensity $0\text{dB} = 10\text{E-}6\mu\text{W/m}^2$
- 3 Measured according to ISO 3744

11 Sound data





11 - 1 Sound Power Spectrum

11

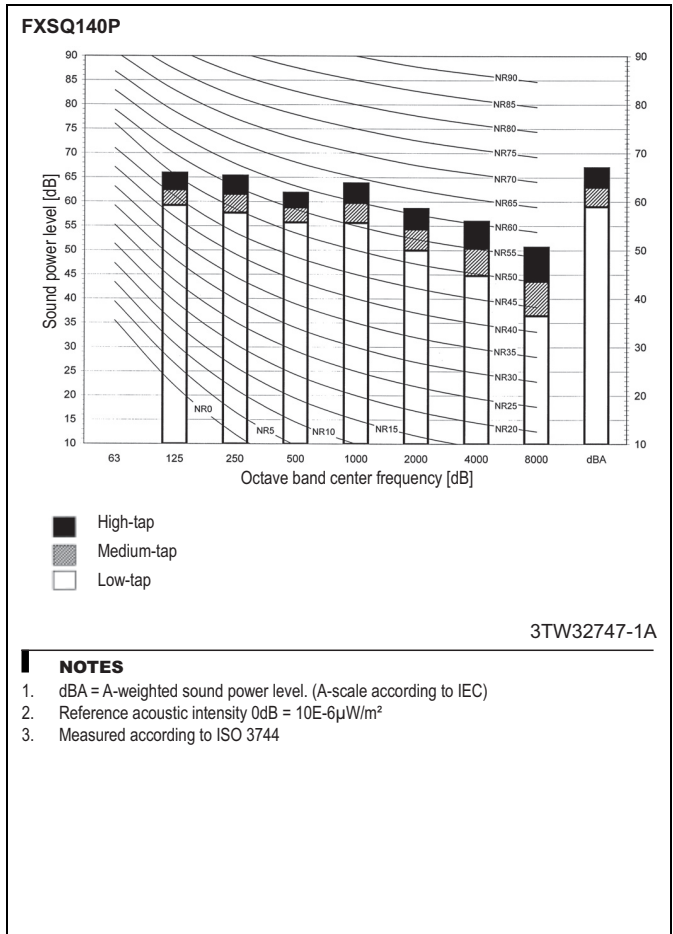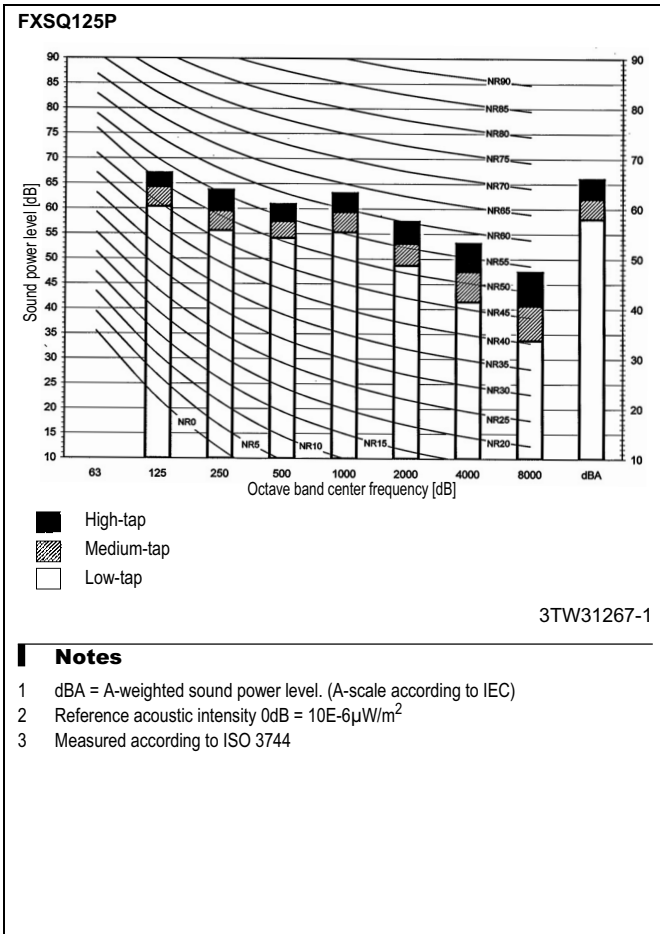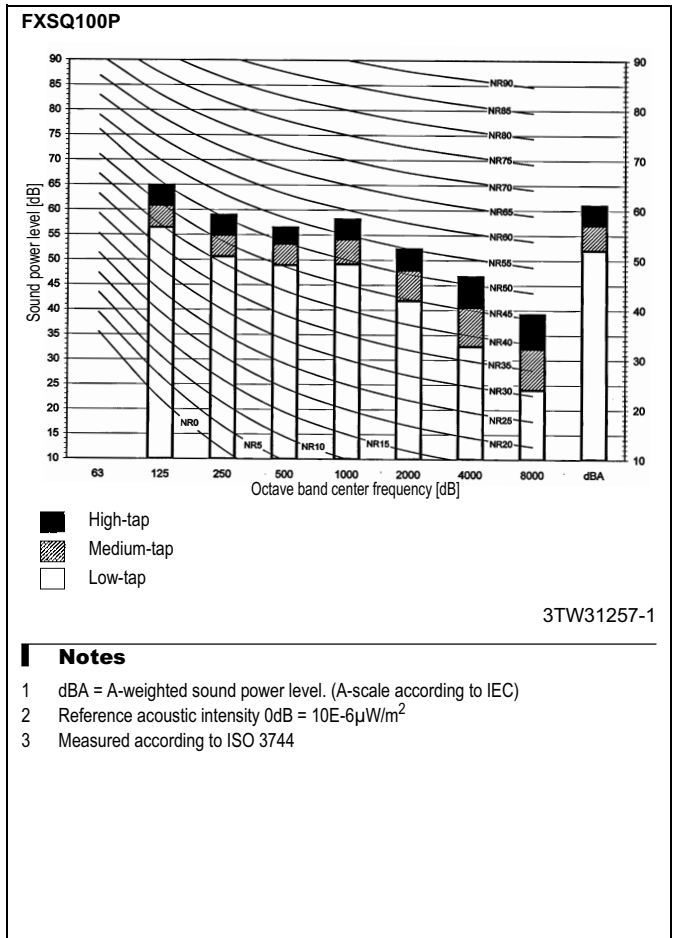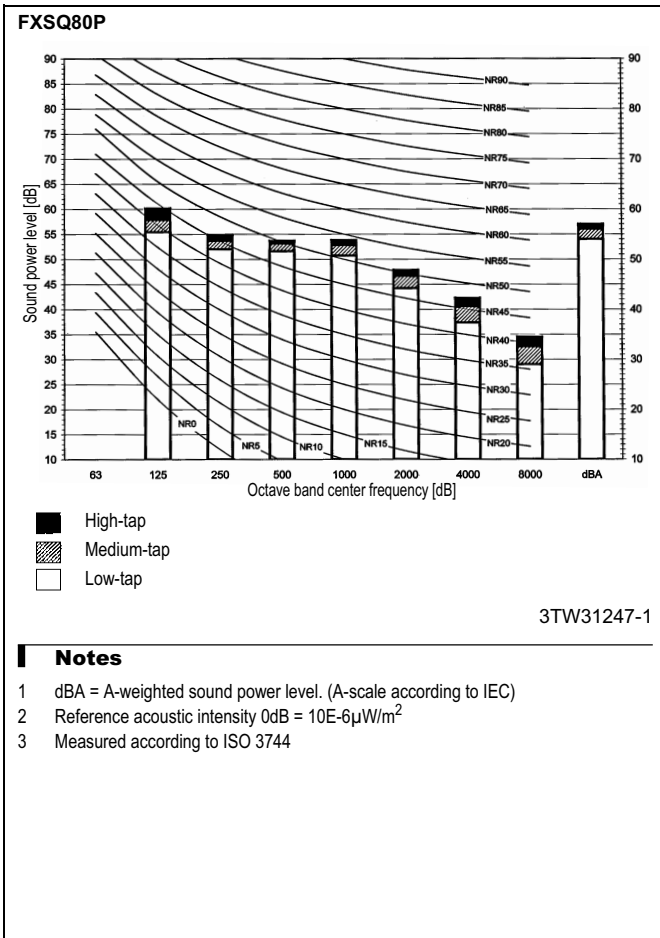





11 Sound data

11 - 2 Sound Pressure Spectrum

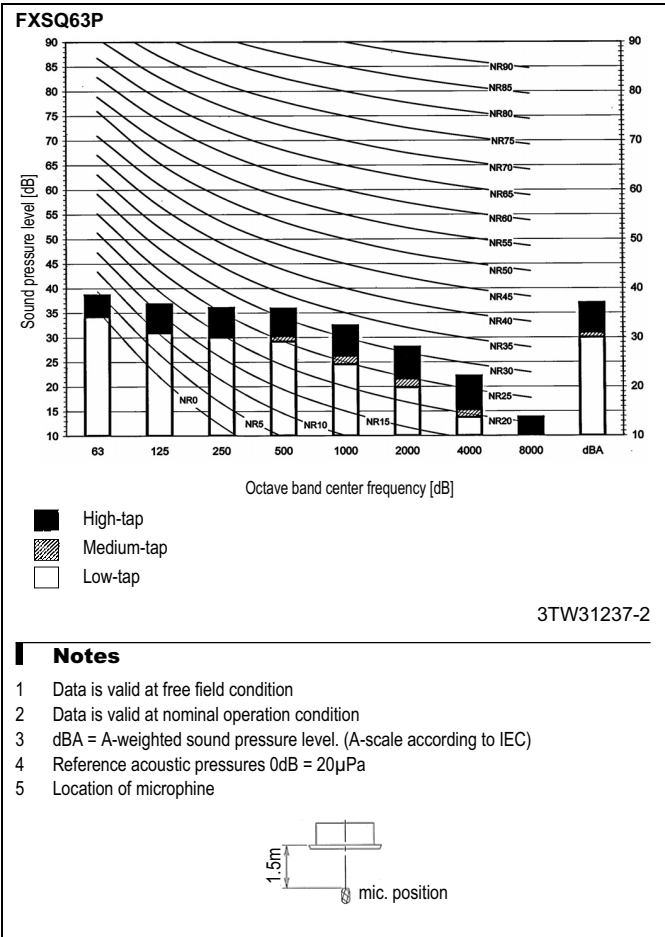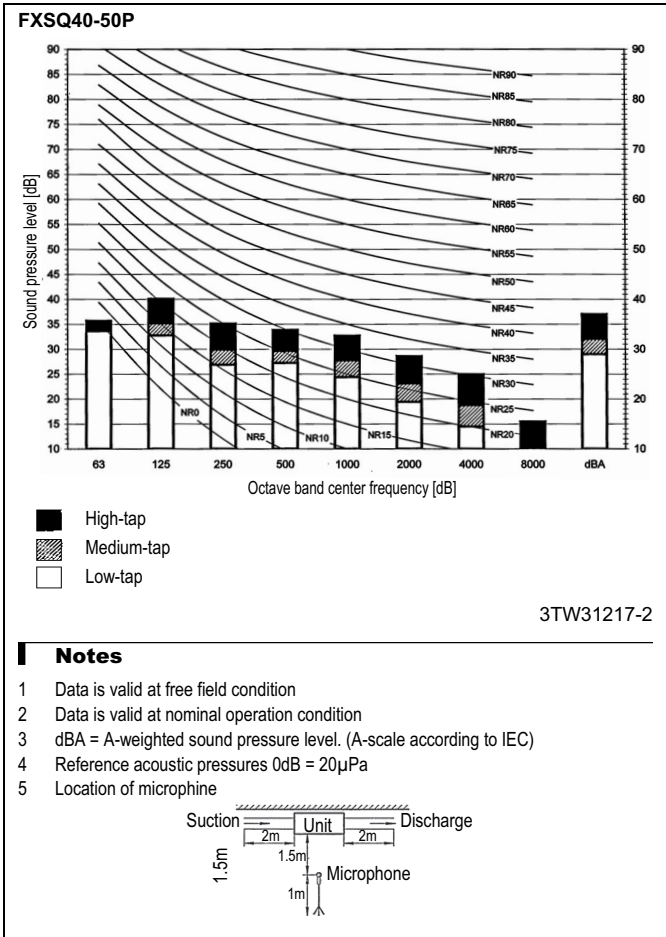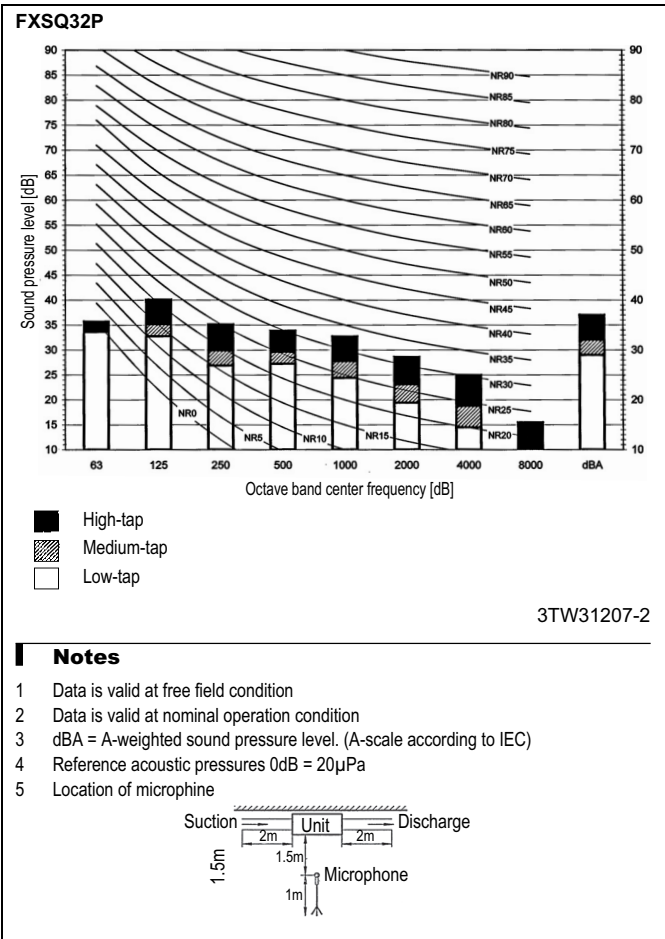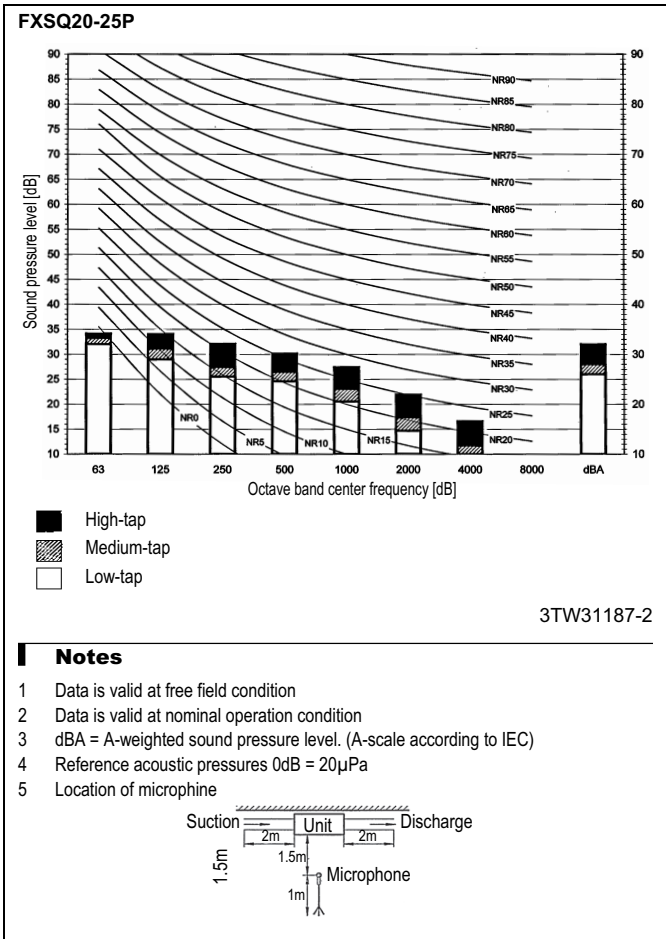

11 Sound data




11 - 2 Sound Pressure Spectrum

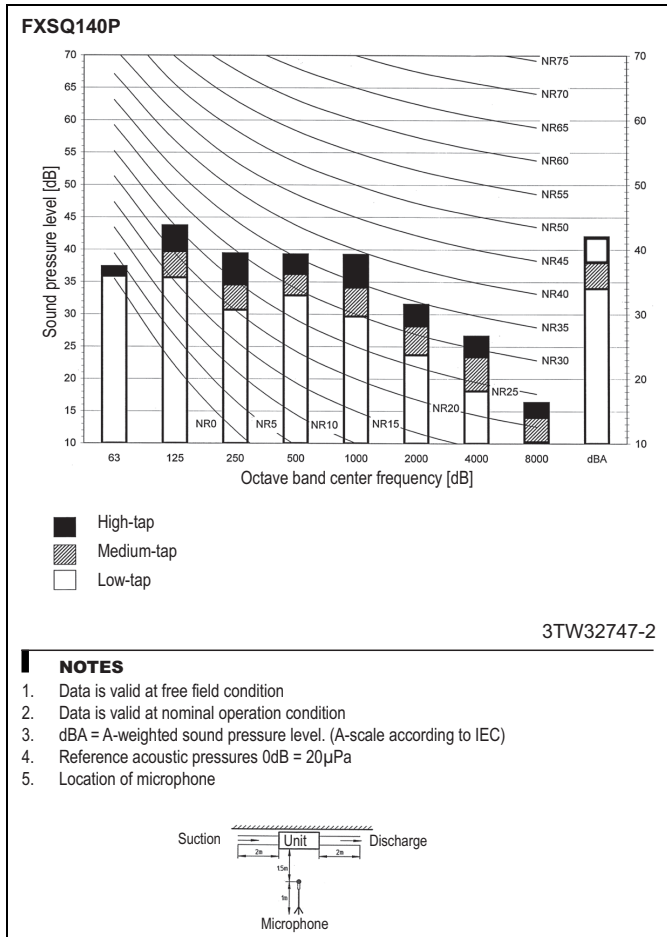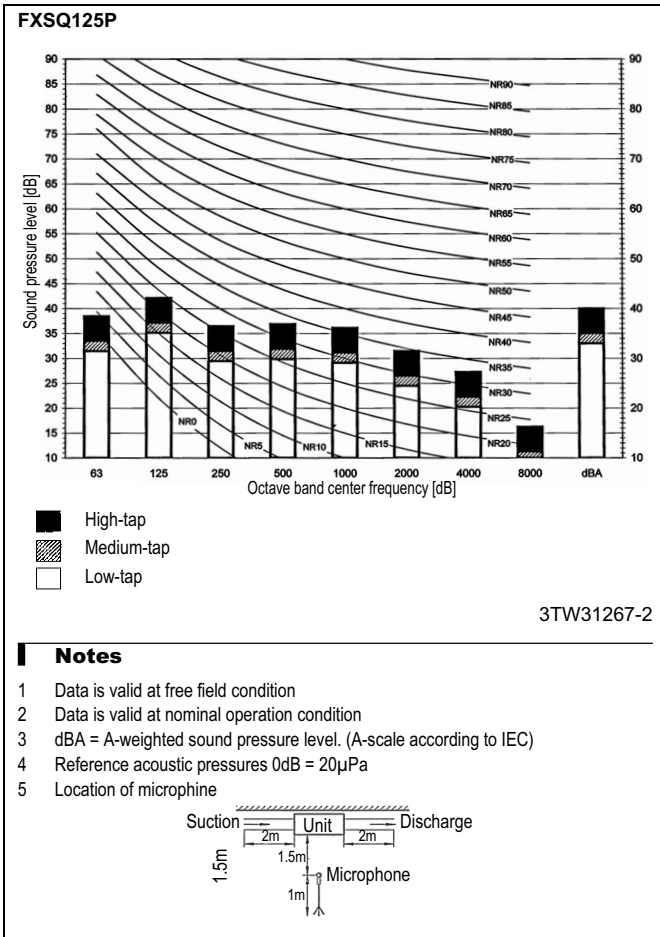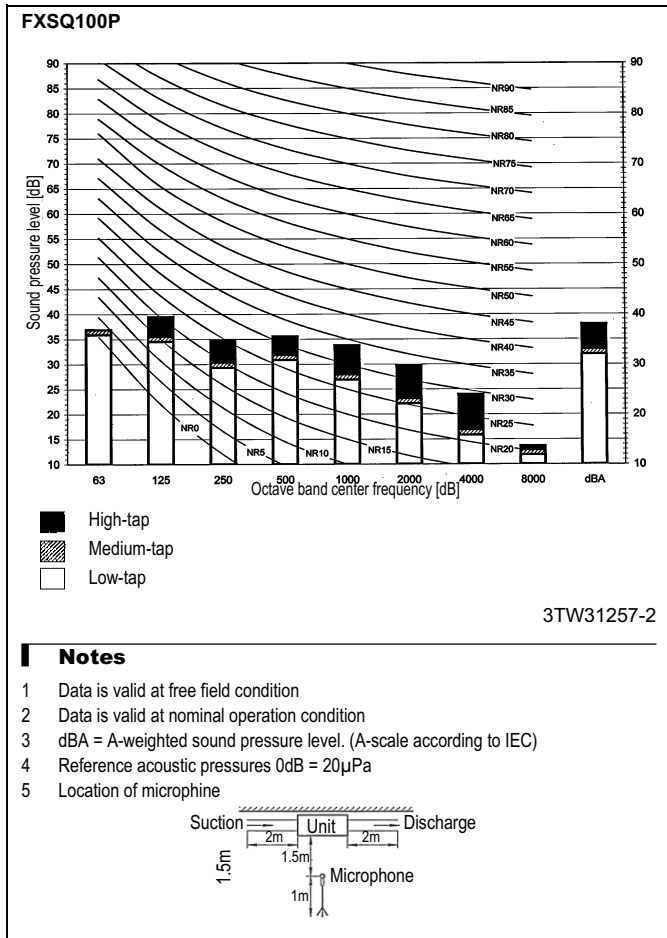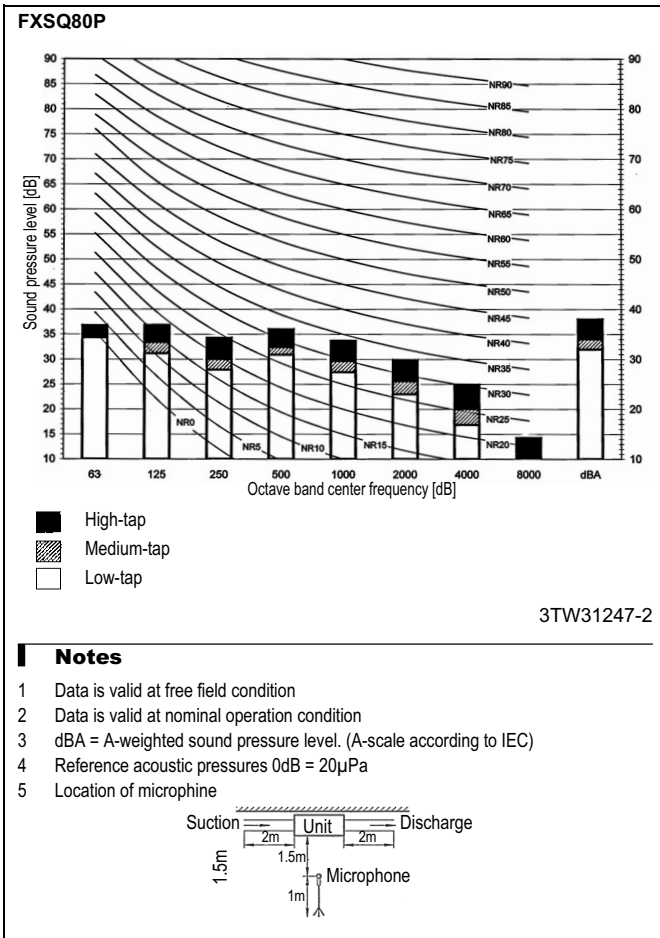

12 Fan characteristics

12 - 1 Fan Characteristics

FXSQ20-25P

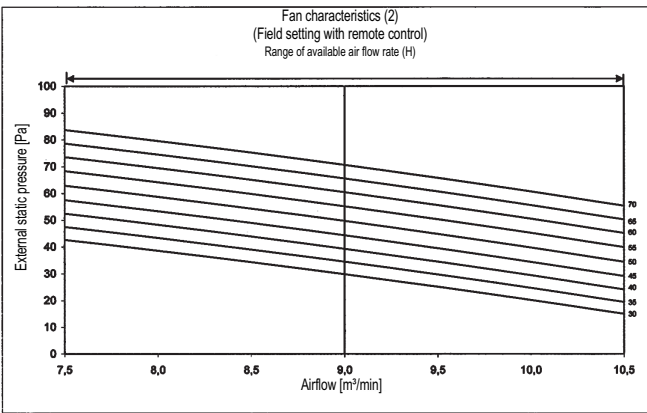
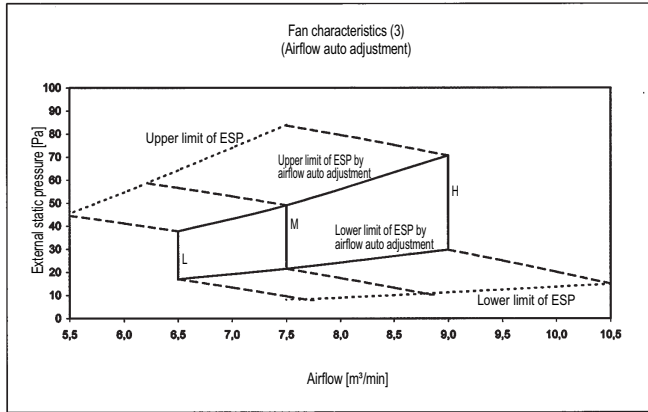
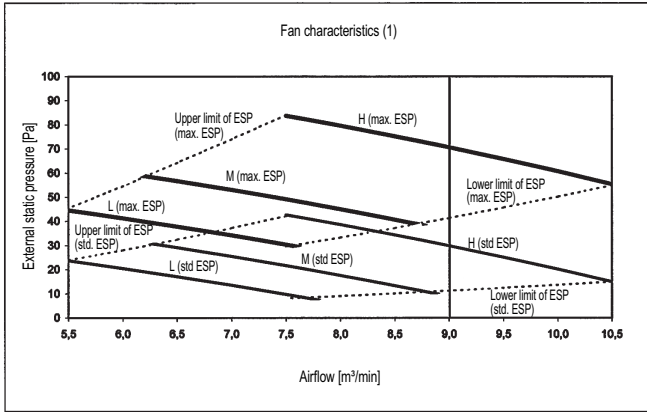


NOTES

- 1 Fan characteristics as shown ar in "fan only" mode.
- 2 ESP: External static pressure

3TW31188-1

FXSQ32P

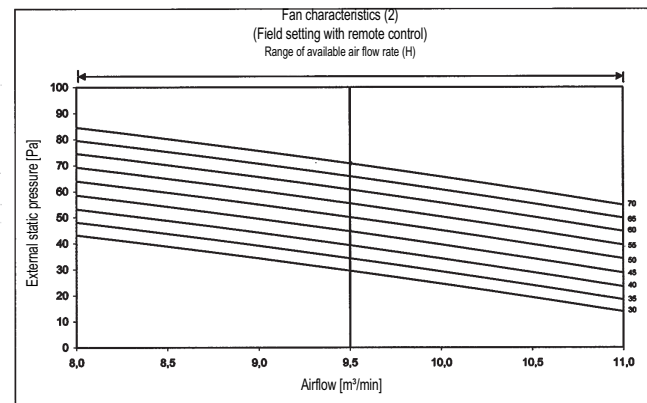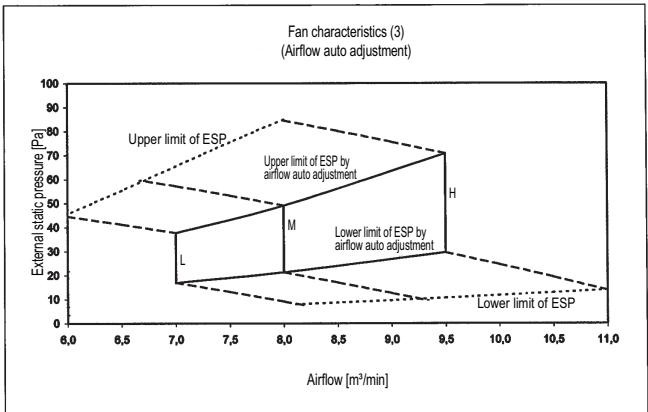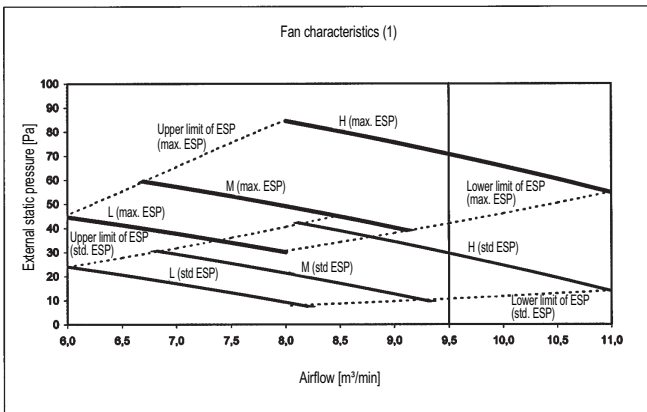

NOTES

- 1 Fan characteristics as shown ar in "fan only" mode.
- 2 ESP: External static pressure




3TW31208-1

12 Fan characteristics

12 - 1 Fan Characteristics

12

FXSQ40-50

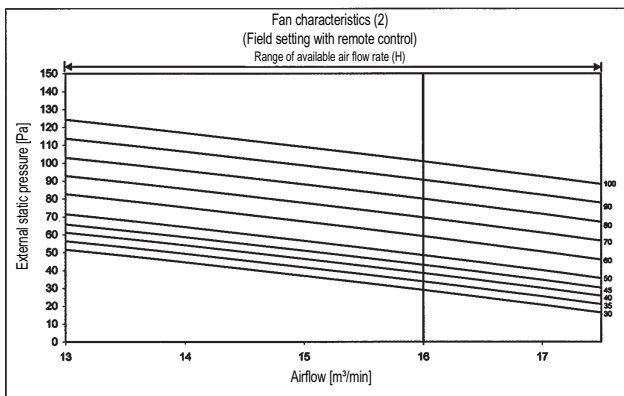
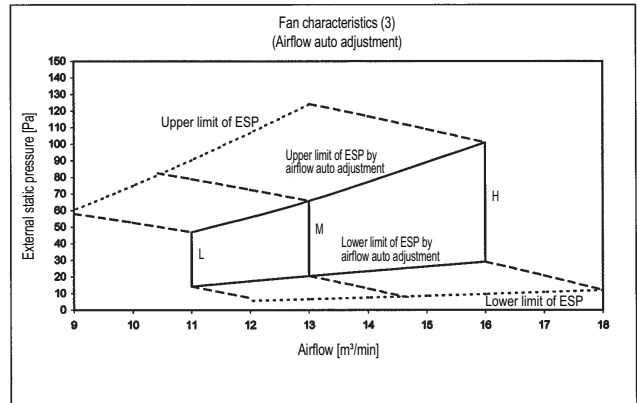
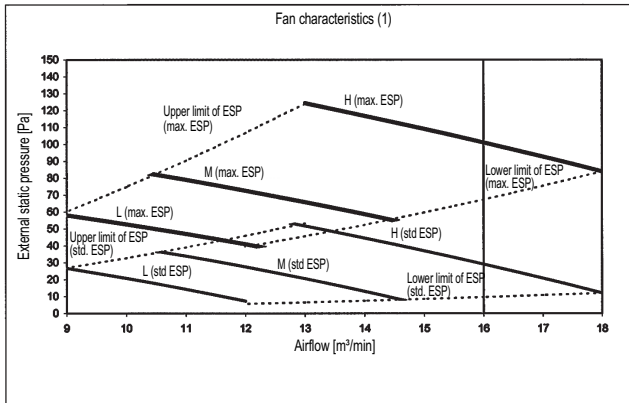


NOTES

- 1 Fan characteristics as shown ar in "fan only" mode.
- 2 ESP: External static pressure

3TW31218-1

FXSQ63P

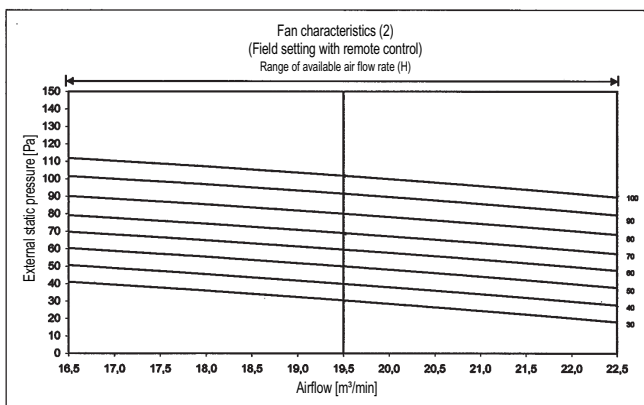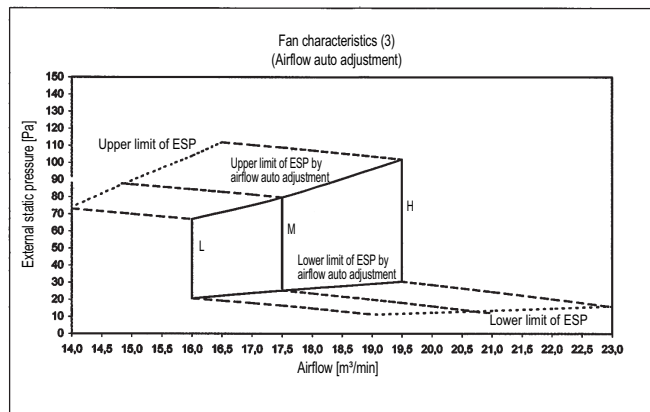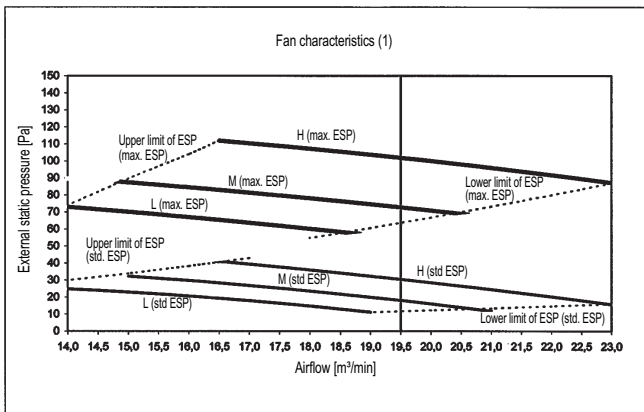

NOTES




- 1 Fan characteristics as shown ar in "fan only" mode.
- 2 ESP: External static pressure

3TW31238-1

12 Fan characteristics

12 - 1 Fan Characteristics

FXSQ80P7

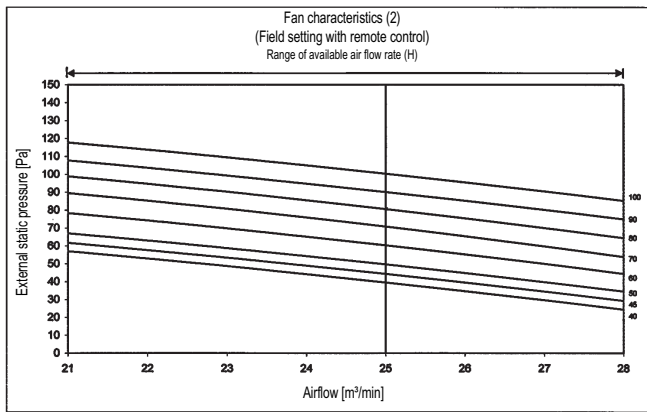
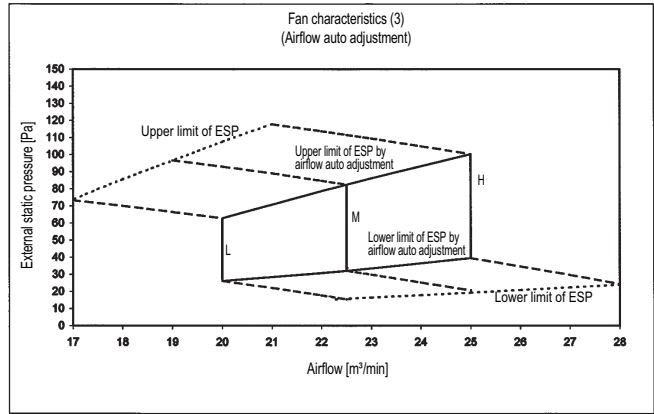
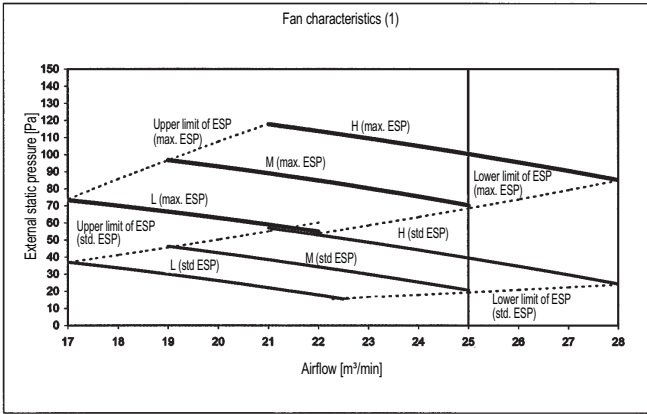


NOTES

- 1 Fan characteristics as shown ar in "fan only" mode.
- 2 ESP: External static pressure

3TW31248-1

FXSQ100P

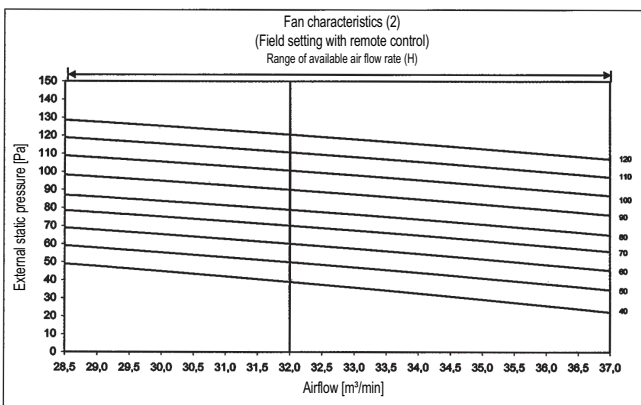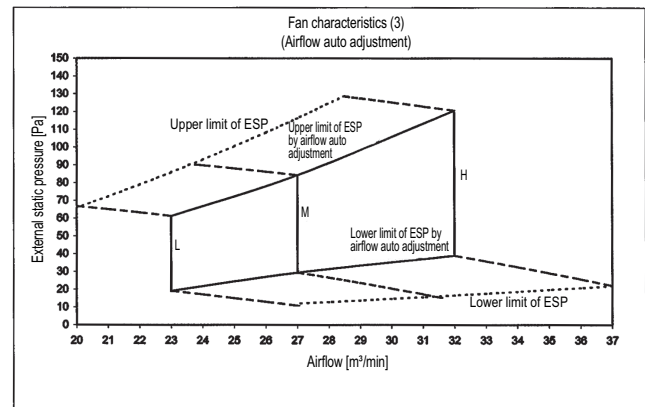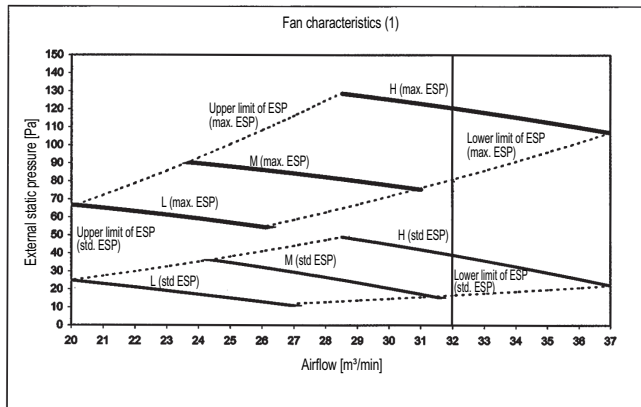

NOTES




- 1 Fan characteristics as shown ar in "fan only" mode.
- 2 ESP: External static pressure

3TW31258-1

12 Fan characteristics

12 - 1 Fan Characteristics

FXSQ125P

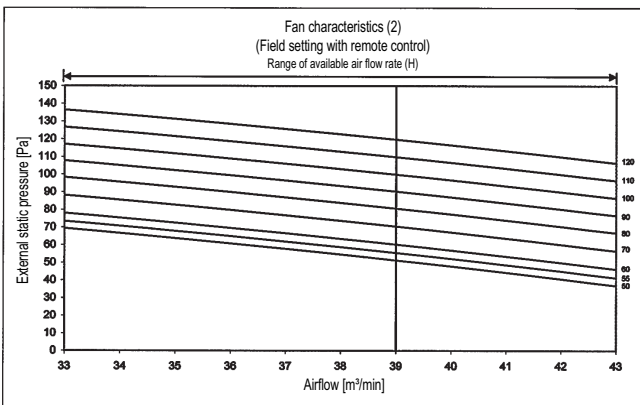
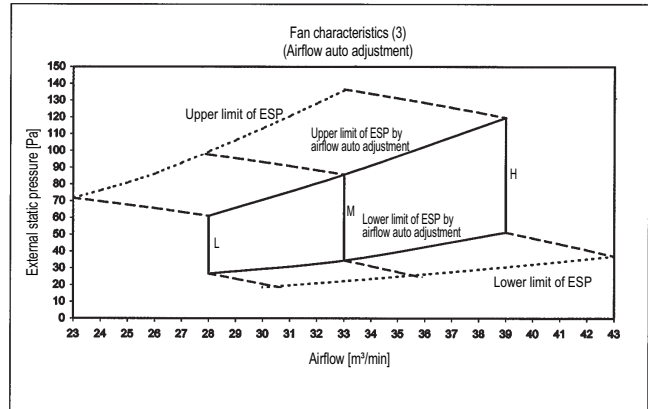
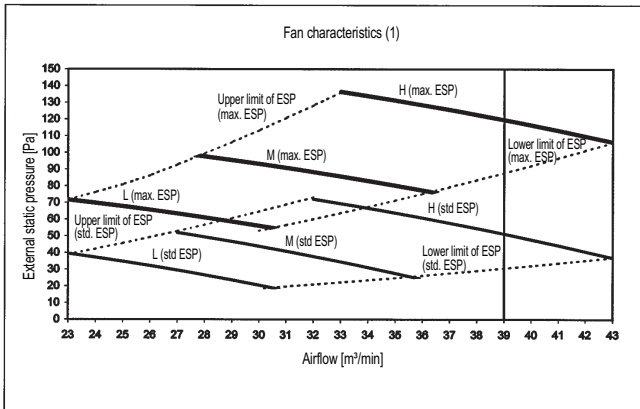


NOTES

- 1 Fan characteristics as shown are in "fan only" mode.
- 2 ESP: External static pressure

3TW31268-1

FXSQ140P

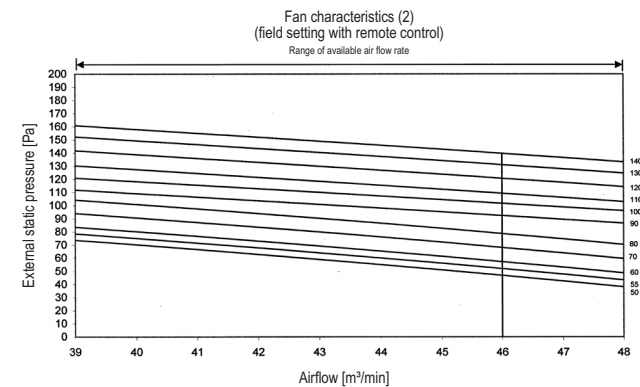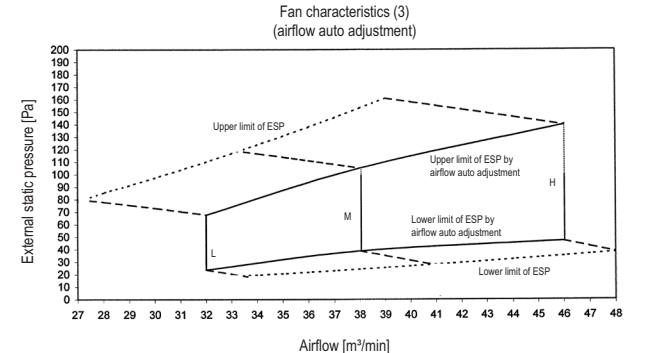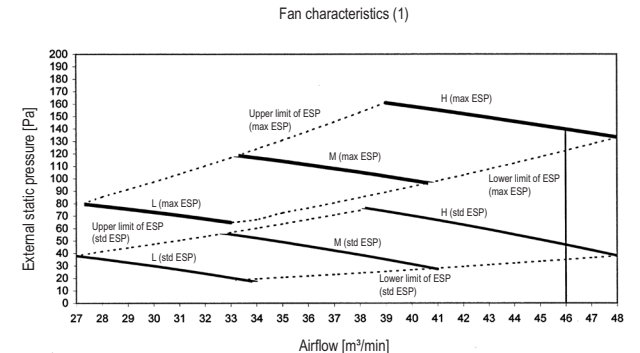

3TW32748-1

NOTES

- 1 Fan characteristics as shown are in "fan only" mode.
- 2 ESP: External static pressure.
- 3 If the ESP is higher than 100 Pa, do not use airflow auto adjustment function: select the fan step manually, by field setting with remote control.

13 Installation

13 - 1 Installation Method

FXSQ-P

Rear Suction	Bottom Suction
<p style="text-align: center;">Ceiling return</p>	<p style="text-align: center;">Ceiling return</p>
<p style="text-align: center;">Installation with duct</p>	<p style="text-align: center;">Direct installation of inlet panel EKBYBSD is required for direct installation</p>

Wide variety of installation methods

Number	Description	
1	Main body	
2	Air outlet duct	Field supply
3	Inlet panel	Optional accessory
4	Access panel	optional accessory
5	Air inlet duct	Field supply

Drain pump up height

Easy modification from rear to bottom suction


3TW31183-1A

13 Installation


13 - 2 Filter Installation Method

13

FXSQ-P

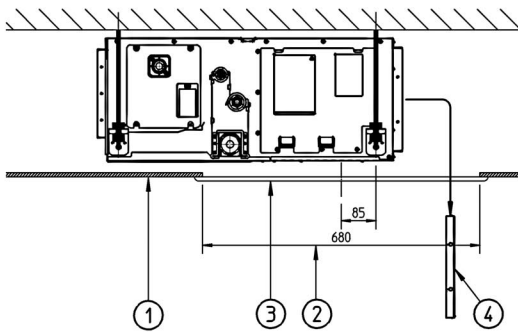

Installation without air inlet duct

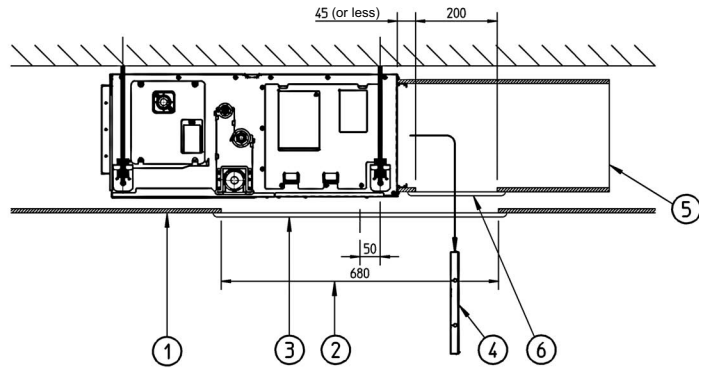


Installation with air inlet duct

Nr.	Description
1	Suspended Ceiling
2	Ceiling opening
3	Service access panel (optional)
4	Air filter
5	Air inlet duct
6	Duct service opening

NOTES


- 1 When installing the unit with rear suction, a service opening is necessary for the maintenance of the air filters.
- 2 When installing the unit with a suction duct. A service opening must be provided in the duct.

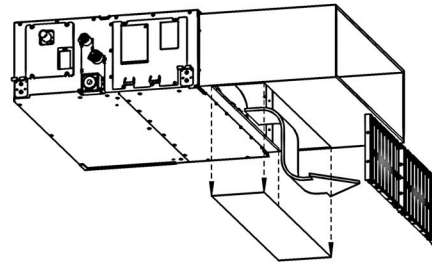

3TW31184-4

13 Installation

13 - 3 Switch Box Connection

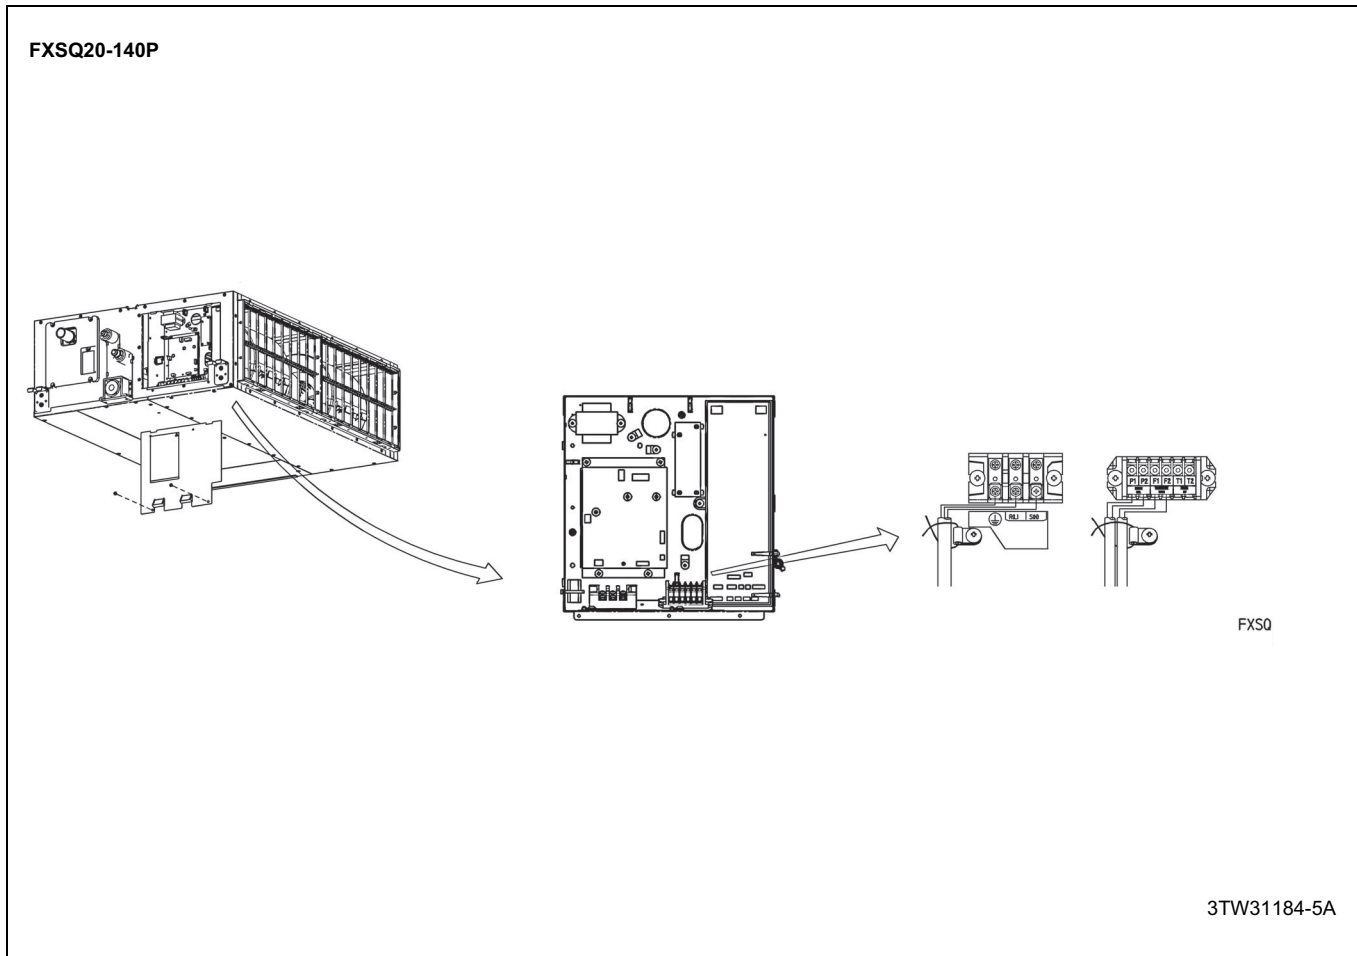



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

BARCODE

Daikin products are distributed by:

